

# VERUS ENGINEERING

## ZN6 / ZC6 Street Front Splitter and Race Upgrade Install Manual



Author: Eric Hazen  
Release Date: 2017/02/19  
Approvals: E. Hazen, P. Lucas

### Document Revisions

Rev	Date	Author	Description
01	2017/02/06	E.Hazen	Initial release of updated install manual format
02	2017/03/05	E.Hazen	Updated Race Upgrade Install Steps
03	2017/08/08	P. Lucas	Company name change from Velox to Verus

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

---

ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

# CONTENTS

1. Introduction .....	<3>
1.1. Overview .....	<3>
1.2. Difficult .....	<3>
1.3. Time Required .....	<3>
1.4. Tools Needed .....	<3>
1.5. Street Splitter Components .....	<3-4>
1.6. Race Upgrade Components .....	<3-4>
2. Front Splitter Install .....	<4-9>
3. Race Upgrade Install .....	<9-19>

---

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

### 1. Introduction

**1.1. Overview:** Detailed instructions on installing the two piece front splitter with supplied support rod kit for the ZN6 ZC6 chassis.

**1.2. Difficulty:** Beginner to Moderate

**1.3. Time Required:** 2.5-4 hours

**1.4. Tools Needed:**

1.4.1. Splitter Install

- 1.4.1.1. Jack and Jack Stands
- 1.4.1.2. Screwdriver
- 1.4.1.3. 10mm Socket
- 1.4.1.4. 4mm Allen Wrench
- 1.4.1.5. 5mm Allen Wrench
- 1.4.1.6. 9/16" wrench

1.4.2. Race Install

- 1.4.2.1. Center Punch
- 1.4.2.2. 1/8" or starter drill bit
- 1.4.2.3. 1/4" drill bit
- 1.4.2.4. Drill
- 1.4.2.5. Spray paint/touch up paint
- 1.4.2.6. Flat Head
- 1.4.2.7. Small Philips

**1.5. Splitter Components**

1.5.1. Front Splitter

1.5.2. Hardware Bag

- 1.5.2.1. (2) M6 x 1.0 Button Head Cap Screw (BHCS) x 16mm Long
- 1.5.2.2. (12) M6 x 1.0 BHCS x 30mm Long
- 1.5.2.3. (2) M6 x 1.0 BHCS x 60mm Long
- 1.5.2.4. (2) M6 Aluminum Spacer
- 1.5.2.5. (12) M6 x 38mm Diameter Fender Washer
- 1.5.2.6. (2) M6 x 18mm Diameter Washer
- 1.5.2.7. (10) M6 x 1.0 Plastic Rivets
- 1.5.2.8. (8) 3/8" ID Rivet Nut Backing Washers
- 1.5.2.9. (1) Rivet Nut Install Tool
- 1.5.2.10. (2) Rivet Nut Install Bolts
- 1.5.2.11. (4) 10mm Nylon Spacers
- 1.5.2.12. (2) M6 x 1.0 Flanged Nuts

**1.6. Splitter Race Components**

- 1.6.1. (2) Splitter Rods
- 1.6.2. (2) Left-hand rod ends
- 1.6.3. (2) Right-hand rod ends

---

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

- 1.6.4. (2) Billet Aluminum Clevis Mounts
- 1.6.5. (4) Crash Beam Mounts
- 1.6.6. (1) Support Brace
- 1.6.7. (1) Two Piece Splitter Bracket
- 1.6.8. (8) Splitter Vanes
- 1.6.9. Hardware Bags
  - 1.6.9.1. (16) M6 x 1.0 Flat Head Cap Screw (FHCS), 35mm Long
  - 1.6.9.2. (16) M6 x 1.0 Nyloc Flange Nut
  - 1.6.9.3. (8) M6 x 18mm Diameter Washer
  - 1.6.9.4. (12) M6 x 1.0 Serrated Flanged Nut
  - 1.6.9.5. (4) M6 x 12mm Diameter Washer
  - 1.6.9.6. (6) M6 x 1.0 BHCS, 25mm Long
  - 1.6.9.7. (8) M6 x 1.0 BHCS, 16mm Long
  - 1.6.9.8. (2) M6 x 38mm Diameter Washer




## 2. Front Splitter Install

- 2.1. Velox is not responsible for damage to you or your vehicle by following this manual and/or installing Verus Engineering products.
- 2.2. We begin by jacking the car up. You'll want to choke the rear wheels and use the e-brake.
- 2.3. Place a jack stand on either side of the car, you can use the frame rails or the pinch welds.
- 2.4. With the front of the car off the ground, we'll want to start by removing the underbody plastic piece. This piece is quite large and has multiple plastic push rivets and a few bolts holding it on. There will be six push pins (shown in red), and three 10mm bolts to remove (shown in yellow).

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 2.5. We now install the rivet nuts into the car's underbody. View the below photo to ensure the correct holes are used. **No holes should need to be drilled!** The photo below is only the passenger side of the car but the driver's side is a mirror image.

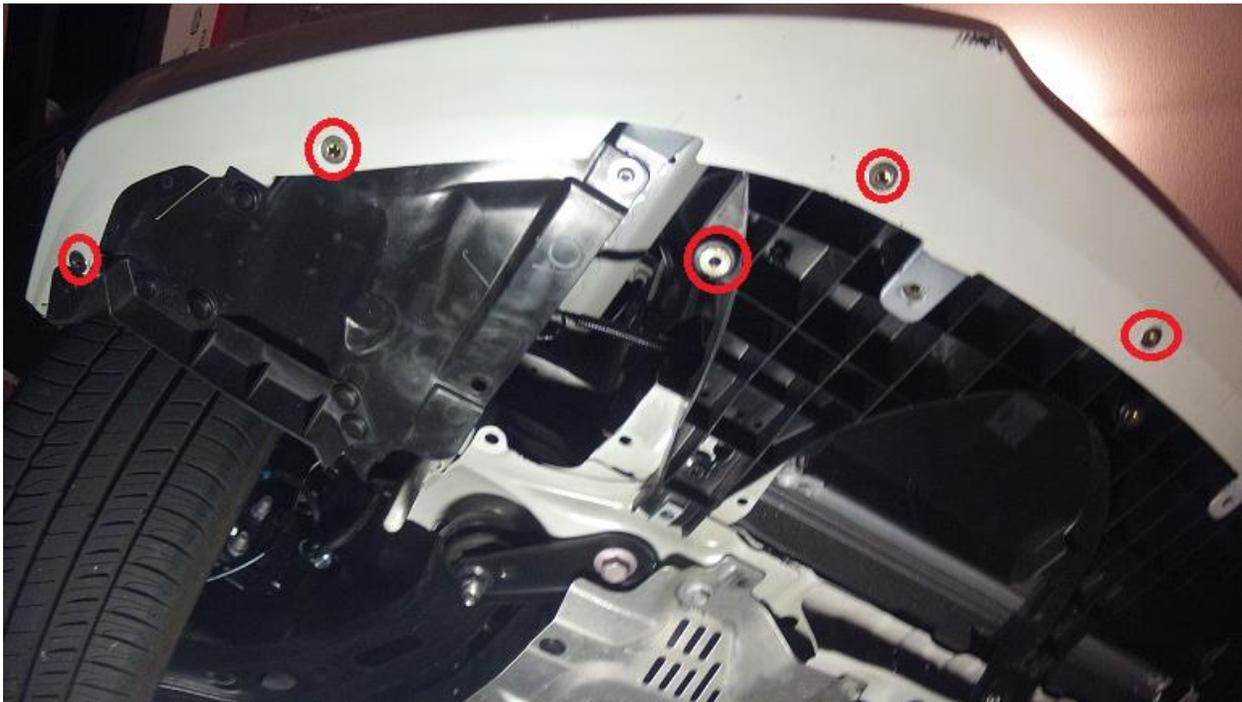

- 2.6. To properly install the rivet nut, you'll want to thread the rivet nut onto the tool as shown below.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 2.7. Place the rivet nut into the hole. If you'd like to use the rivet nut backing washer, you'll need access to the top side of the material you are riveting onto. Note, the backing washer is not necessary but will decrease the chance that the rivet gets pulled through the bumper.




- 2.8. Using the 9/16" wrench and the 5mm allen wrench, hold the nut steady and tighten the allen bolt. You'll have some initial resistance, then the rivet nut will begin to pull tighter on the material. **Use oil on the threads to ensure they do not gall.**
- 2.9. Alternatively you can purchase or rent a rivet nut install tool from your local hardware store or automotive store. Shown below is another tool to use for install which is easier to use.



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.


## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

- 2.10.** Below are pictures of a properly installed rivet nut. We did not use the backing washers here though feel free to if you would like, they are supplied with each kit.

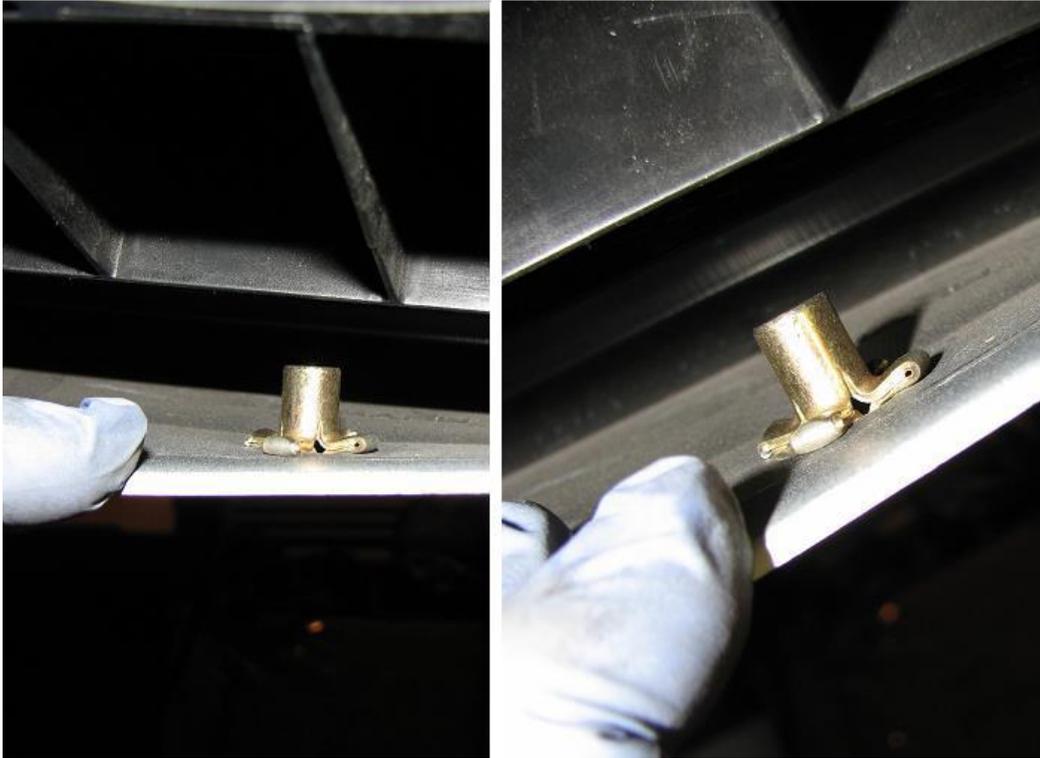

- 2.11.** If you own a BRZ, you'll need to remove the bumper to install the support rod kit. Skip to step 3. If you own an FRS, you can remove the grille without a large issue and can continue on with the steps below.
- 2.12.** Install the two M6x1.0 x 16mm BHCS with two washers on the wheel liner plastic (left and right side).

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

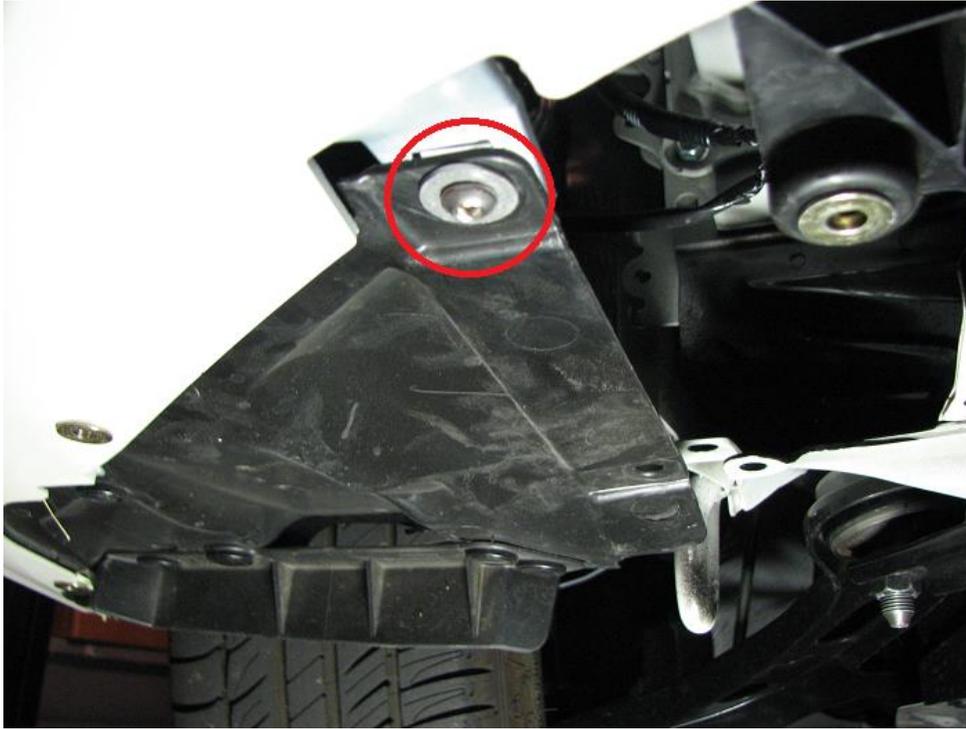

- 2.13. Install the splitter with the M6x1.0 x 30mm BHCS with large washers on each of the rivet-nuts.
- 2.14. Utilize the aluminum spacer and the 30mm long BHCS on the two most rearward holes.
- 2.15. Finally, install the (2) radiator support bolts, with spacers and nut as shown below.



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

---

**ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual**

- 2.16.** We suggest to leave all bolts loose until they are all in and then tighten from the inside out. We also suggest you have the splitter held up by 4 or more bolts before letting the splitter free hang.



### **3. Front Splitter Race Upgrade Installation**

- 3.1.** We assume you are beginning the install at step 2.10, with all the rivet nuts installed but the splitter still off the car.
- 3.2.** At this time we can install the splitter vanes, which add downforce over the Street Front Splitter. Locate the (16) engraved hole centers which locates where the splitter vanes are to be installed.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 3.3.** Utilizing the center punch and counter sink, increase the size of these engraved holes to decrease the chance of the drill bit wandering while drilling. Using a drill and 1/4" drill bit, drill the 16 holes as straight through as possible. Place the splitter on something soft to reduce scratching the surface (I used a towel on the leading lip and then propped it up on the wood as shown below).




- 3.4.** Find the bags with the M6x1.0 x 35mm long FHCS and the M6 Nyloc Flanged Nuts. Use a 4mm Allen wrench and a 10mm socket on a ratchet to tighten these vanes to the **\*bottom\*** of the splitter. There is no need to over tighten these as the nylon in the nuts will lock the bolts in place.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 3.5.** Place the splitter somewhere safe now that the vanes have been bolted on. Next up is to remove the plastic tray between the front bumper and the radiator support. This will allow you to reach your hands up to tighten the nuts and bolts for the crash beam supports. Remove the plastic push pins with a screwdriver (located in purple/blue). Also remove the (3) 10mm bolts with a ratchet and socket (located in red).

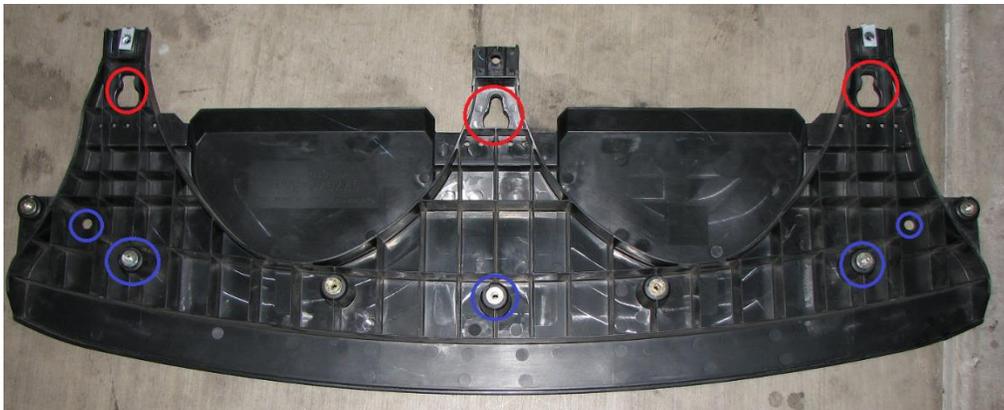

- 3.6.** We have to remove the bumper for this part of the install if you own a BRZ. **If you own an FR-S, the bumper can remain on and the grill removed and you can skip to step 3.11.**
- 3.7.** To remove the front bumper, remove the strip of 10mm bolts and plastic push pins across the top of the front bumper under the hood.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual




- 3.8.** Then on each side of the car in the wheel wells, remove 4 plastic screw pins. Three are located down low (see below photo), the last one is up by the turn signal on the inside of the fender. Ignore that the splitter is installed in this photo, it was taken after the installation.



- 3.9.** The turn signal has to be removed to expose the final plastic push pin and then the front bumper will come off. There is a metal tab that needs to be push towards the **\*front\*** of the car. The arrow in the picture shows this well. I used a flat head screwdriver to push this forward and then gently pried the signal away from the car.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

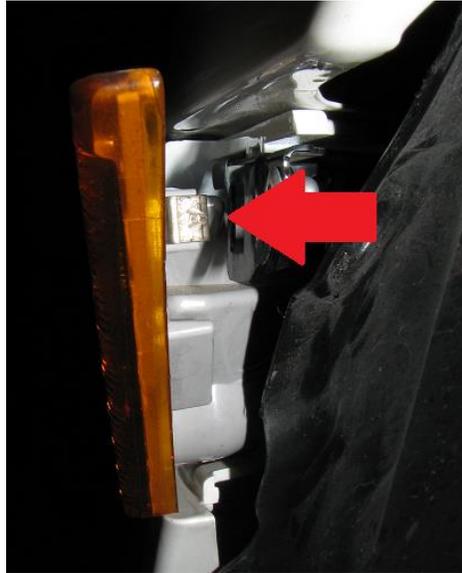


- 3.10.** The final push pin is circled here! Remove this and gently pry around the front bumper to remove it completely.




- 3.11.** Up next is drilling the front crash beam. You will notice that there are raised portions of the crash beam and then portions with spot welds on it. You will want to drill the raised portions as drilling through a spot weld can get bad quickly. The splitter supports were designed around an **18.50" spread**, which leaves **\*6 raised\*** sections between the brackets. Center punch the next 4 raised portions, using the brackets to ensure that you can bolt them on the crash beam in the location necessary for a proper install with the grill.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

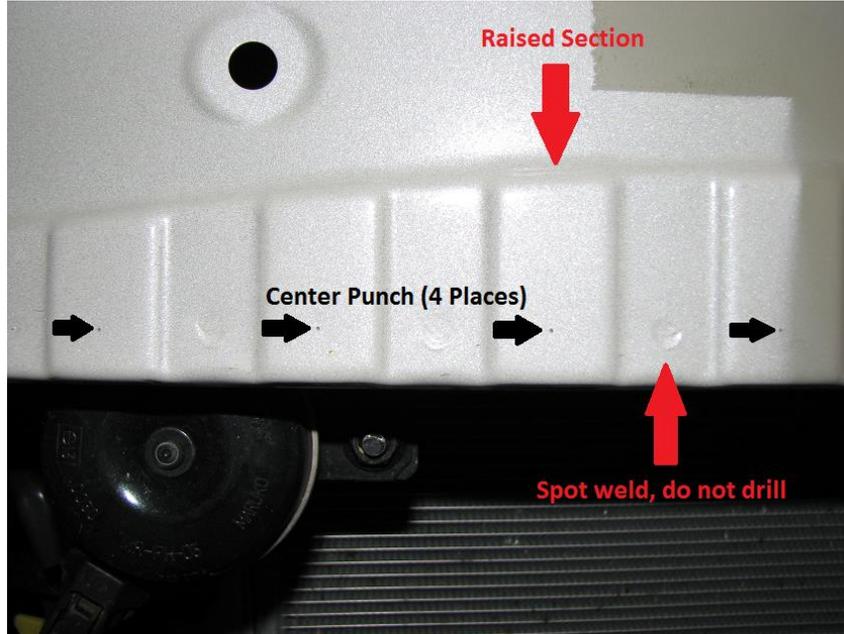

- 3.12.** It is recommended to use a starter drill bit next (top left of picture) as these can greatly help cutting through sheet metal and ensuring that the drill is going through the material straight.

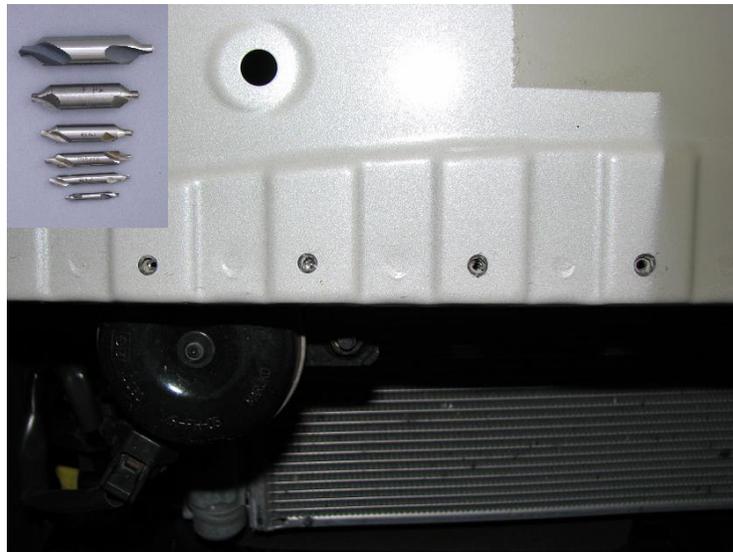


- 3.13.** Using the 1/4" drill bit, drill through both parts of the sheet metal. Vacuum out all of the metal shavings you can. It is recommended to spray the holes with spray paint (at the very least) and underbody rust resistant if you have some. This ensures that the crash beam will not rust for years to come.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 3.14.** Ensure that the brackets will fit and that they can slide together till there is a 10mm gap between the two mounting holes for the splitter tie rods. Do this by using the (8) M6 x 1.0 x 16mm long BHCS, (8) M6 x 18mm, and the (8) M6 x 1.0 flanged nuts. You do not need to tighten these down, just enough to know if the brackets will work once the bumper is put back on. Once you ensure the holes were drilled properly, remove the brackets and reinstall the bumper in reverse order
- 3.15.** Once the bumper is back on, start by installing the crash beam mounts first. Like before, use the M6 x 1.0 x 16mm bolts, a washer on the bolt side and the nut on the back side of the crash beam. It will likely be necessary to move the horn; this can easily be done by loosening the 10mm bolt. Do **\*not\*** fully tighten the brackets to the support yet. Once all 4 of these brackets are loosely installed, install one side of the splitter rod on each side. Tighten this to ensure the brackets can fully clamp the rod end. Once this is done, find the final position (left or right) you want the splitter rod to rest and tighten the crash beam mounts fully. Below is both a BRZ and an FRS install (note BRZ install has our old, obsolete rod end design).

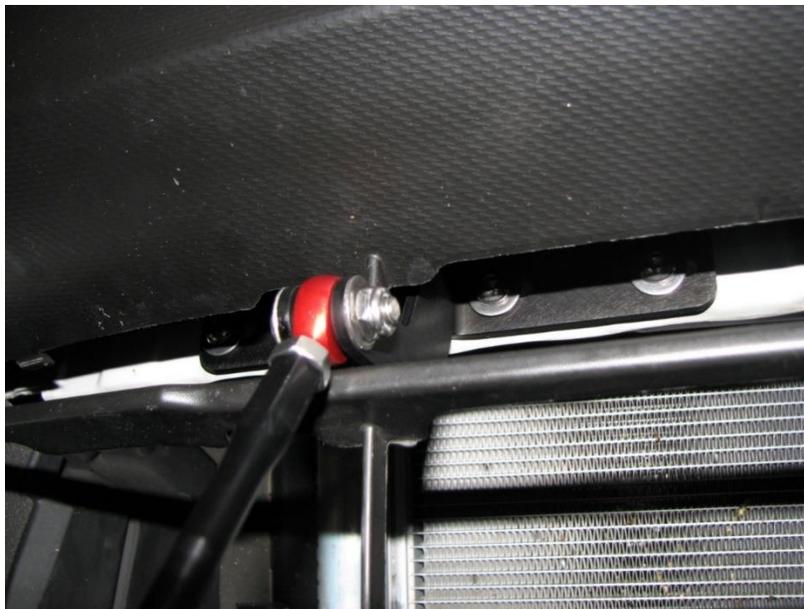

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 3.16.** Using the 4mm allen wrench and the 10mm wrench, tighten the rod end into the clevis, a washer is used between the bolt and the clevis. Use the 25mm long bolt and the M6 flanged nut on the other side.



- 3.17.** With the splitter fully installed, we can make the holes for the clevis to bolt to.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

- 3.18.** Place the lower aluminum plate underneath the splitter, roughly centered, and mark the center of the two slots as shown below.



- 3.19.** Center punch this mark then drill straight through this mark with a 1/4" drill bit. This is how we will mount the bottom of the support rod to the splitter.
- 3.20.** Using the 25mm long M6 BHCS and the large fender washer from the bottom side, bolt through the support bracket, splitter, and capture the clevis to the top side of the splitter.



- 3.21.** Ensure that the splitter is near horizontal by using a level. The front of the splitter's level is now controlled by the support rod system. Lengthen it to lower the front of the splitter, shorten it to raise the front of the splitter. **The splitter rod is both left hand and right hand thread, keep this in mind.**

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual

- 3.22. At this point, everything should be installed on the car and can be fully tightened. Ensure all bolts and nuts are tightened on the underside of the splitter and the support rods are fully tightened as well.
- 3.23. On the support rods themselves, hold the support rod steady and then tighten the nut on each end to keep the support rod from turning.
- 3.24. We have now concluded the install of both systems, admire your hard work! The splitter can see over 200 lbs of downforce at this point. ***It is not wise to stand on the splitter, it can handle this load but the aluminum bracket beneath can bend and lead to distortion. Air pressure is even and two foot points are not.***



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

## ZC6 / ZN6 Street Front Splitter and Race Upgrade – Install Manual



- 3.25.** Please contact Verus Engineering with any questions, comments, concerns, and feedback via [sales@verus-engineering.com](mailto:sales@verus-engineering.com).