

VERUS ENGINEERING

Mk5 Toyota Supra Resonator Delete

Install Manual



Author: Eric Hazen

Release Date: 2020/01/11

Approvals: E. Hazen, C. Warner

Document Revisions

Rev	Date	Author	Description
01	2020/01/11	E. Hazen	Initial release of install manual

A90 Toyota Supra Resonator Delete – Install Manual

CONTENTS

1. Introduction	<3>
1.1. Overview	<3>
1.2. Difficulty	<3>
1.3. Time Required	<3>
1.4. Tools Needed	<3>
1.5. Resonator Delete Components	<3>
2. Resonator Delete Install	<3-7>

A90 Toyota Supra Resonator Delete – Install Manual

1. Introduction

1.1. Overview: Detailed instructions on installing the resonator delete for the Toyota Supra.

1.2. Difficulty: Beginner

1.3. Time Required: 0.25 - 0.5 hour

1.4. Tools Needed:

1.4.1. Flat Head Screwdriver

1.4.2. T20 Torx

1.5. Resonator Delete

1.5.1. (1) Resonator Delete



2. Resonator Delete Installation

2.1. Verus is not responsible for damage to you or your vehicle by following this manual and/or installing Verus Engineering products


2.2. We begin by popping the hood.

2.3. Loosen hose clamp with flat head screw driver. This is shown below with a red arrow.

A90 Toyota Supra Resonator Delete – Install Manual



2.4. Remove the (4) intake filter box clamps, these are pointed out with the (4) yellow arrows.

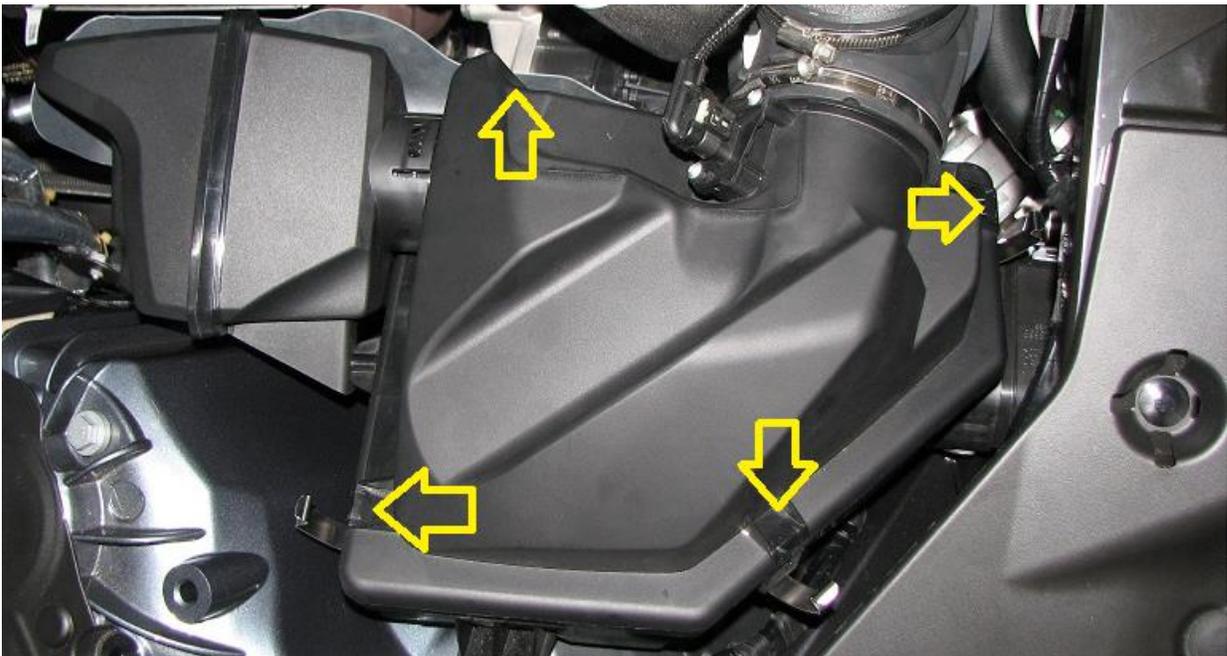

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

A90 Toyota Supra Resonator Delete – Install Manual

2.5. Flip the top of the intake box over, being careful of the IAT sensor wires.



2.6. We can now remove the (2) T20 torx bolts holding the resonator on the air box. These are circled in red below.



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

A90 Toyota Supra Resonator Delete – Install Manual

- 2.7. Utilizing the flat head screwdriver, remove the factory resonator from the air box. Simply pry up and rearward.



- 2.8. The factory resonator should be off at this point.
- 2.9. To install our resonator delete, slip the unit on with the factory o ring in place. You can use a bit of silicone grease to aid in install if you would like.



- 2.10. Reinstall air box with the (4) clips.
- 2.11. Tighten the clamp on the air box.

Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.

A90 Toyota Supra Resonator Delete – Install Manual

- 2.12.** This concludes the resonator delete kit for the Toyota Supra. Please send any comments, concerns, questions, and general feedback to Verus Engineering via sales@verus-engineering.com.



Confidential: Property of Verus Engineering. Not for Distribution outside intended recipient list.