

991 PORSCHE GT3

PERFORMANCE OF VERUS ENGINEERING VENTUS PACKAGES

OVERVIEW


SUMMARY : AERODYNAMIC FORCES.....	pg.3
SUMMARY : REAR WING FORCES.....	pg.4
VENTUS PACKAGES.....	pg.5
DEFINITIONS.....	pg.6
DIVE PLANES / CANARDS DETAILS.....	pg.7-8
REAR WING DETAILS.....	pg.9-10
SPLITTER DETAILS.....	pg.11-12
SUMMARY.....	pg.13
THE SCIENCE.....	pg.14
Cp PLOTS.....	pg.15
CpX PLOTS.....	pg.16
CpZ PLOTS.....	pg.17

SUMMARY : AERODYNAMIC FORCES

Aerodynamic forces change with the square of vehicle speed which is why we share graphs of the data instead of listing a force.


When developing an aerodynamic package, Verus Engineering focuses on maximizing efficiency while increasing downforce significantly. In other words, we look at creating downforce while keeping drag increases minimal or negligible.

Efficient downforce will decrease lap times and improve vehicle performance. The benefit of an entire package is keeping a factory like aerodynamic balance while increasing vehicle downforce.

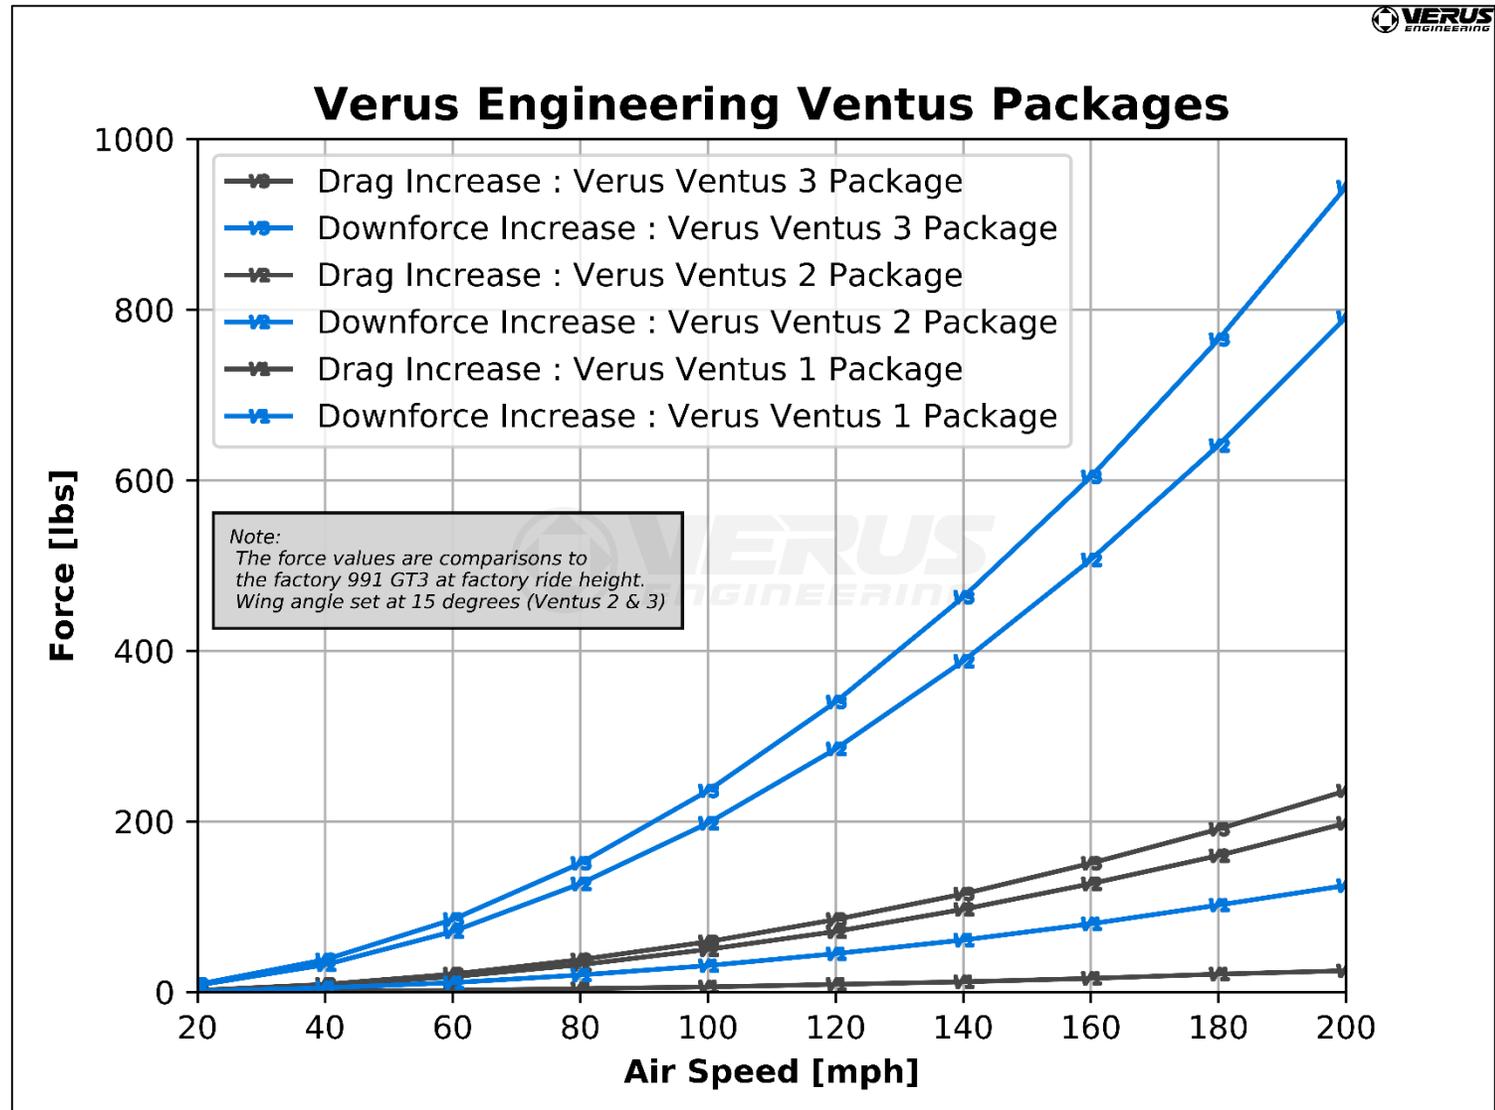


SUMMARY : REAR WING FORCES (PART OF VENTUS 2 & 3 PACKAGE)

The UCW might need to be adjusted to fine tune the balance for driver preference.

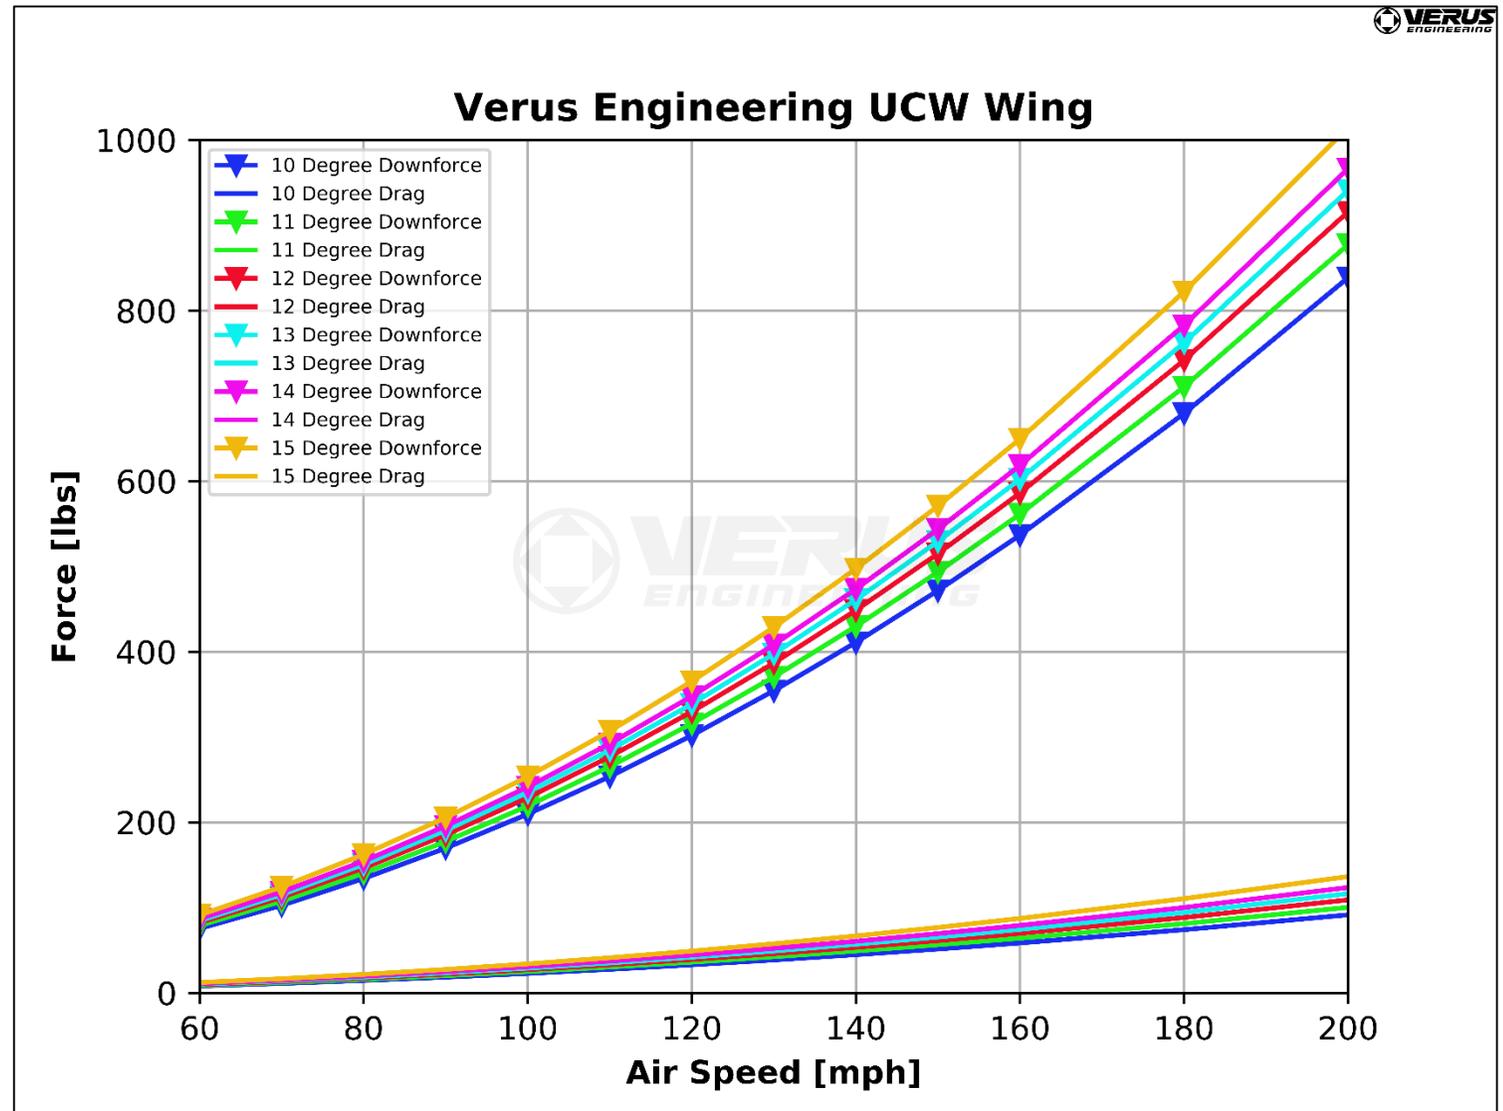

VENTUS PACKAGES

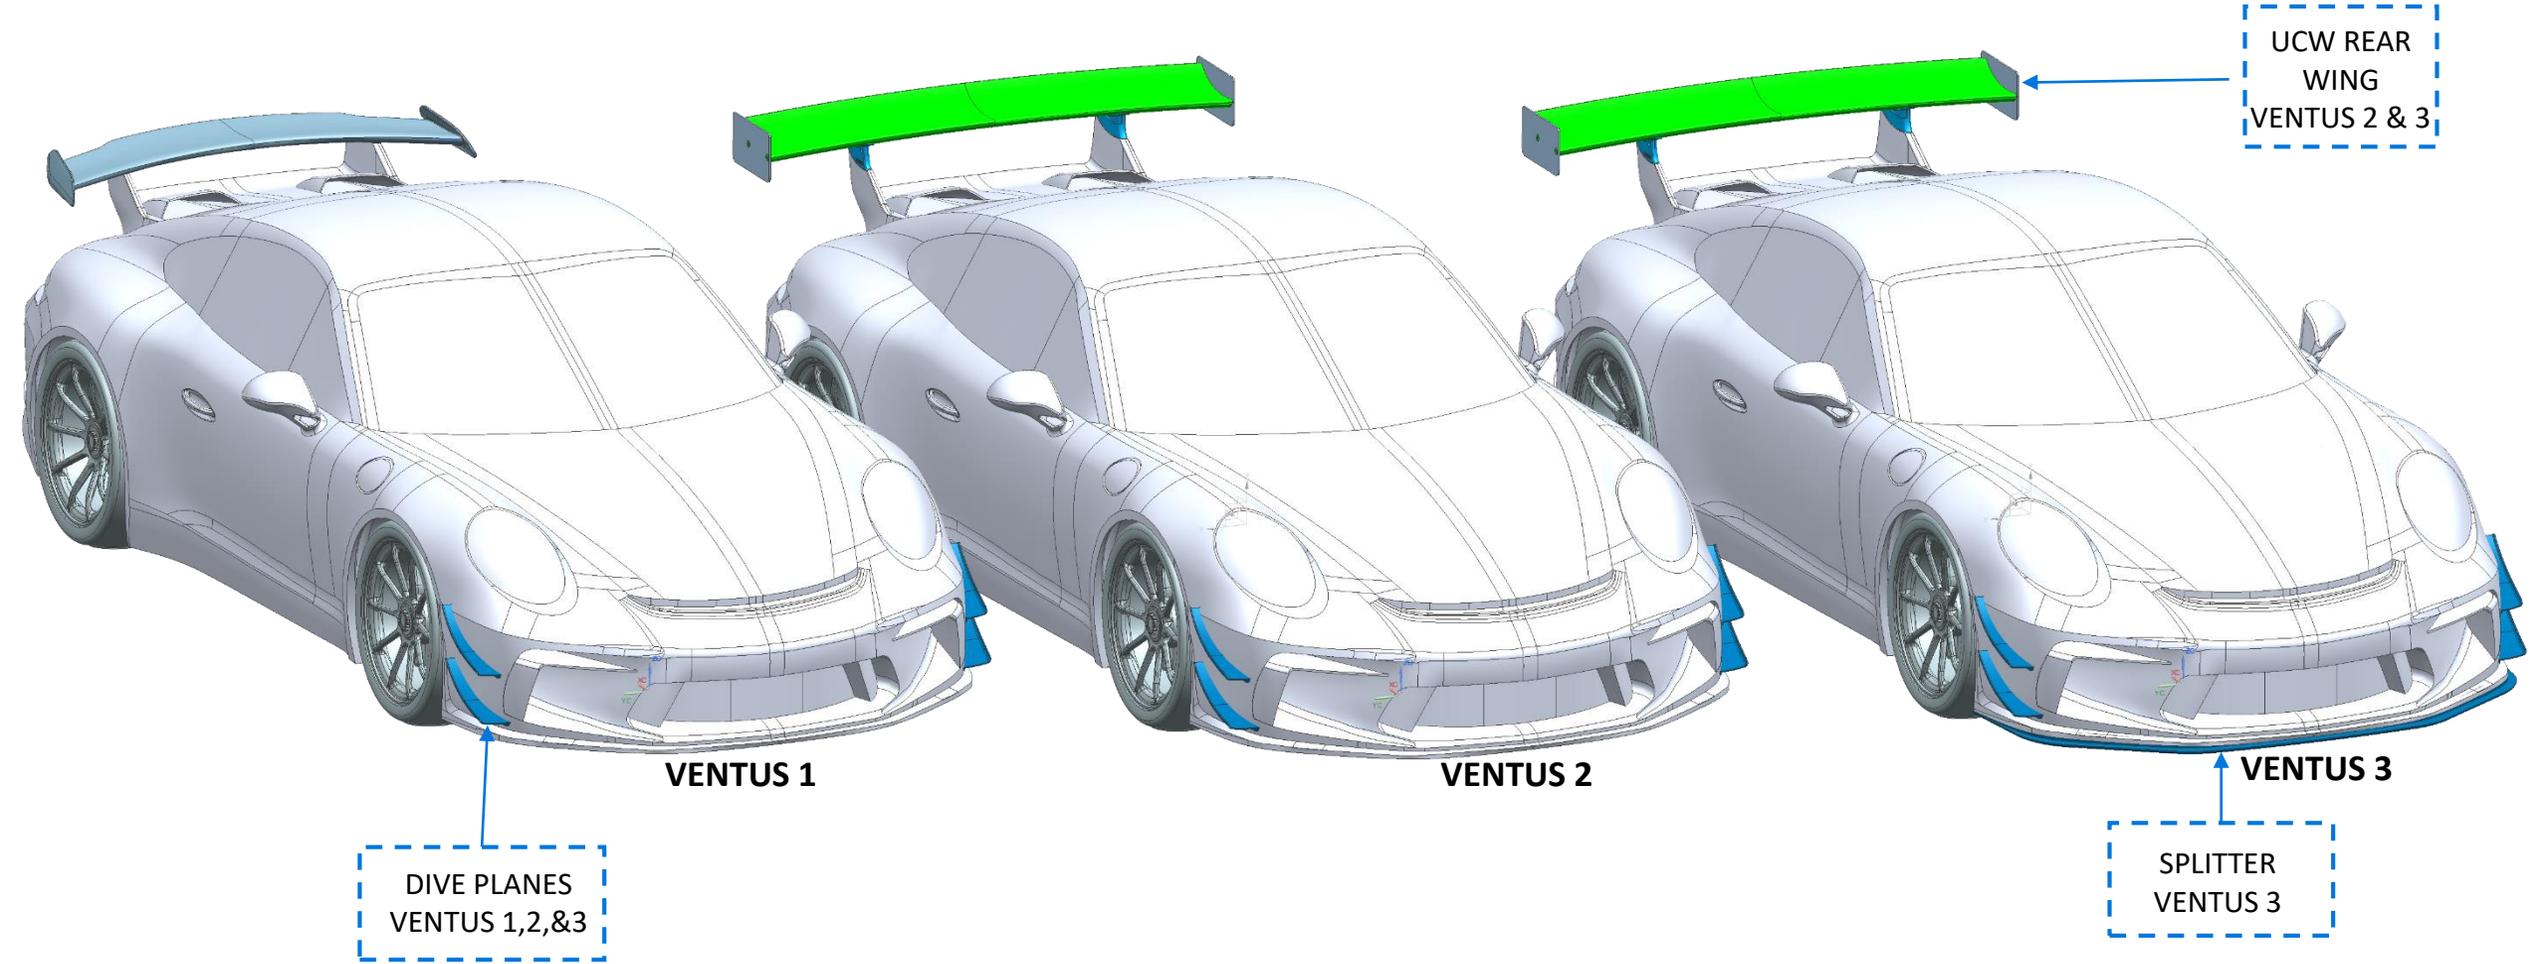


DEFINITIONS

1. **Coefficient of Pressure (Cp)** = This is a dimensionless number which describes relative pressure to atmospheric pressure. A Cp of 0 equates to atmospheric pressure while a number below 0 represents low pressure and a number above 0 represents high pressure.
2. **CpX** = This is a dimensionless number which describes Cp normal to the x-direction. This helps us visualize locations which create drag. Red represents locations which are creating drag, while blue represents locations where thrust is created.
3. **CpZ** = This is a dimensionless number which describes Cp normal to the z-direction. This helps us visualize location which create downforce or lift. Red represents locations which are creating lift, while blue represents locations where downforce is created.
4. **Total Pressure Coefficient (CpT)** = This is a dimensionless number which describes total energy of the airstream. It is the sum of static pressure and dynamic pressure.
5. **Wall Shear** = This is a force per unit area due to fluid friction on the wall. This is used to visualize areas of separation and rapid changes on the surface.
6. **LIC Plot** = Line integral convolution (LIC) is used to visualize “oil” flow on the surface. It is a great way to correlate to flow vis testing and to study the flow on the surface of the vehicle.
7. **Streamline** = These are fluid tracers which are used to visualize where the air is going or coming from. These are normally colored as velocity where red is high-velocity and blue is low-velocity.
8. **Points** = One point is considered 0.001 of a coefficient. This is used in coefficient of drag (Cd) and coefficient of lift (Cl).

DIVE PLANE / CANARD DETAILS


Dive planes can serve a variety of purposes. While most people believe dive planes produce downforce by the airflow on the units themselves; Verus Engineering does significantly more with the development of these units to increase effectiveness.

1. A small part of the downforce created by the dive planes is from the forces on the surface of the dive planes themselves. The bottom side of the dive planes are lower pressure while the top side is higher pressure. This creates a downward force. This is not the full story however.

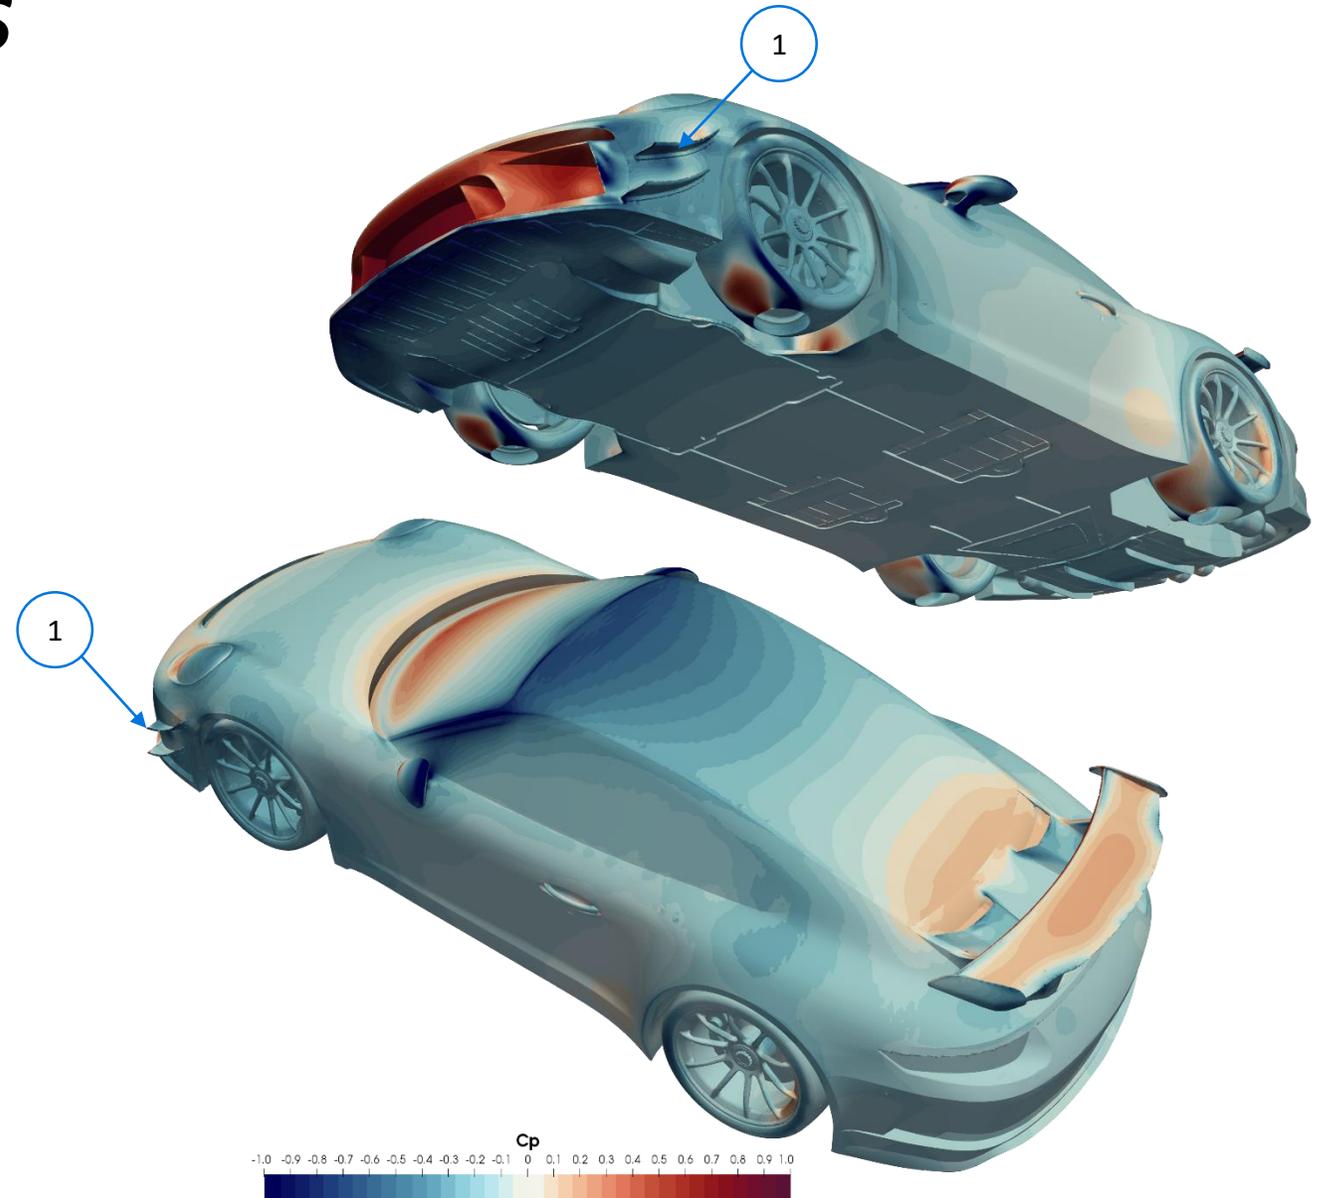

DIVE PLANE / CANARD DETAILS


1. The main way downforce is created with Verus Engineering Dive Planes / Canards is controlling airflow around the car. We use the dive planes to create a vortex which helps pull air out of the fender wells. This helps reduce lift on the body of the car. We have specific templates for the dive planes since location and placement are critical for maximum performance.

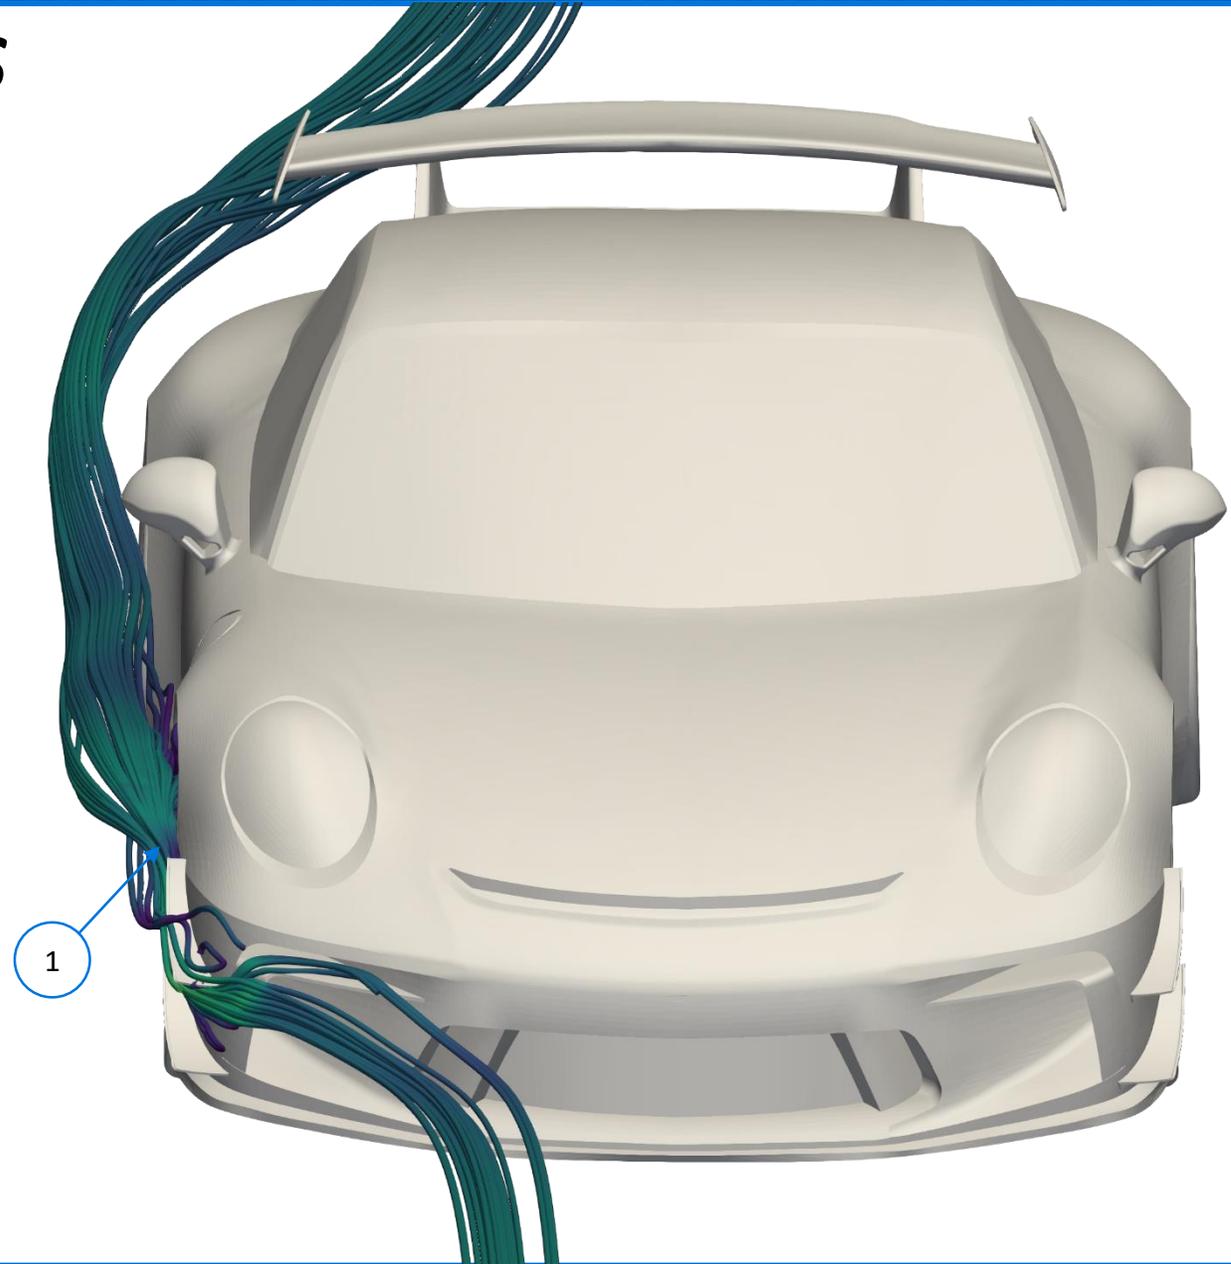

REAR WING DETAILS

The Verus Engineering Rear Wing for the 991 GT3 is our UCW unit, which was developed specifically for medium downforce levels. The profile was developed and maximized using optimization software and produces efficient downforce for rear wings.

1. The bottom surface is where nearly all the work is done for making downforce on the wing. It is low pressure which is pulling the rear of the vehicle down.
2. The top surface also creates downforce, just not as much. The C_p does not go above 0.6 compared to the bottom which is less than -1. In other words, the bottom side is working significantly harder than the top at producing downforce.

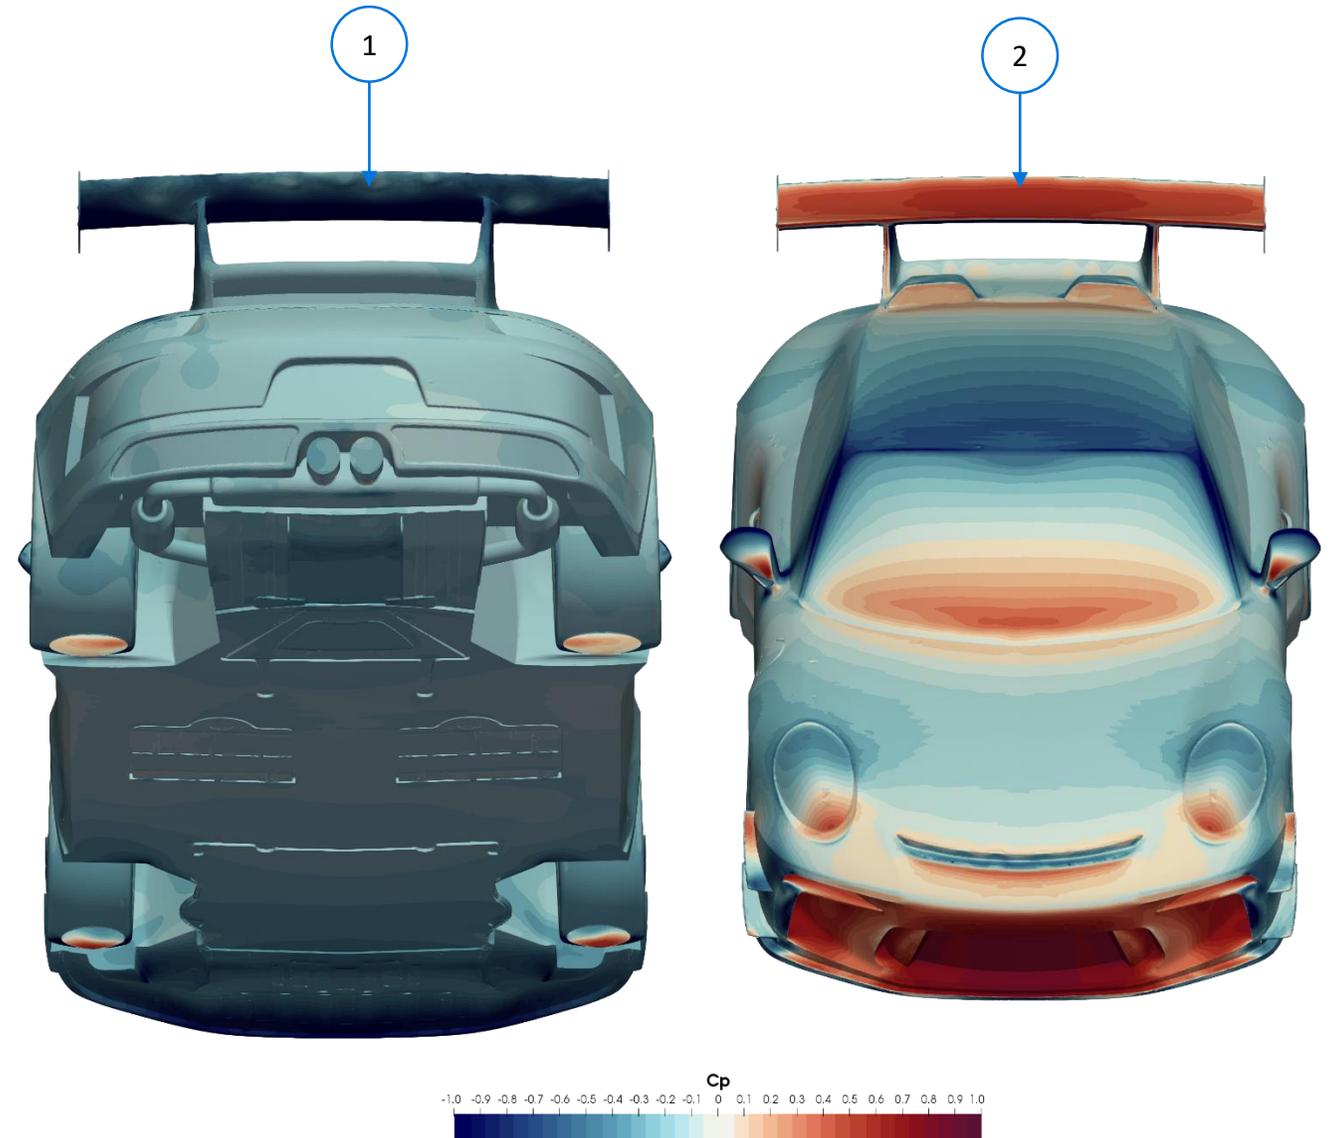


REAR WING DETAILS

The velocity on the bottom side of the wing is higher than the top side which causes the pressure differential between the top and bottom surfaces. The wing also changes the direction of the overall airflow on the rear of the car from aiming downward to straight rearward/slightly up. This is a positive change and signifies the rear wing is working well.



SPLITTER DETAILS


The Verus Engineering Front Splitter is ideal for increasing front-end downforce. While the splitter is a flat component, it makes significant front downforce since it is using ground effects. The full splitter assembly is simulated. The full splitter assembly has an efficiency [L/D] of 45. Splitters are a very efficient downforce creating component for vehicles.

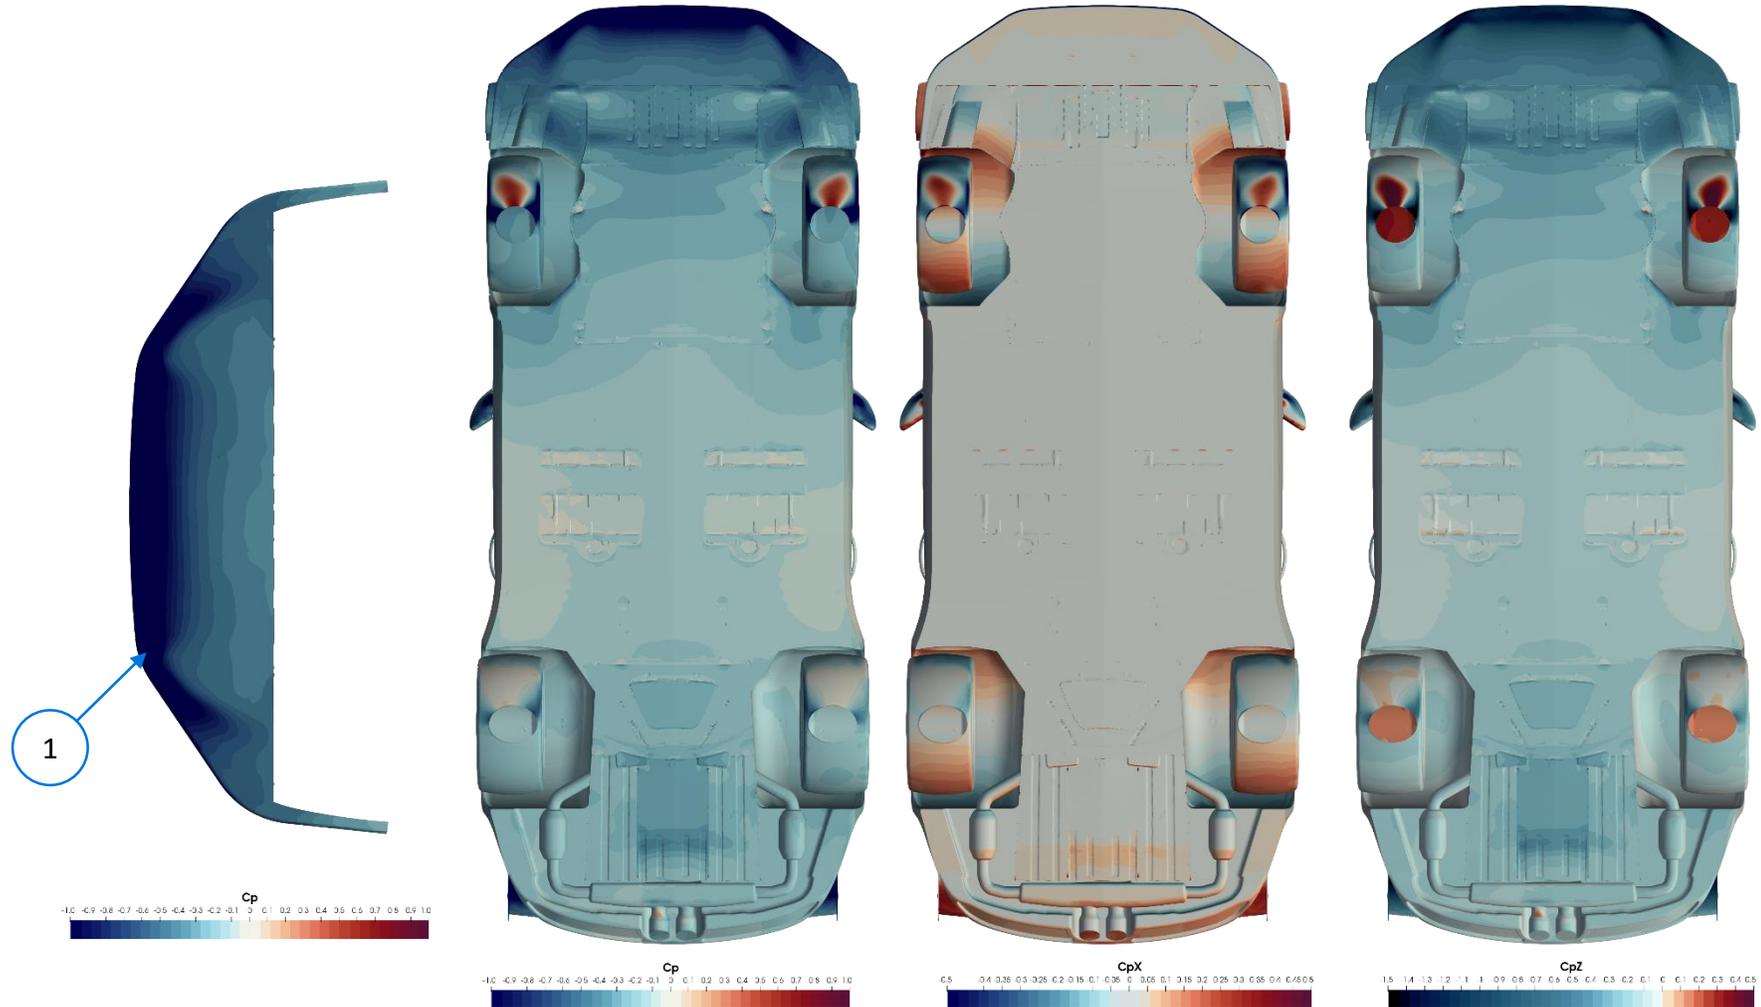

1. Peak low pressure region on splitter

SPLITTER DETAILS

1. A vortex is formed on the leading edge of splitter and moves out and rearward. This causes a large low pressure zone which creates downforce. The vortex lines can be seen on the LIC Plot. The vortex can also be seen in the Streamline Plot.

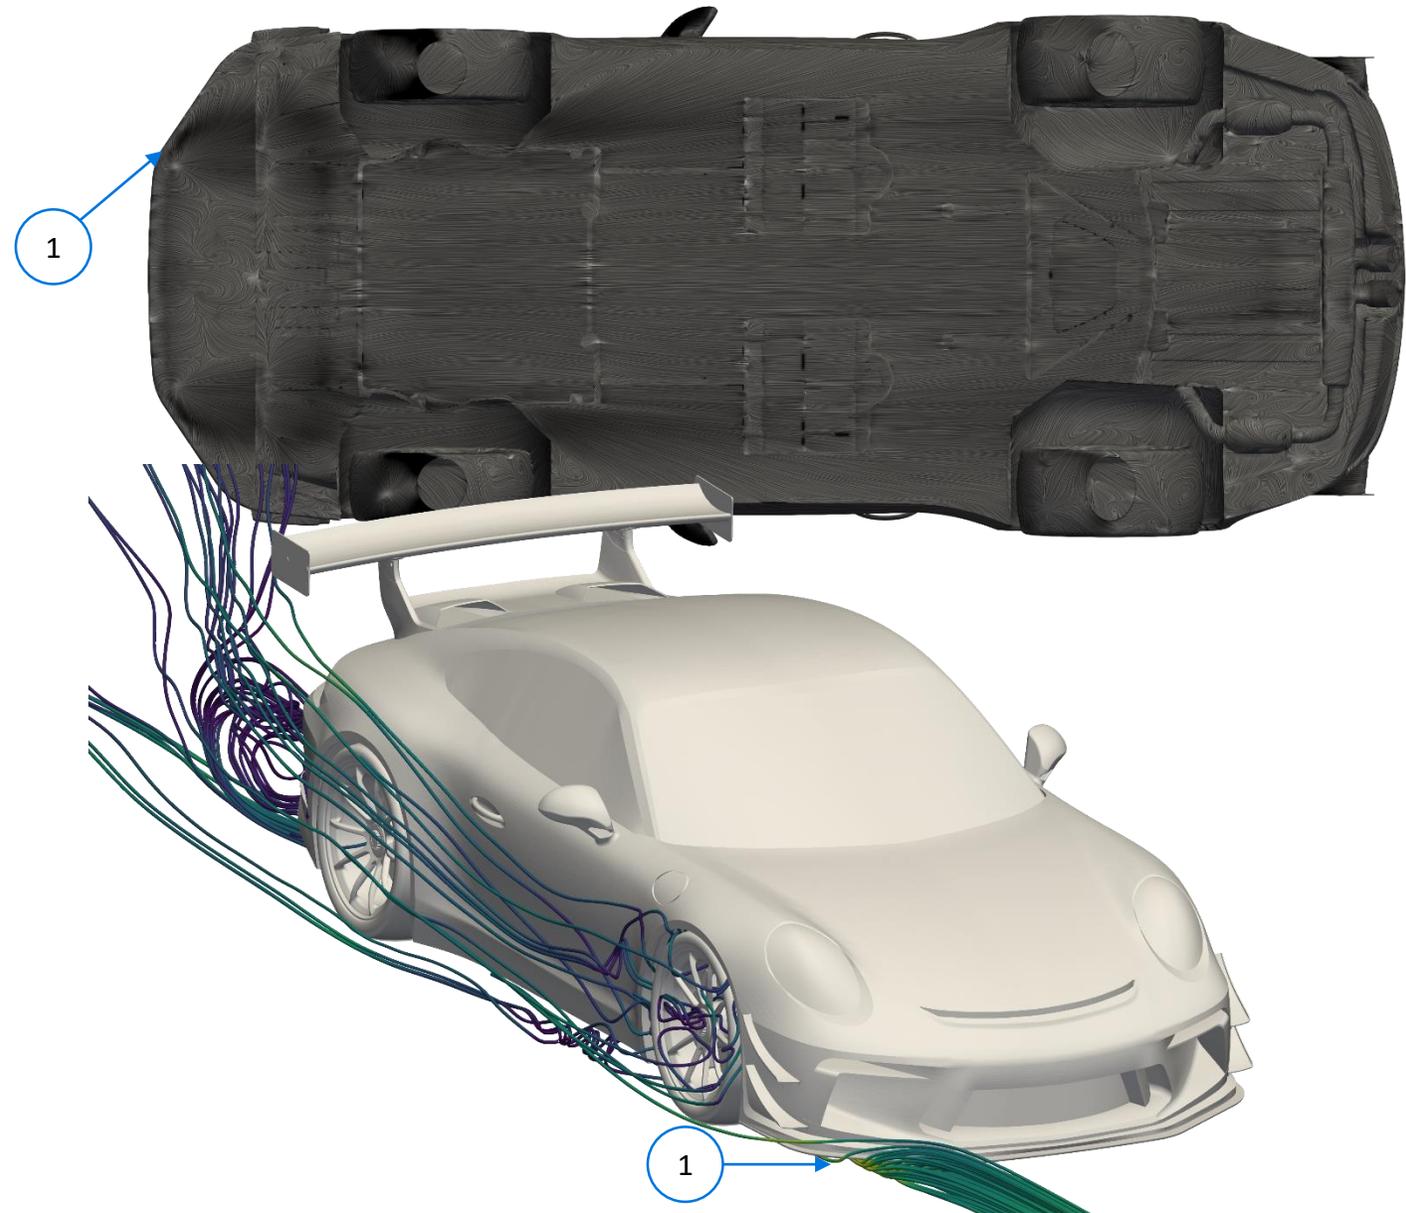

SUMMARY


The Verus Engineering Ventus Packages for the 991 Porsche GT3 are designed to decrease lap times utilizing well developed and functional aerodynamic components. These packages are designed to fit like OEM and increase the factory performance **all while keeping the factory warranty.** The research and development of the package was done using cutting edge technology in CFD and proven designs from previous work.








The individual components do not need to be installed as a package, but that will give the best performance for decreasing track times.

THE SCIENCE




This analysis was done using OpenFOAM V6 which is a finite volume CFD software. The solver was SIMPLE and the turbulence model was K-Omega SST using standard wall conditions. We use standard automotive arrangement when setting up boundary conditions and running a full-car. The case was simulated using slight yawed airflow of 0.5 degrees. This yawed airflow is to ensure we are not analyzing a condition the car will almost never see which is perfectly straight airflow down the length of the car.

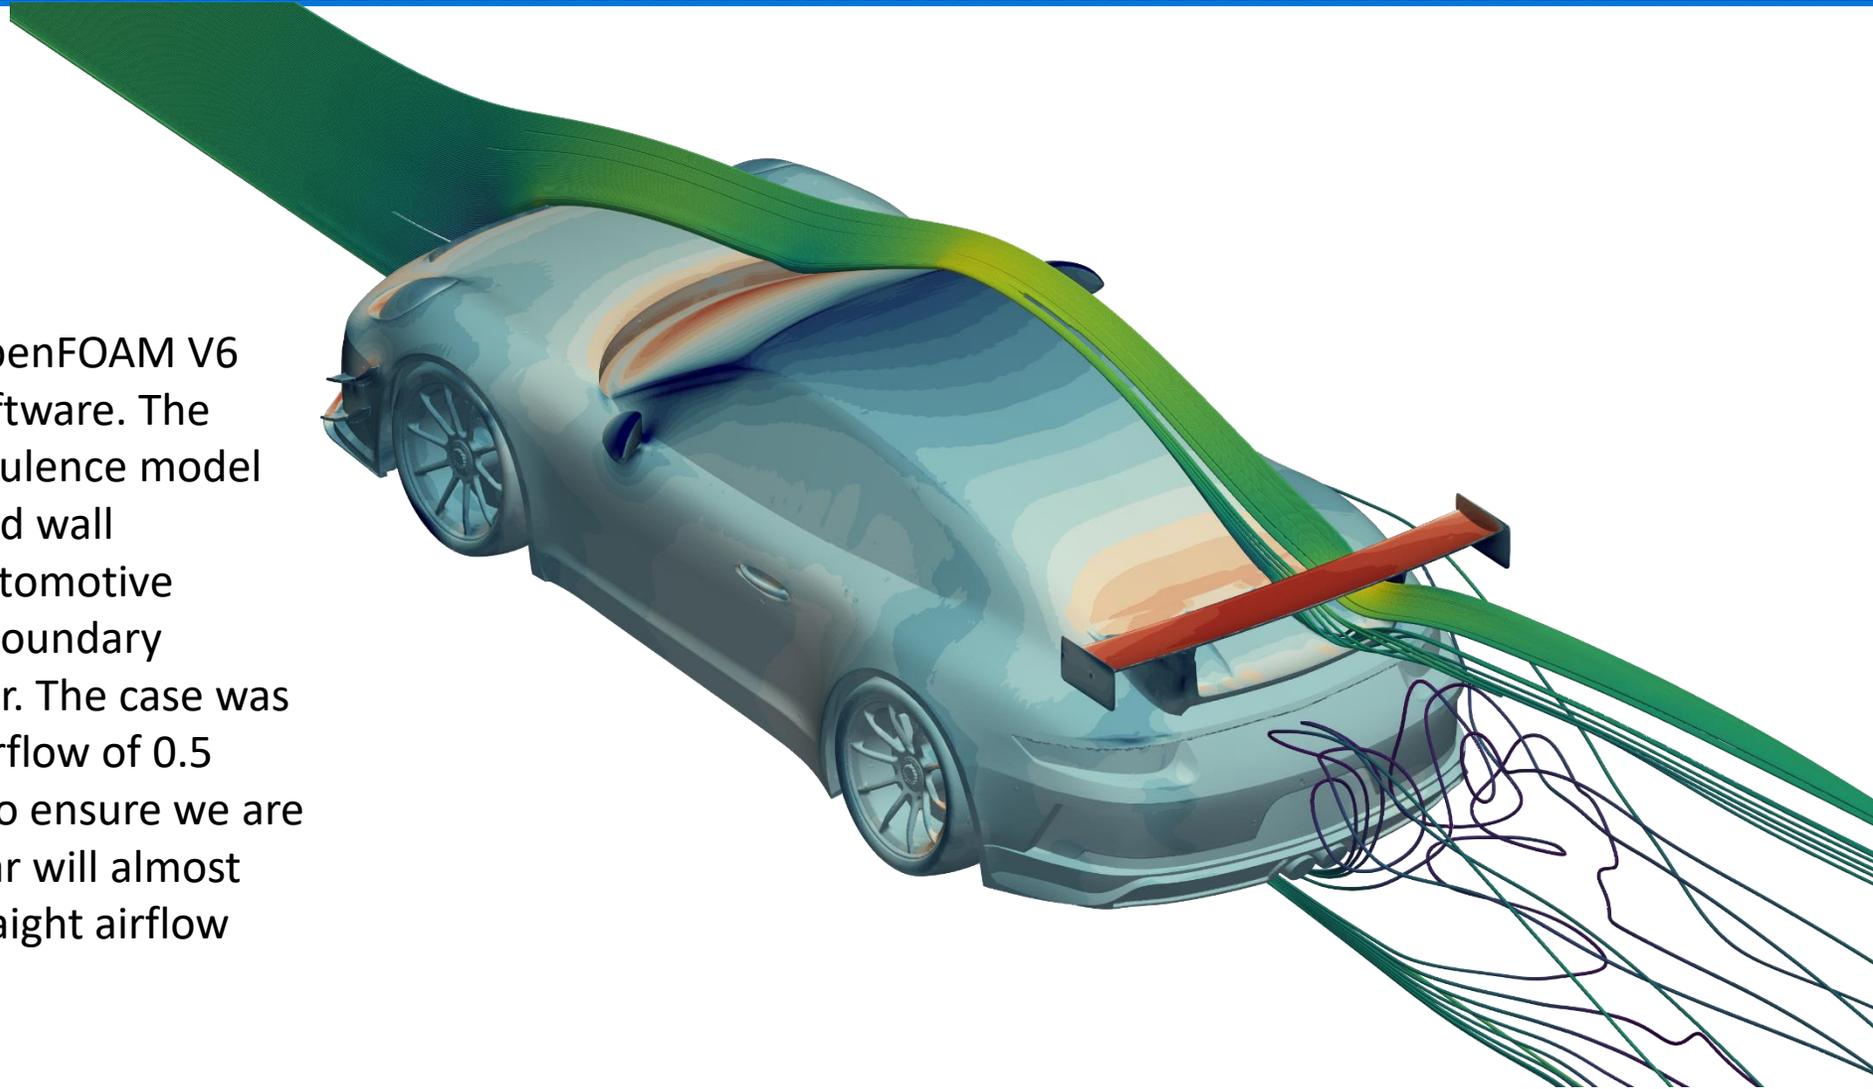

Cp PLOTS

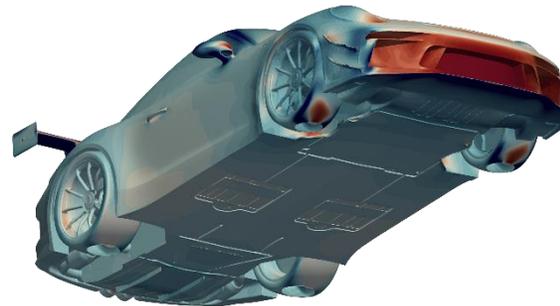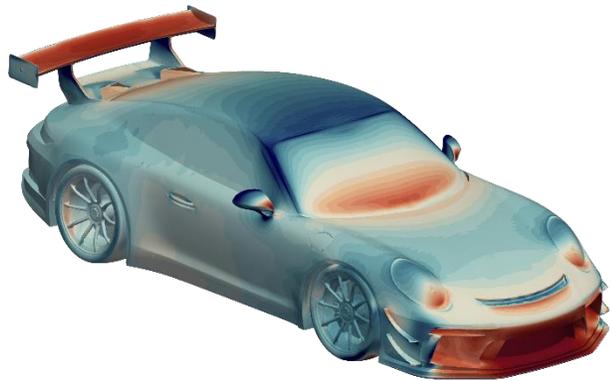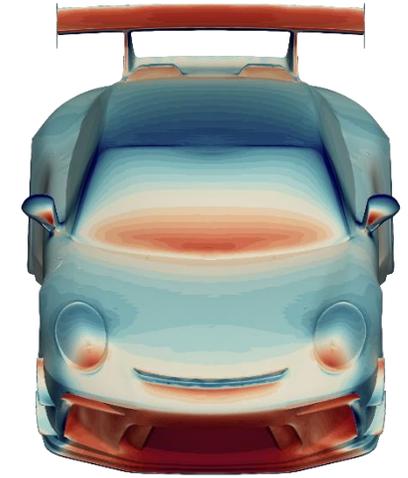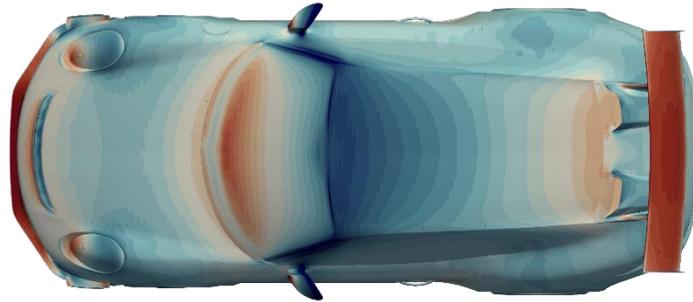

CpX PLOTS

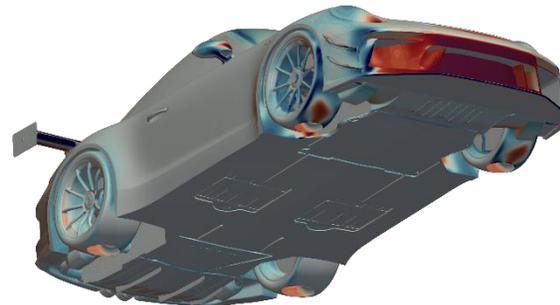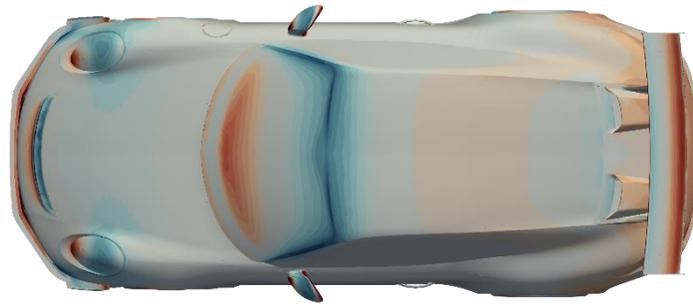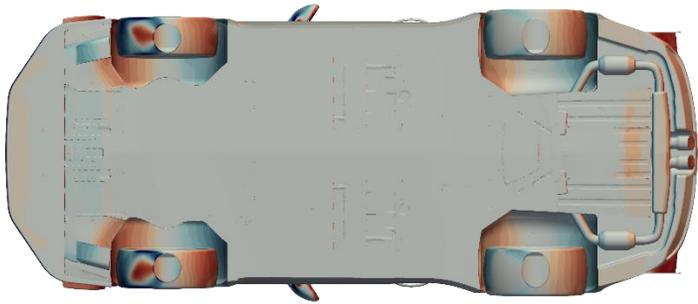

CpZ PLOTS

