

# ***BMW G87 M2 PLATFORM***

---

***PERFORMANCE OF VERUS ENGINEERING VENTUS PACKAGES***


# OVERVIEW

SUMMARY : AERODYNAMIC FORCES .....	pg. 3
VENTUS 1 PACKAGE .....	pg. 4
VENTUS 2 PACKAGE .....	pg. 5
DIVE PLANES / CANARDS .....	pg. 6
SPLITTER .....	pg. 7
SIDE SPLITTERS .....	pg. 8
UCW REAR WING .....	pg. 9
HOOD VENT / LOUVER .....	pg. 10
VORTEX GENERATORS .....	pg. 11
WIND DEFLECTORS .....	pg. 12
SUMMARY .....	pg. 13
QUALITY OF CAD MODEL .....	pg. 14
THE SCIENCE .....	pg. 15
DEFINITIONS .....	pg. 16




# SUMMARY : AERODYNAMIC FORCES

- Aerodynamic forces change with the square of the vehicle speed, which is why we use a graph.
- The Ventus 1 & 2 packages significantly increase downforce over stock with a comparatively minimal impact to drag and are a great choice for track enthusiasts and competitive racers alike.
- The Ventus 1 package uses the Verus Engineering Dive Planes, UCW Rear Wing, Vortex Generators, and we recommend the use of the Carbon Hood Louver to increase downforce and improve aero balance.
- The Ventus 2 package uses the Verus Engineering Dive Planes, UCW Rear Wing, Front Splitter (with End Plates), Side Splitters, Hood Louver, and Vortex Generators.
- The Wind Deflectors are a great addition to any M2
- Angle of Attack (AoA) adjustment allows the driver to fine tune aerodynamic balance to his or her preference.
- The thick diverging lines for Ventus 1 and 2 show how performance varies depending on setup.
  - Ventus 1 is shown from 0° AoA (no Hood Louver) to 5° AoA (with Hood Louver)
  - Ventus 2 is shown from 0° AoA to 12° AoA


## Verus Engineering Ventus Packages

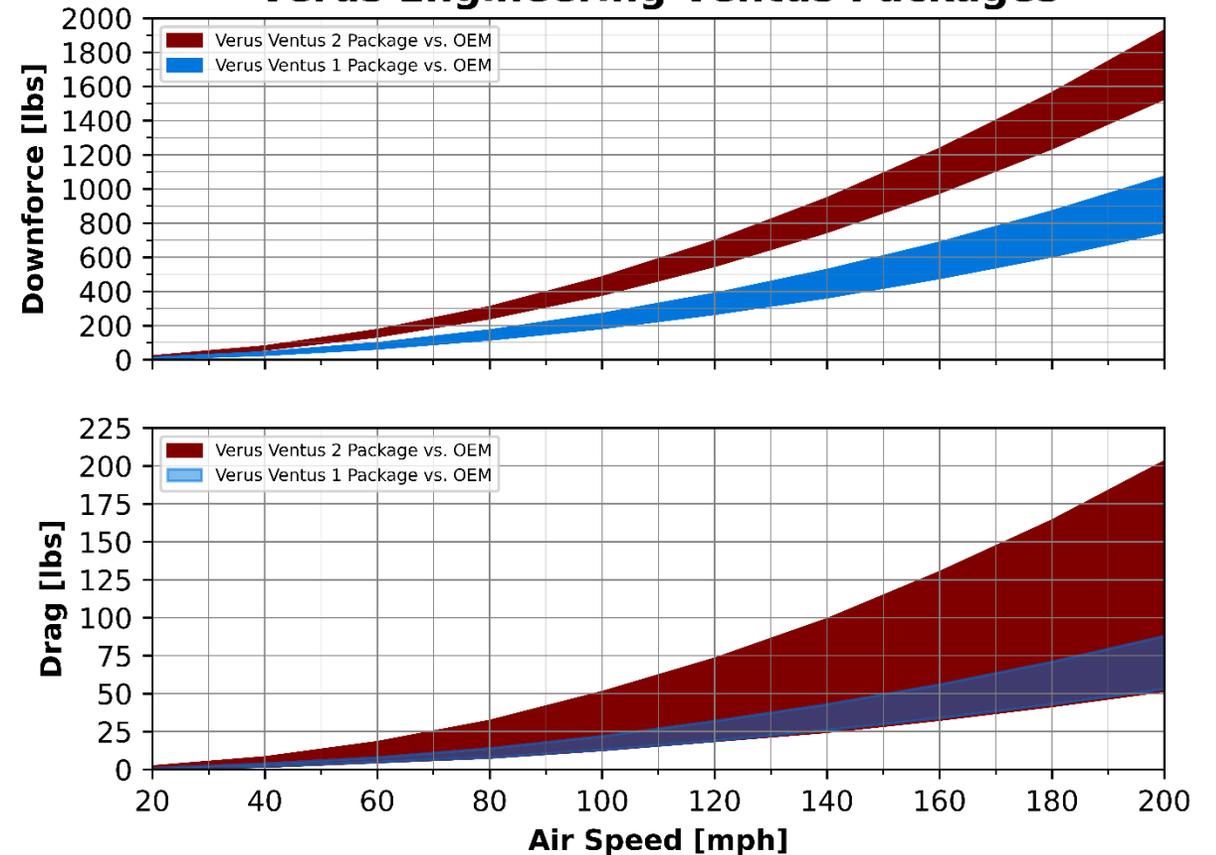

# VENTUS 1 PACKAGE

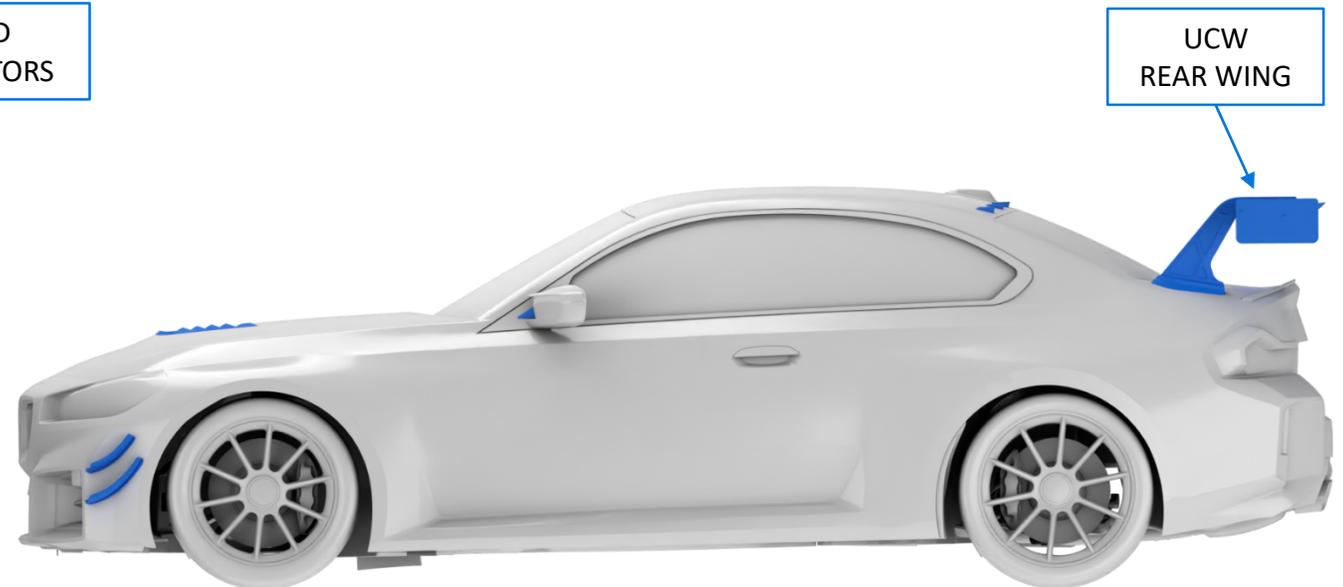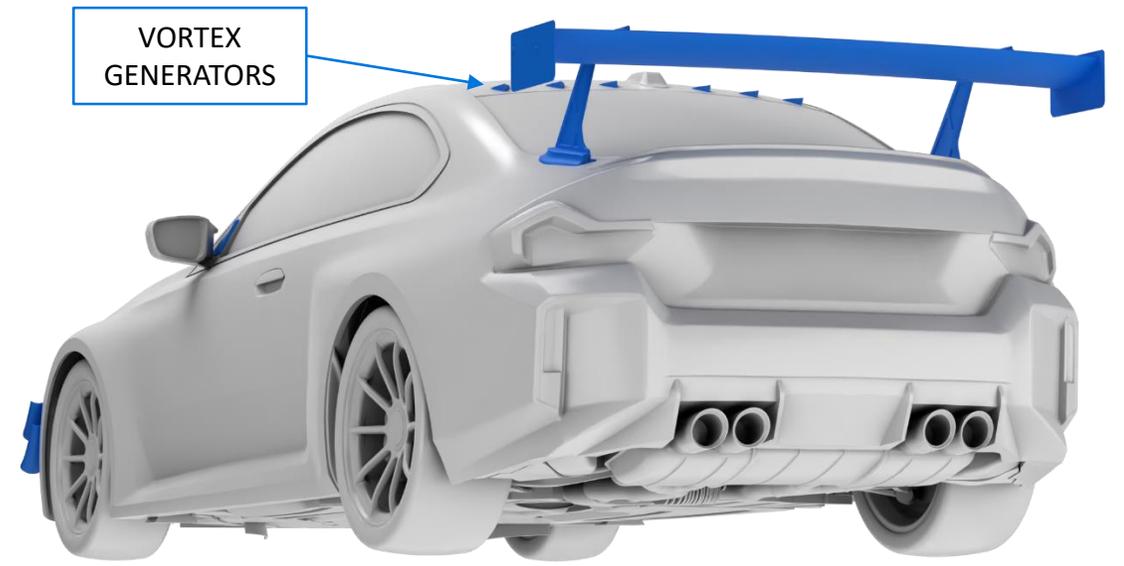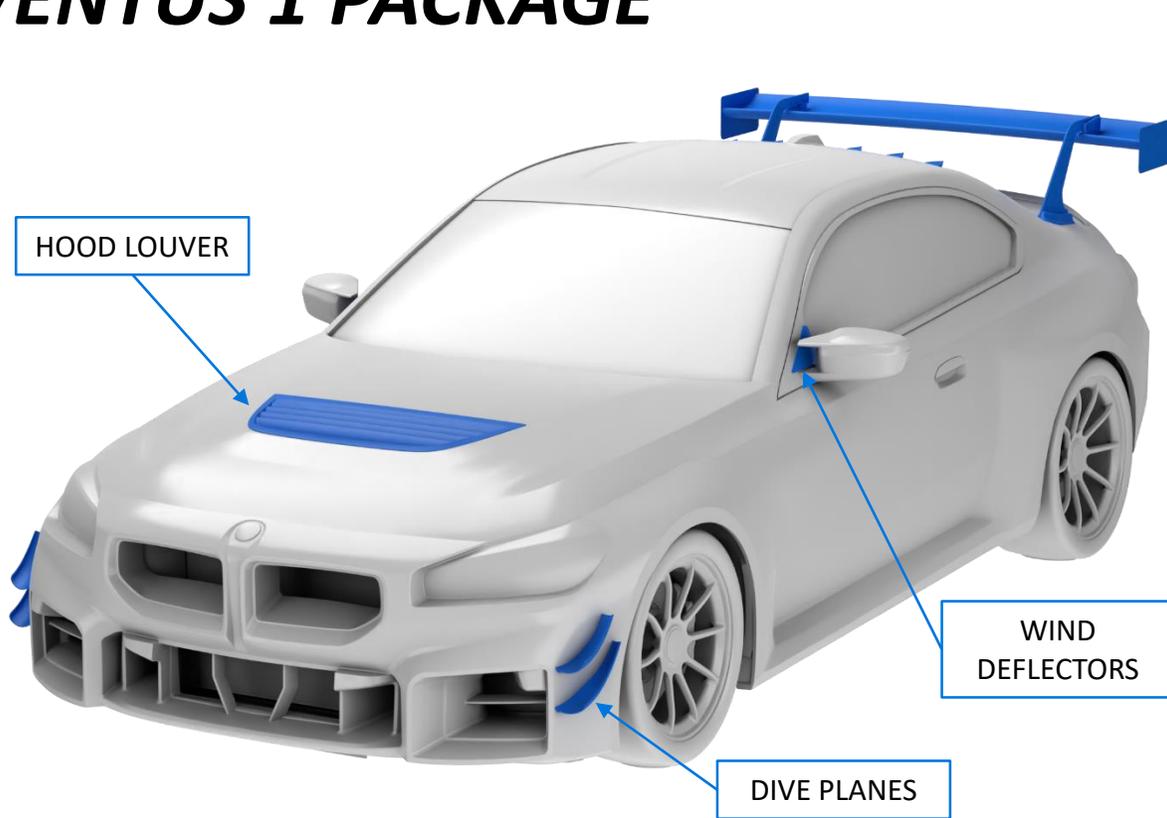


# VENTUS 2 PACKAGE

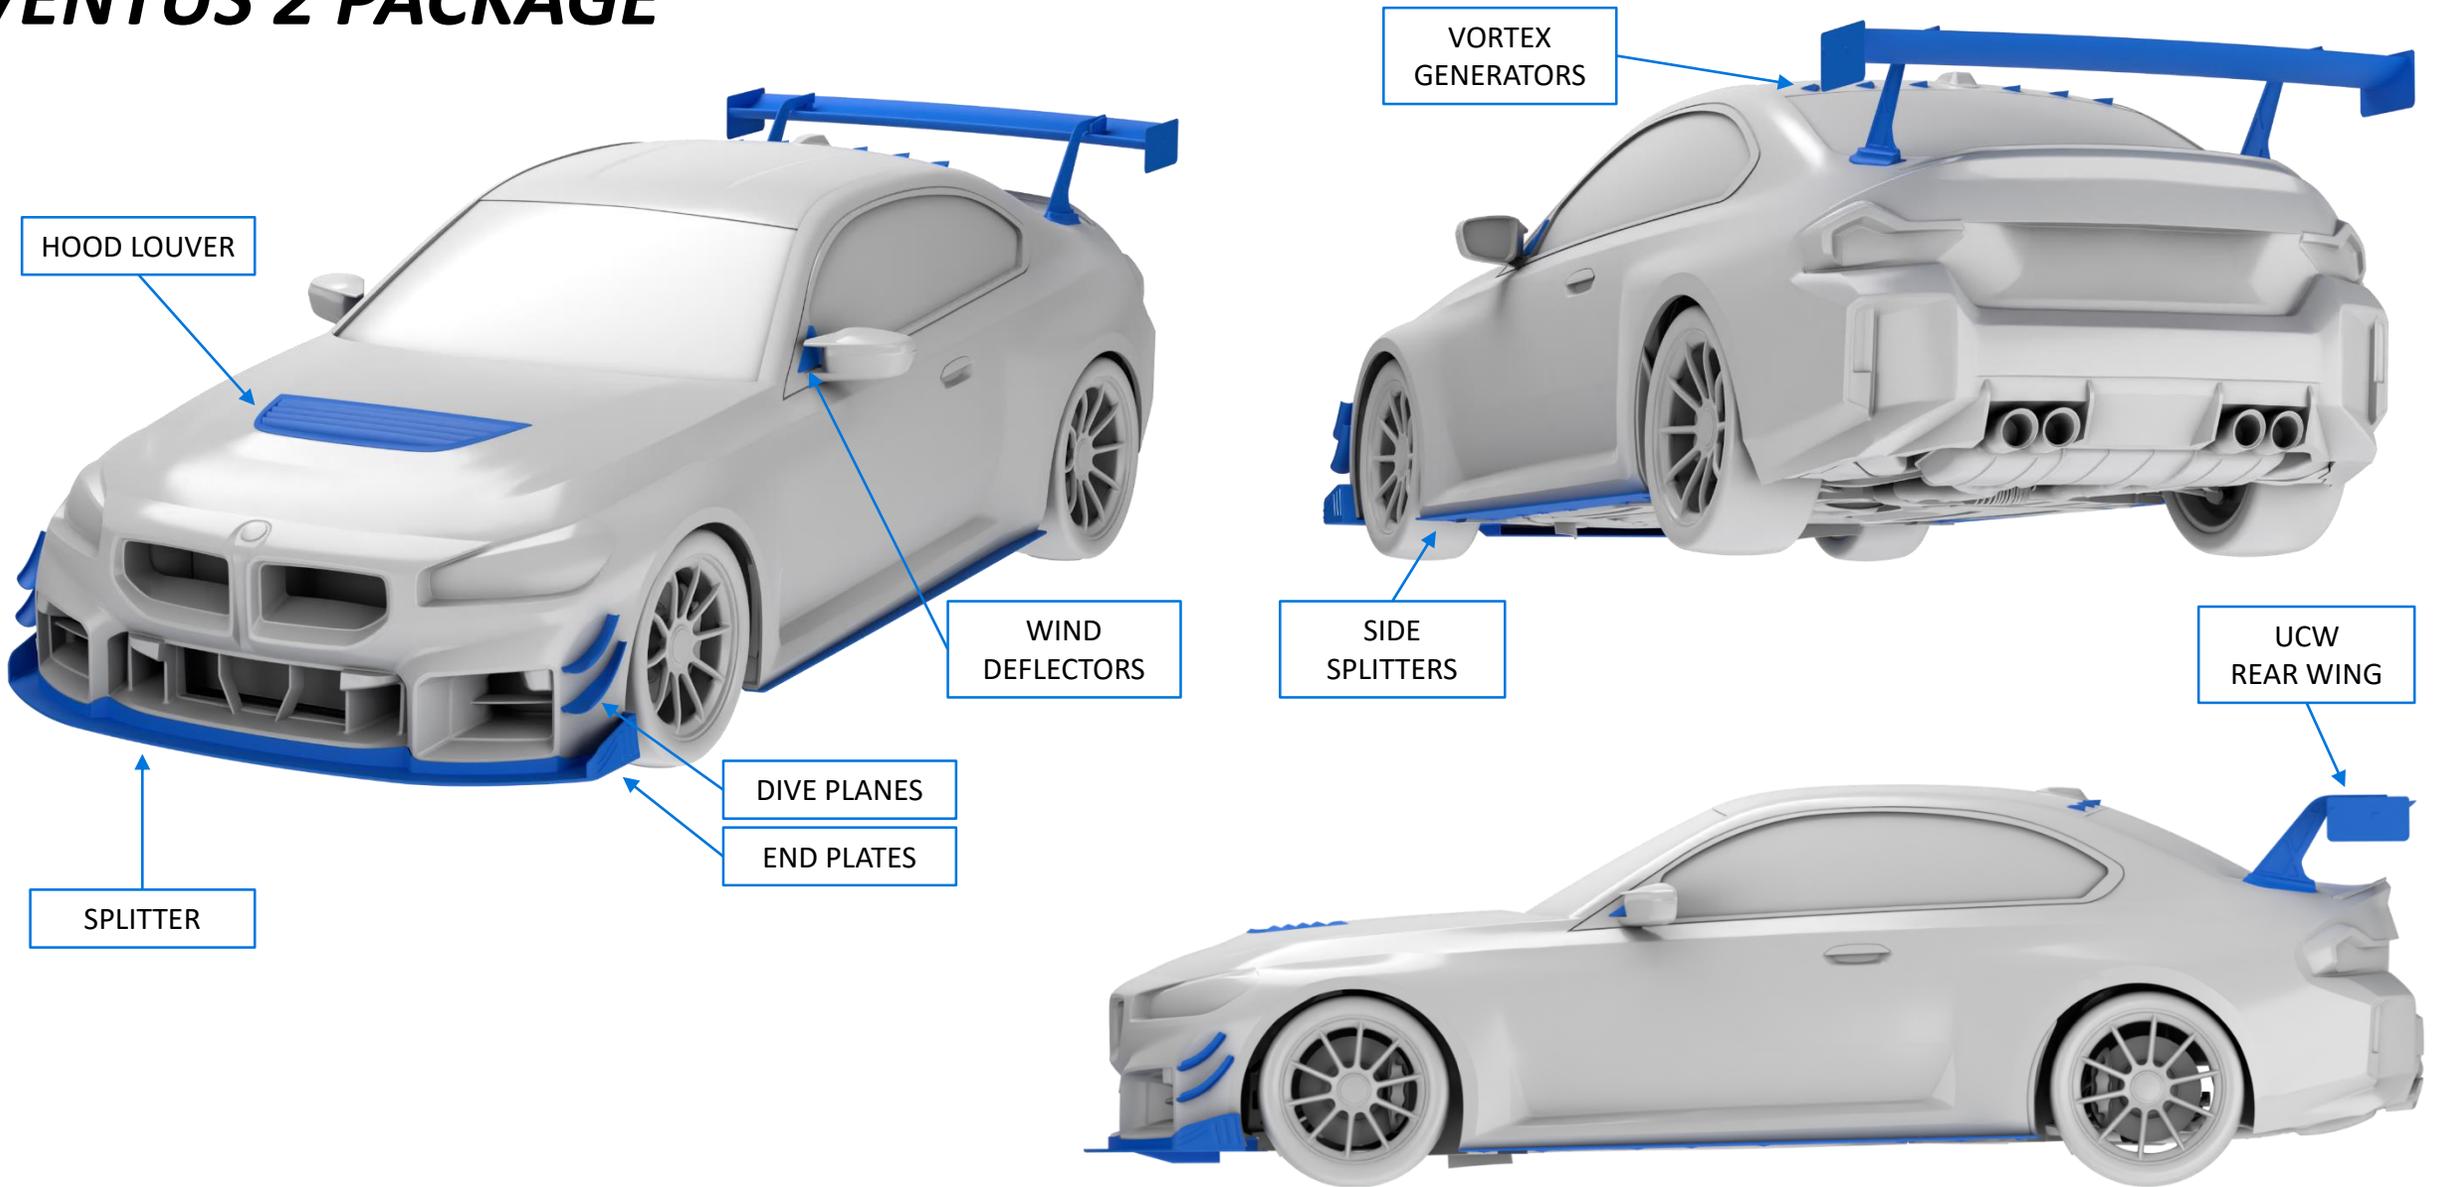





# DIVE PLANE / CANARDS

- Dive planes are great for customers looking for a slight bump in front downforce and no reduction in ground clearance.
- Verus Engineering develops dive planes to produce downforce by controlling the flow around the vehicle, not on the units themselves, improving efficacy.
- A small amount of downforce is produced on the units themselves, high pressure on top, low pressure on bottom.
- We develop the dive planes to create a beneficial vortex which helps evacuate the fenders.
- This evacuation reduces lift on the body, improving performance.
- The dive planes are produced from 2x2 twill carbon fiber finished in an automotive clear coat. Templates are supplied to ensure location of the units are correct.

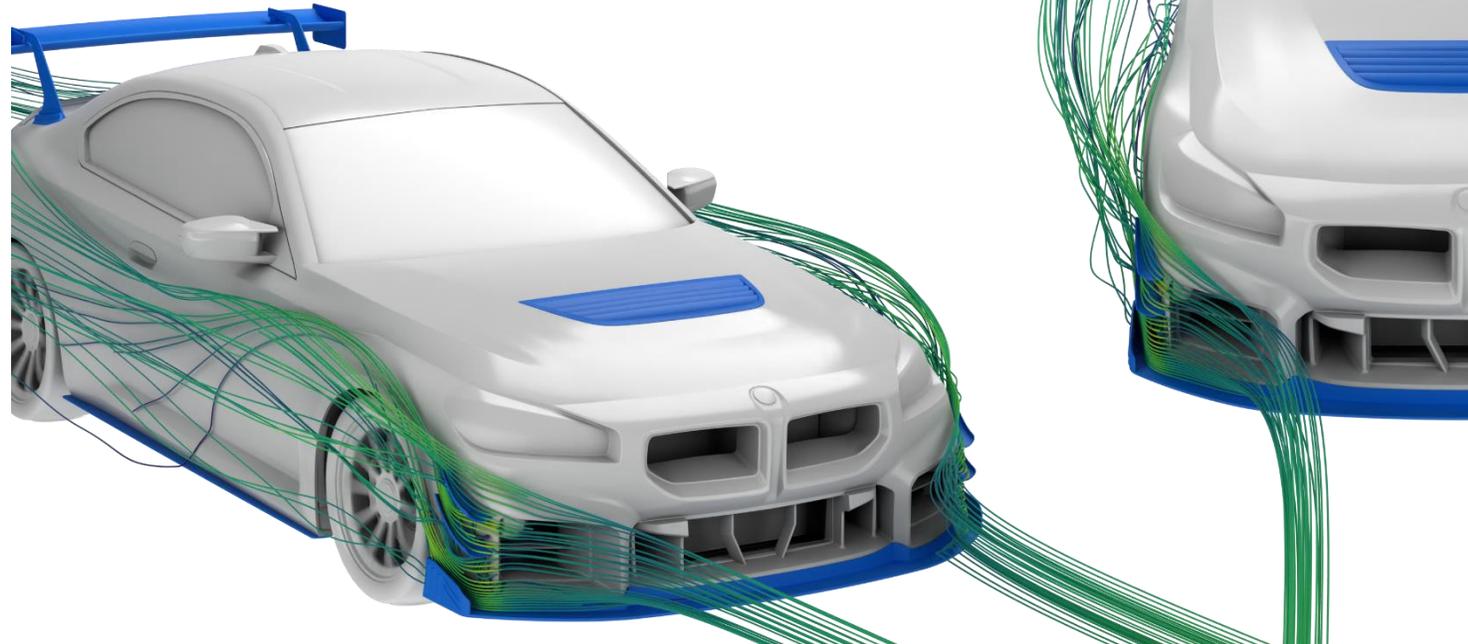

# SPLITTER

- The splitter is great for customers looking to generate significantly more front end downforce.
- The entire splitter assembly is modeled and simulated.
- Front splitters are very efficient aero devices.
- High pressure on the top side helps drive the splitter downward at speed.
- The bottom side, like the rear wing, produces more downforce than the top side.
- The Verus Engineering splitter includes a rearward facing duct to maintain flow through the downward facing oil cooler while reducing the impact on splitter performance. We recommend monitoring oil temperature during sustained high load driving, especially in hot climates (and especially if you plan to use the supplied block off plate to maximize splitter performance).
- Our splitter is a motorsports grade composite material. Carbon polyweave is rigid while exhibiting excellent wear characteristics. Where traditional carbon fiber components may fail due to an impact, the carbon polyweave will not.

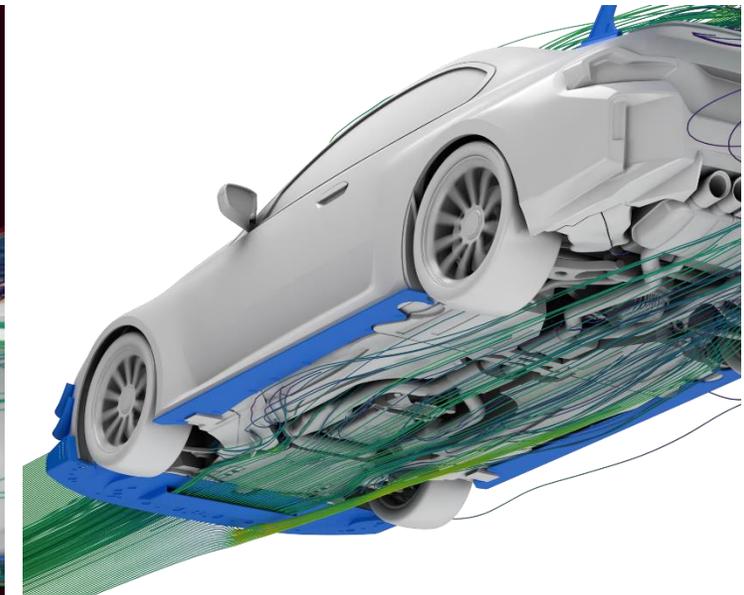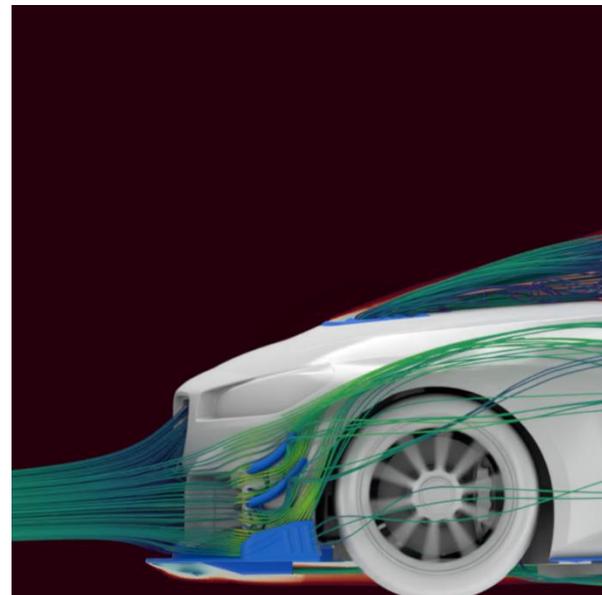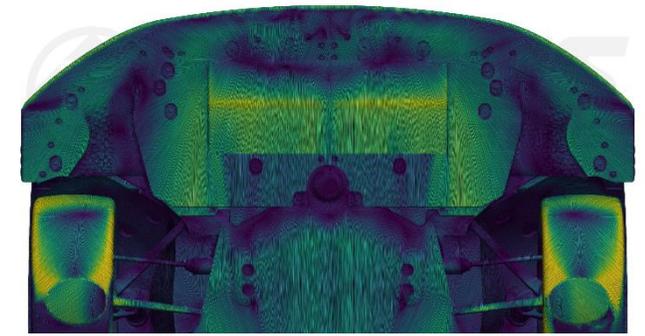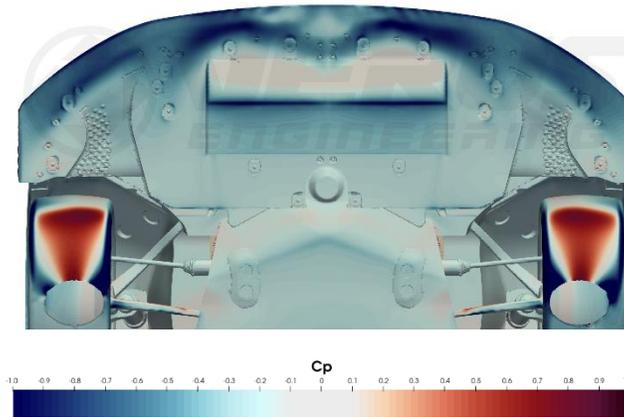


# SIDE SPLITTERS

- Side splitters reduce the amount of high pressure air from the top side of the vehicle making it under the vehicle.
- We focused on designing the units to clean up underbody airflow during turning or high yaw conditions.
- The increase in downforce is centrally located on the vehicle and the aero balance is minimally affected.
- Our side splitters are made with a motorsports grade composite material. Carbon polyweave is rigid while exhibiting excellent wear characteristics. Where traditional carbon fiber components may fail due to an impact, the carbon polyweave will not.
- The side splitters bolt to the vehicle using supplied hardware installed in the factory side skirt locations.




# UCW REAR WING

- The rear wing is great for customers looking for a large bump in rear downforce.
- The UCW wing profile was developed in CFD and refined in the wind tunnel.
- The airfoil produces substantial downforce on the G87 M2.
- The bottom surface is where the majority of the downforce is generated. This low pressure pulls the car downward.
- The top surface still produces downforce, but not like the bottom surface.
- The trunk mounts are machined from 6061 aluminum and have a lower surface matched to the contour of the OEM trunk lid. They sandwich the trunk lid with the hinge mounts using stainless steel standoffs to prevent trunk deformation. This makes for one of the most rigid UCW wing kits we've ever produced.
- The UCW is produced from 2x2 twill carbon fiber finished in an automotive clear coat.

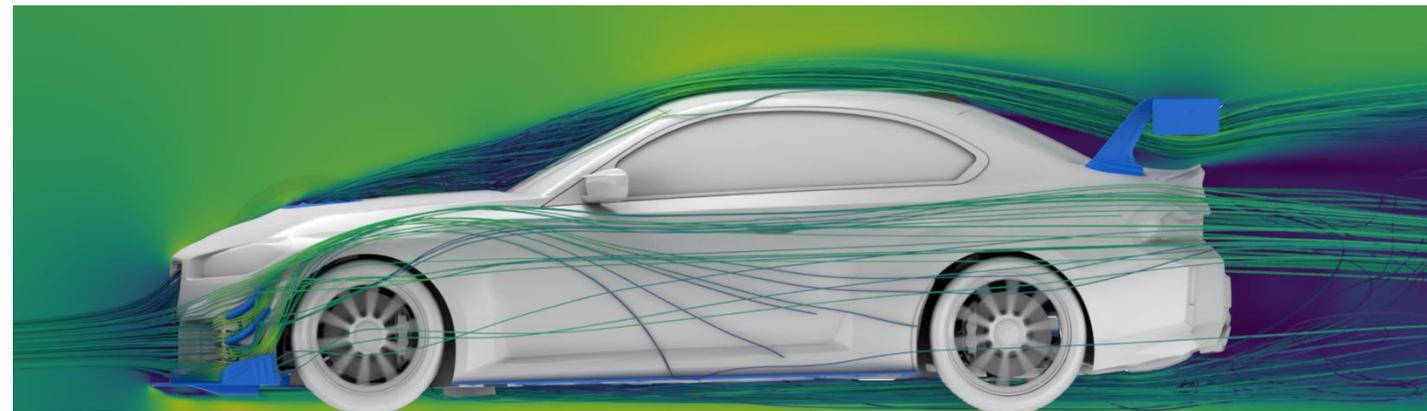



# HOOD VENT / LOUVER

- Reduces engine bay heat and pressure.
- The louver improves cooling stack efficiency and under hood component longevity.
- Adds a bump in the front end downforce by alleviating air pressure in the engine bay which significantly improves aero balance (27% Front to 42% Front with the UCW at 5° AoA)
- Developed using 3D scan data to have an OEM type fit and finish to the hood's contour.
- Placed in an area that removed **\*minimal\*** under hood structure and low pressure above the hood for maximum evacuation.
- Track testing shows the louvers to work very well on the car, dramatically reducing under hood temperatures.
- The hood louver is produced from 2x2 twill carbon fiber finished in an automotive clear coat. A template is supplied to ensure location of the unit is correct.

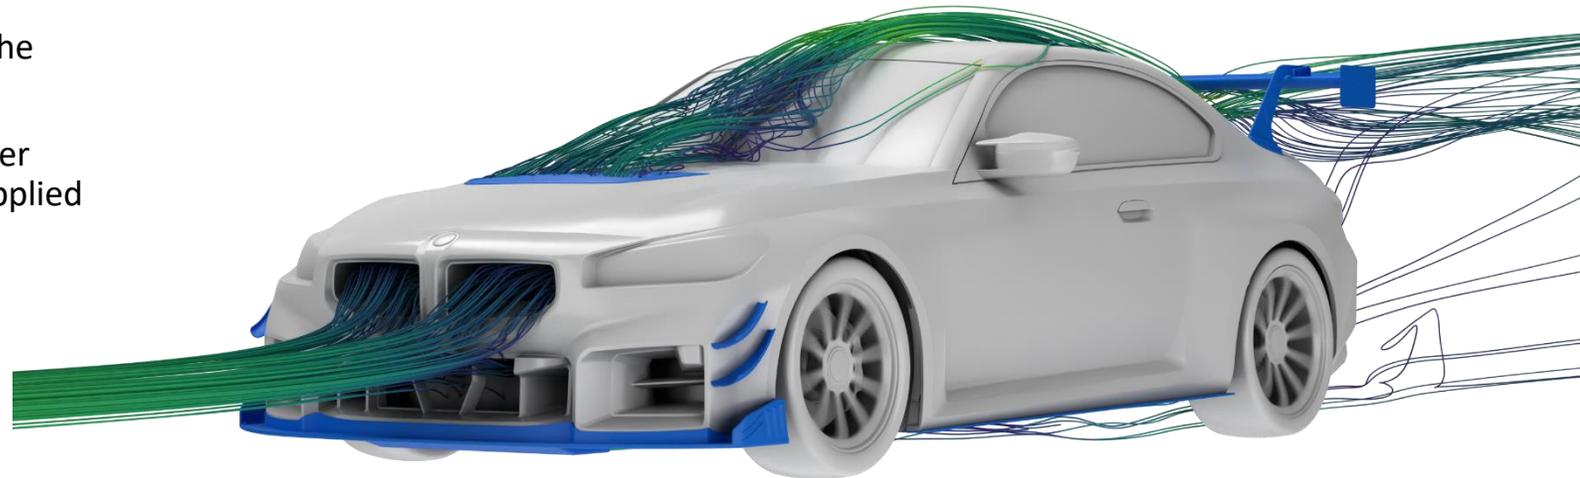

# VORTEX GENERATORS

- Significantly improve efficiency on Ventus 1 and Ventus 2 equipped G87 M2's.
- Due to the oil cooler on the G8X M platform Verus Engineering designed a large hood louver. The louver decreases drag as well as increased downforce and cooling stack efficiency. However, it also reduces attachment on the rear window and reduces rear wing efficiency.
- The Verus Engineering vortex generator package reattaches flow over the rear window and gains back rear wing efficiency. This means less drag and more downforce for a given wing setting.
- The Ventus 2 package at 5° AoA sees a drag reduction of 2% while increasing downforce by 5%.
- Further improvements can be made to total drag and balance by reducing the wing angle of attack to create the same total downforce as without the vortex generators.
- The VG's can be ordered in 2x2 twill carbon fiber, or 3D printed in a carbon fiber / nylon material.

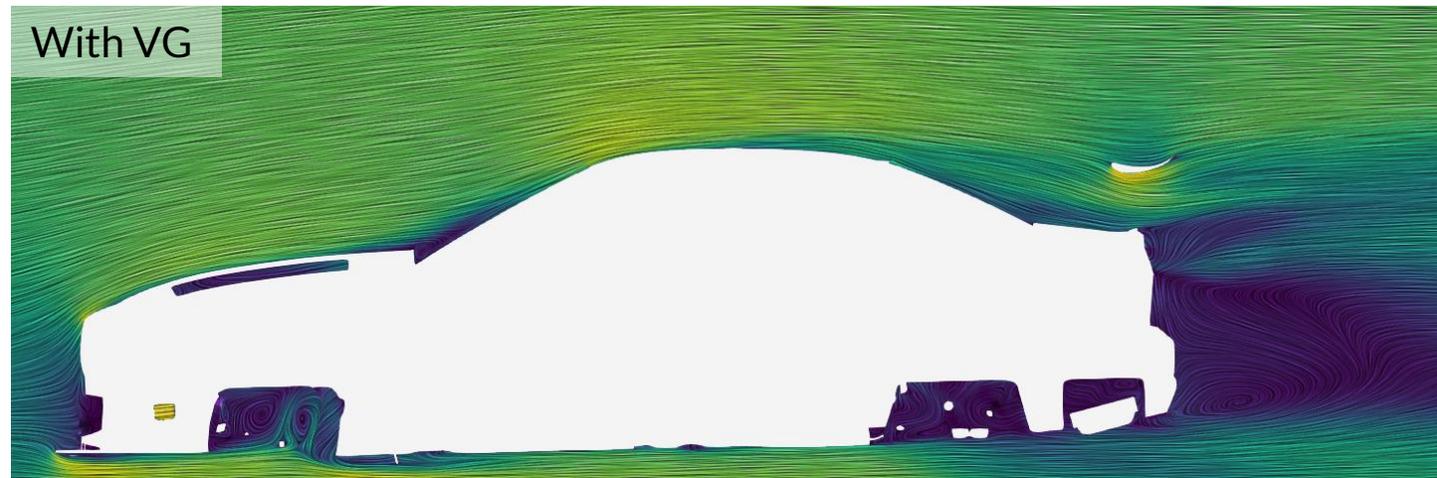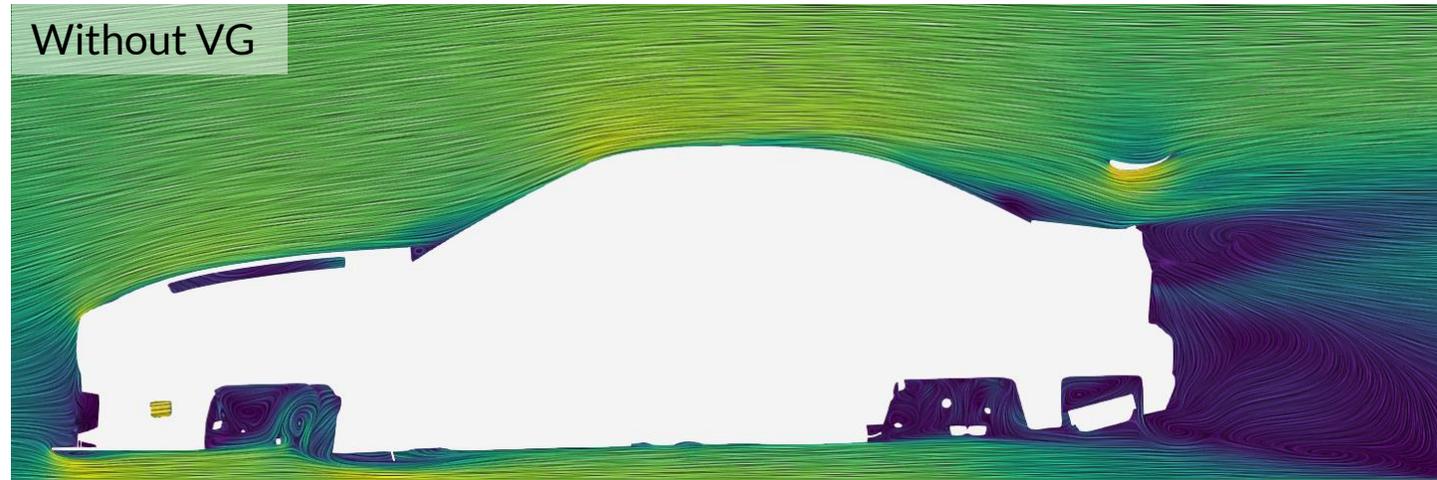


# WIND DEFLECTORS

- Wind buffeting is caused by pressure resonance that is unpleasant during driving with one or both windows down.
- The velocity cut plane to the right depicts the disrupted airflow upstream of the windows.
- The disrupted flow solves the wind buffeting issue that is prevalent on the G87 M2.
- The wind deflectors can be ordered in a 2x2 twill carbon fiber material 3D printed in carbon fiber/nylon.



NO WIND DEFLECTORS

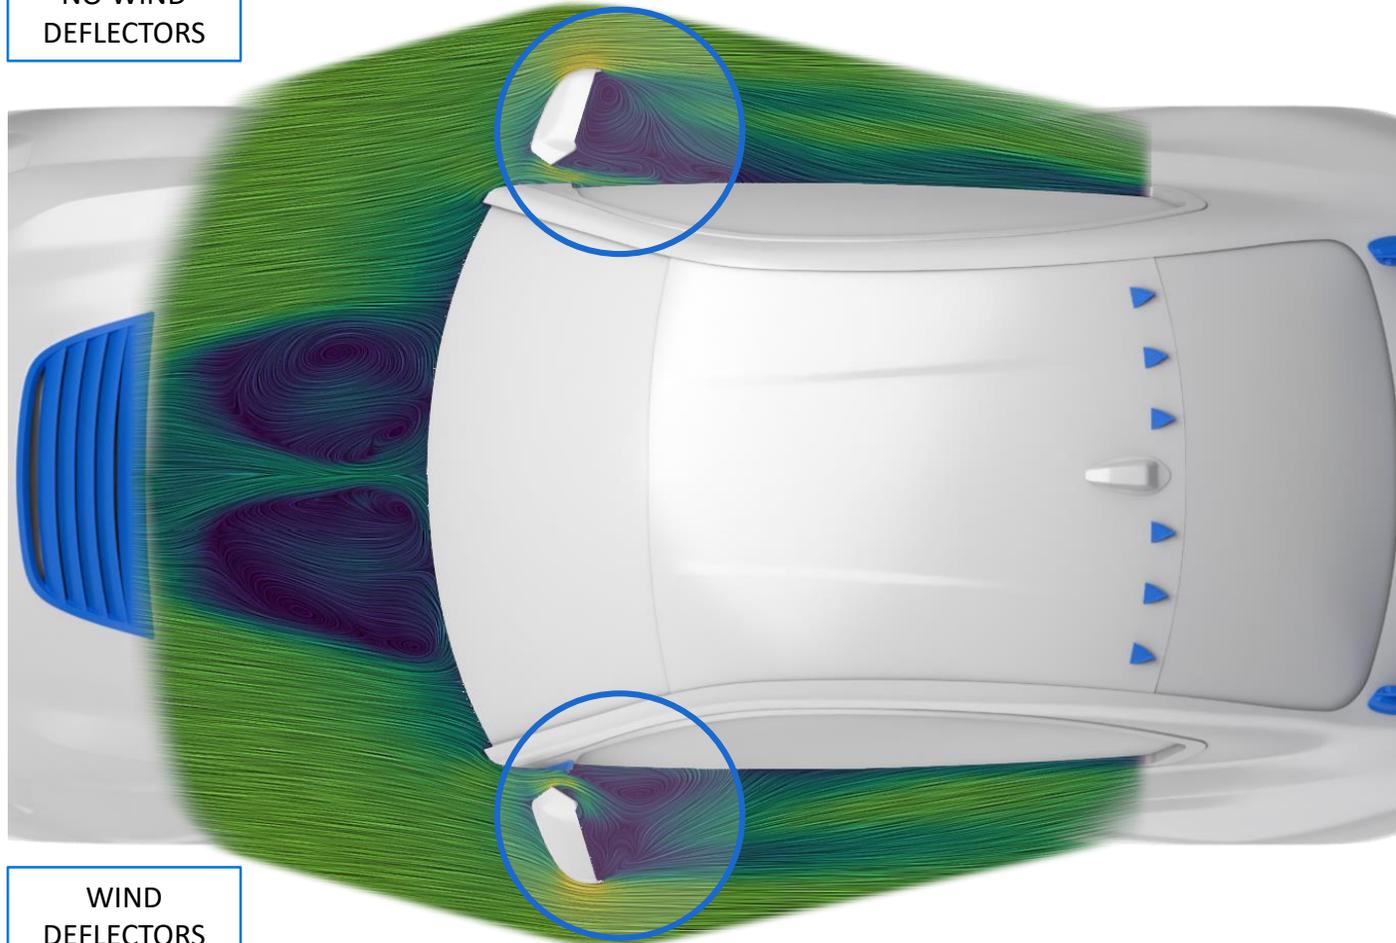

WIND DEFLECTORS


# SUMMARY

- The Verus Engineering Ventus Packages for the BMW G87 M2 Platform are designed to decrease lap times utilizing well developed and functional aerodynamic components.
- These packages are designed to fit like OEM and increase the factory performance all while keeping the factory warranty.
- The components increase vehicle performance.
- The R&D of the packages was done using cutting edge technology in CFD, knowledge gained through wind tunnel testing, track testing with professional driver, and proven designs from past work.
- The individual components can be installed without the full package, though to ensure a safe balance, we recommend the packages.



# QUALITY OF CAD MODEL


- The CAD model is a crucial aspect of accuracy.
- Bad inputs result in bad outputs.
- The CFD simulation is only as good as the geometry and setup of the CFD analysis.
- The M2 was scanned in house and a 3D CAD model was created from this scan.
- The image to the right shows the overlay of the CAD model (gray) and the scan (blue).
- The surfaces are less than 1mm off from the actual scan model in the “worst” locations, with most of the car being less than this.
- Through ducts and radiator ducting were modeled for improved analysis accuracy.

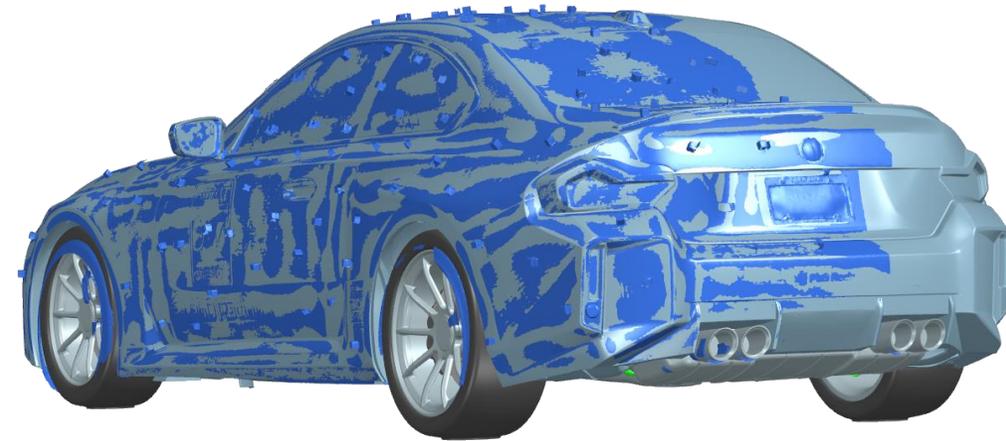

# THE SCIENCE

The development was done using OpenFOAM v2106 which is a finite volume CFD software. The solver was SIMPLE and the turbulence model was K-Omega SST using standard wall conditions. We use standard automotive arrangement when setting up boundary conditions and running a full-car. Most of the cases simulated used a slight yawed airflow of 0.5 degrees. This yawed airflow is to ensure we are not analyzing a condition the car will almost never see which is perfectly straight airflow down the length of the car. Other ride heights and yaw rates were also used to simulate cornering.

The use of porous flow was used for all the cooling stacks on the car. The darcy-forchheimer values used were based on past work of similar radiators/heat exchangers. All five coolers in the front were used for the porous flow.

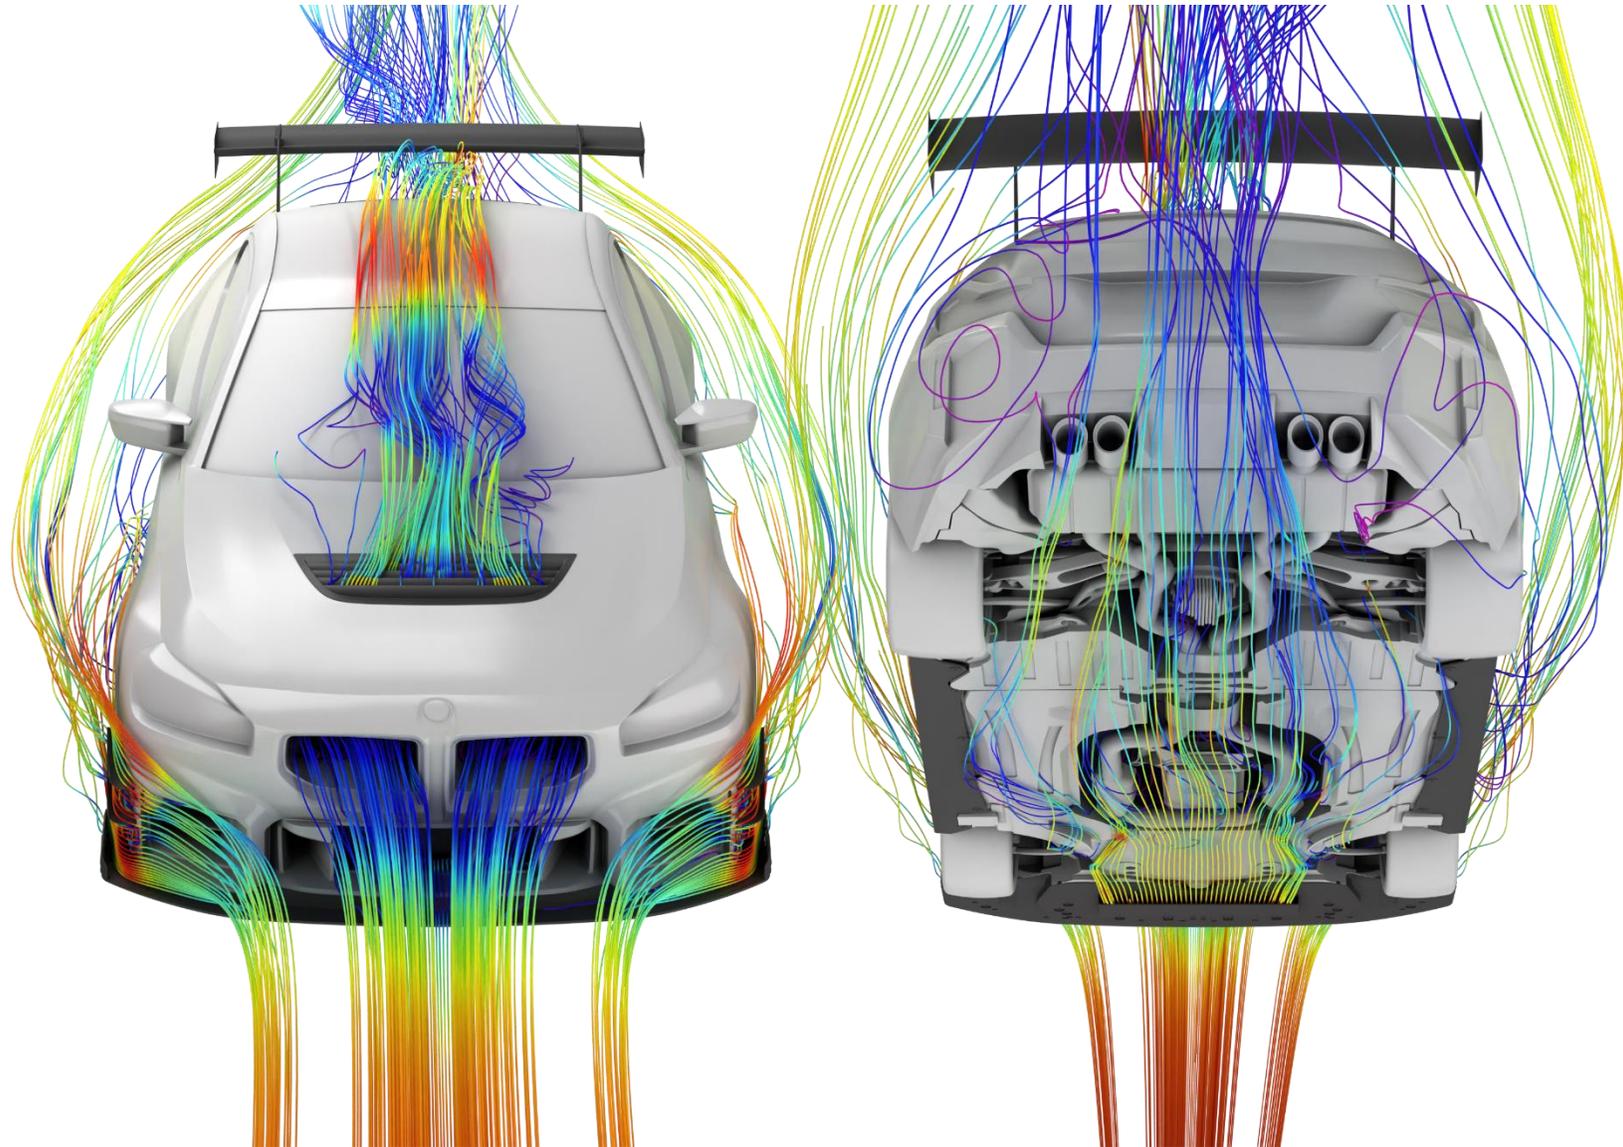

# DEFINITIONS

1. **Coefficient of Pressure (Cp)** = This is a dimensionless number which describes relative pressure to atmospheric pressure. A Cp of 0 equates to atmospheric pressure while a number below 0 represents low pressure and a number above 0 represents high pressure.
2. **CpX** = This is a dimensionless number which describes Cp normal to the x-direction. This helps us visualize locations which create drag. Red represents locations which are creating drag, while blue represents locations where thrust is created.
3. **CpZ** = This is a dimensionless number which describes Cp normal to the z-direction. This helps us visualize location which create downforce or lift. Red represents locations which are creating lift, while blue represents locations where downforce is created.
4. **Total Pressure Coefficient (CpT)** = This is a dimensionless number which describes total energy of the airstream. It is the sum of static pressure and dynamic pressure.
5. **Wall Shear** = This is a force per unit area due to fluid friction on the wall. This is used to visualize areas of separation and rapid changes on the surface.
6. **LIC Plot** = Line integral convolution (LIC) is used to visualize “oil” flow on the surface. It is a great way to correlate to flow vis testing and to study the flow on the surface of the vehicle.
7. **Streamline** = These are fluid tracers which are used to visualize where the air is going or coming from. These are normally colored as velocity where red is high-velocity and blue is low-velocity.
8. **Points** = One point is considered 0.001 of a coefficient. This is used in coefficient of drag (Cd) and coefficient of lift (Cl).