

# ***C8 CORVETTE – Z51/STINGRAY***

---

***PERFORMANCE OF VERUS ENGINEERING VENTUS PACKAGES***



# OVERVIEW

SUMMARY : AERODYNAMIC FORCES .....	pg. 3
VENTUS 1 PACKAGE .....	pg. 4
VENTUS 2 PACKAGE (BTM. MOUNT UCW) .....	pg. 5
VENTUS 2 PACKAGE (SWAN NECK UCW) .....	pg. 6
VENTUS 3 PACKAGE .....	pg. 7
DIVE PLANES / CANARDS .....	pg. 8
DIFFUSER (ALUMINUM) .....	pg. 9
DIFFUSER (CARBON) .....	pg. 10
SPLITTER .....	pg. 11
SIDE SPLITTERS .....	pg. 12
UCW REAR WING (BTM. MOUNT) .....	pg. 13
UCW REAR WING (SWAN NECK) .....	pg. 14
V1X REAR WING .....	pg. 15
SUMMARY : UCW & V1X REAR WINGS .....	pg. 16
DUCKTAIL SPOILER .....	pg. 17
BRAKE DUCT BLOCK-OFF .....	pg. 18
SUMMARY .....	pg. 19
QUALITY OF CAD MODEL .....	pg. 20
THE SCIENCE .....	pg. 21
DEFINITIONS .....	pg. 22


# SUMMARY : AERODYNAMIC FORCES

- Aerodynamic forces change with the square of the vehicle speed, which is why we use a graph.
- The Ventus packages significantly increase downforce over stock with a comparatively minimal impact to drag and are a great choice for track enthusiasts and competitive racers alike.
- The Ventus 1 package uses the Verus Engineering Dive Planes and your choice of Aluminum Rear Diffuser with Polyweave Spats, or our Carbon Diffuser. The Carbon Diffuser produces slightly more downforce than the Aluminum Diffuser. This is illustrated by the slightly diverging grey lines on the graph to the right.
- The Ventus 2 packages add the, Front Splitter, Side Splitters, Ducktail Spoiler & Btm. Mount or Swan Neck UCW's. Either the Aluminum or Carbon Air Dam can be selected.
- The Ventus 3 package adds the Front Splitter End Plates and V1X rear wing.
- Angle of Attack (AoA) adjustment allows the driver to fine tune aerodynamic balance to his or her preference.
- The thick diverging lines for Ventus 1, 2, & 3 show performance/balance variations depending on setup.
  - Ventus 2 is shown from 0° AoA to 12° AoA with the UCW
  - Ventus 3 is shown from 1.9° AoA to 10° AoA with the V1X
  - The V1X at 1.9° produces 2% more downforce than the UCW at 12° with 5% less drag.



## Verus Engineering Ventus Packages

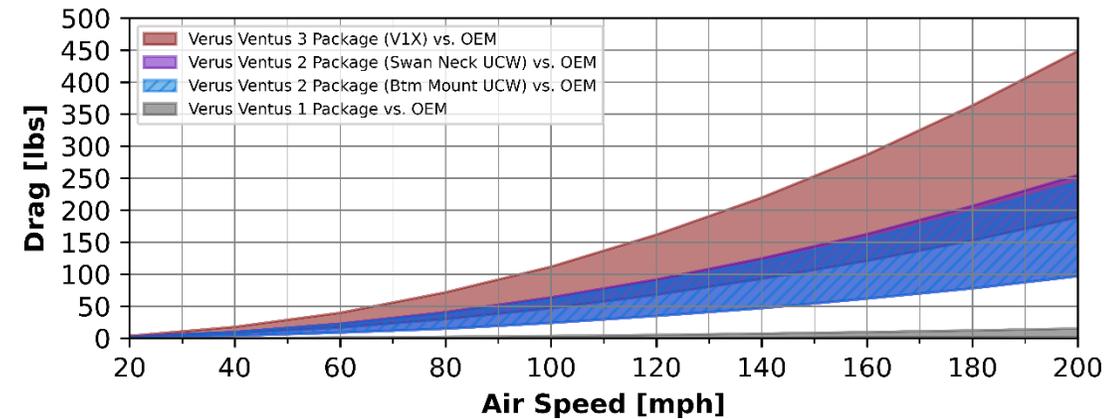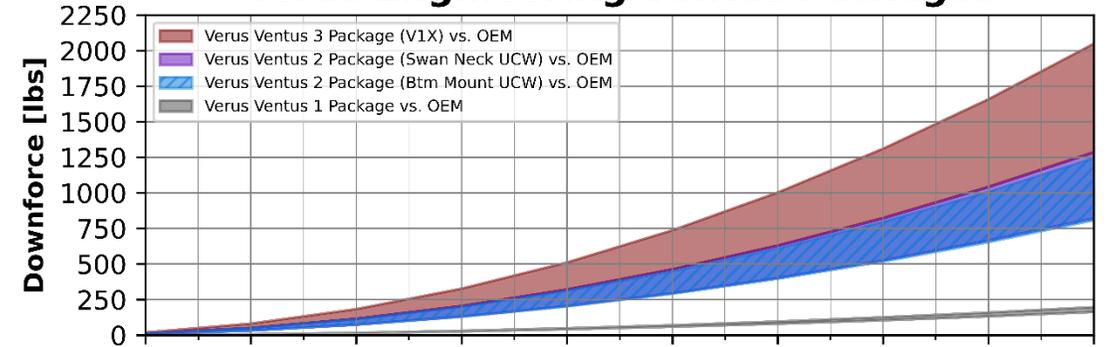


Aero Balance - Percent Front vs. Rear (Ventus Packages)

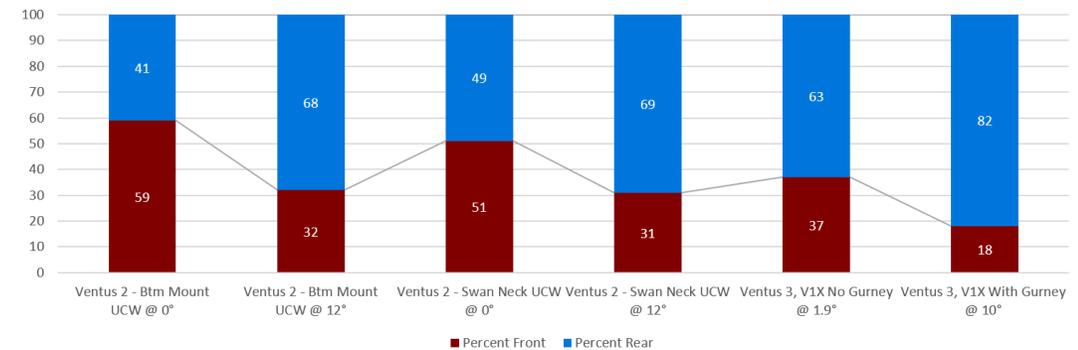


# VENTUS 1 PACKAGE

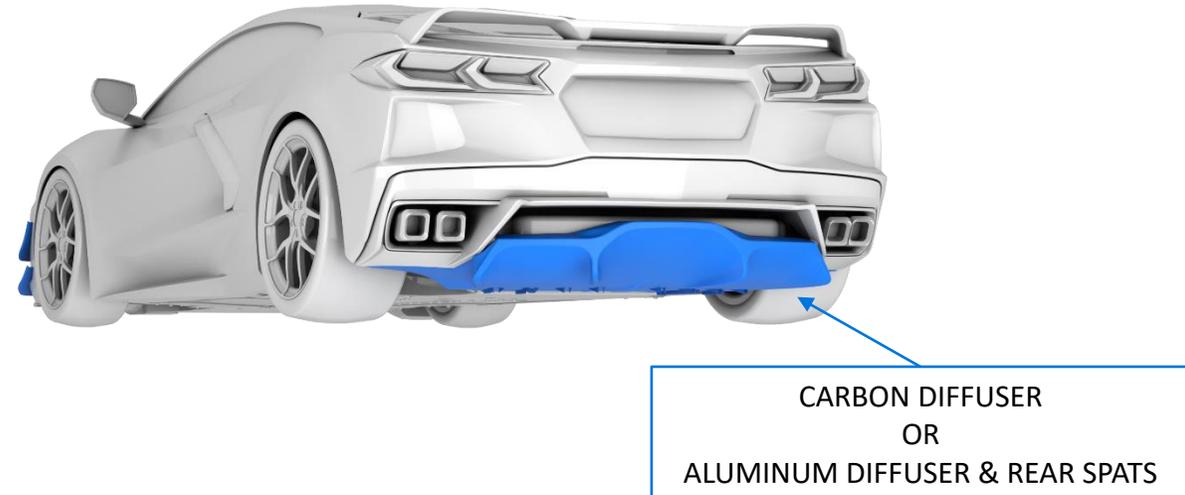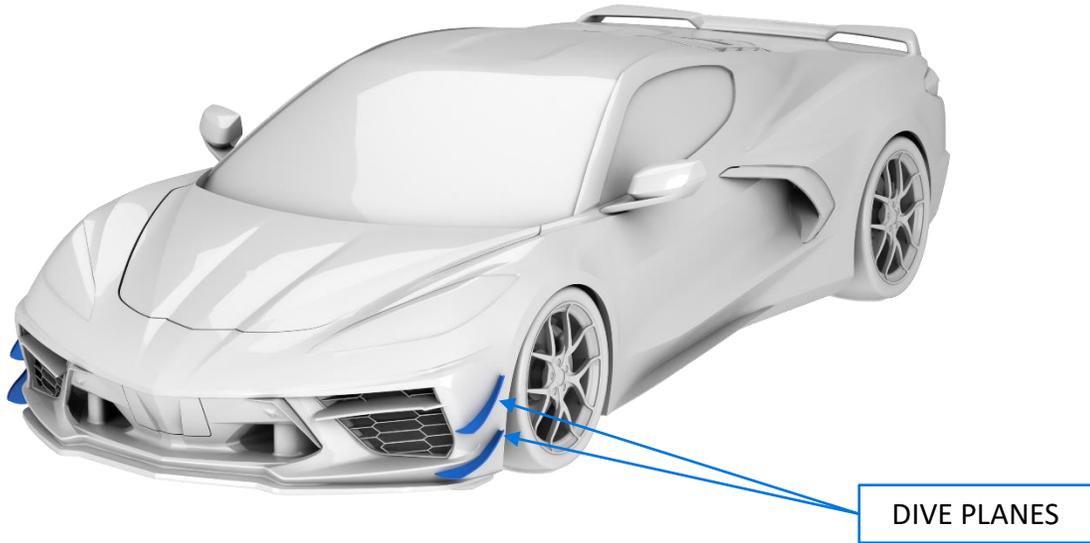

# VENTUS 2 PACKAGE (BTM. MOUNT)

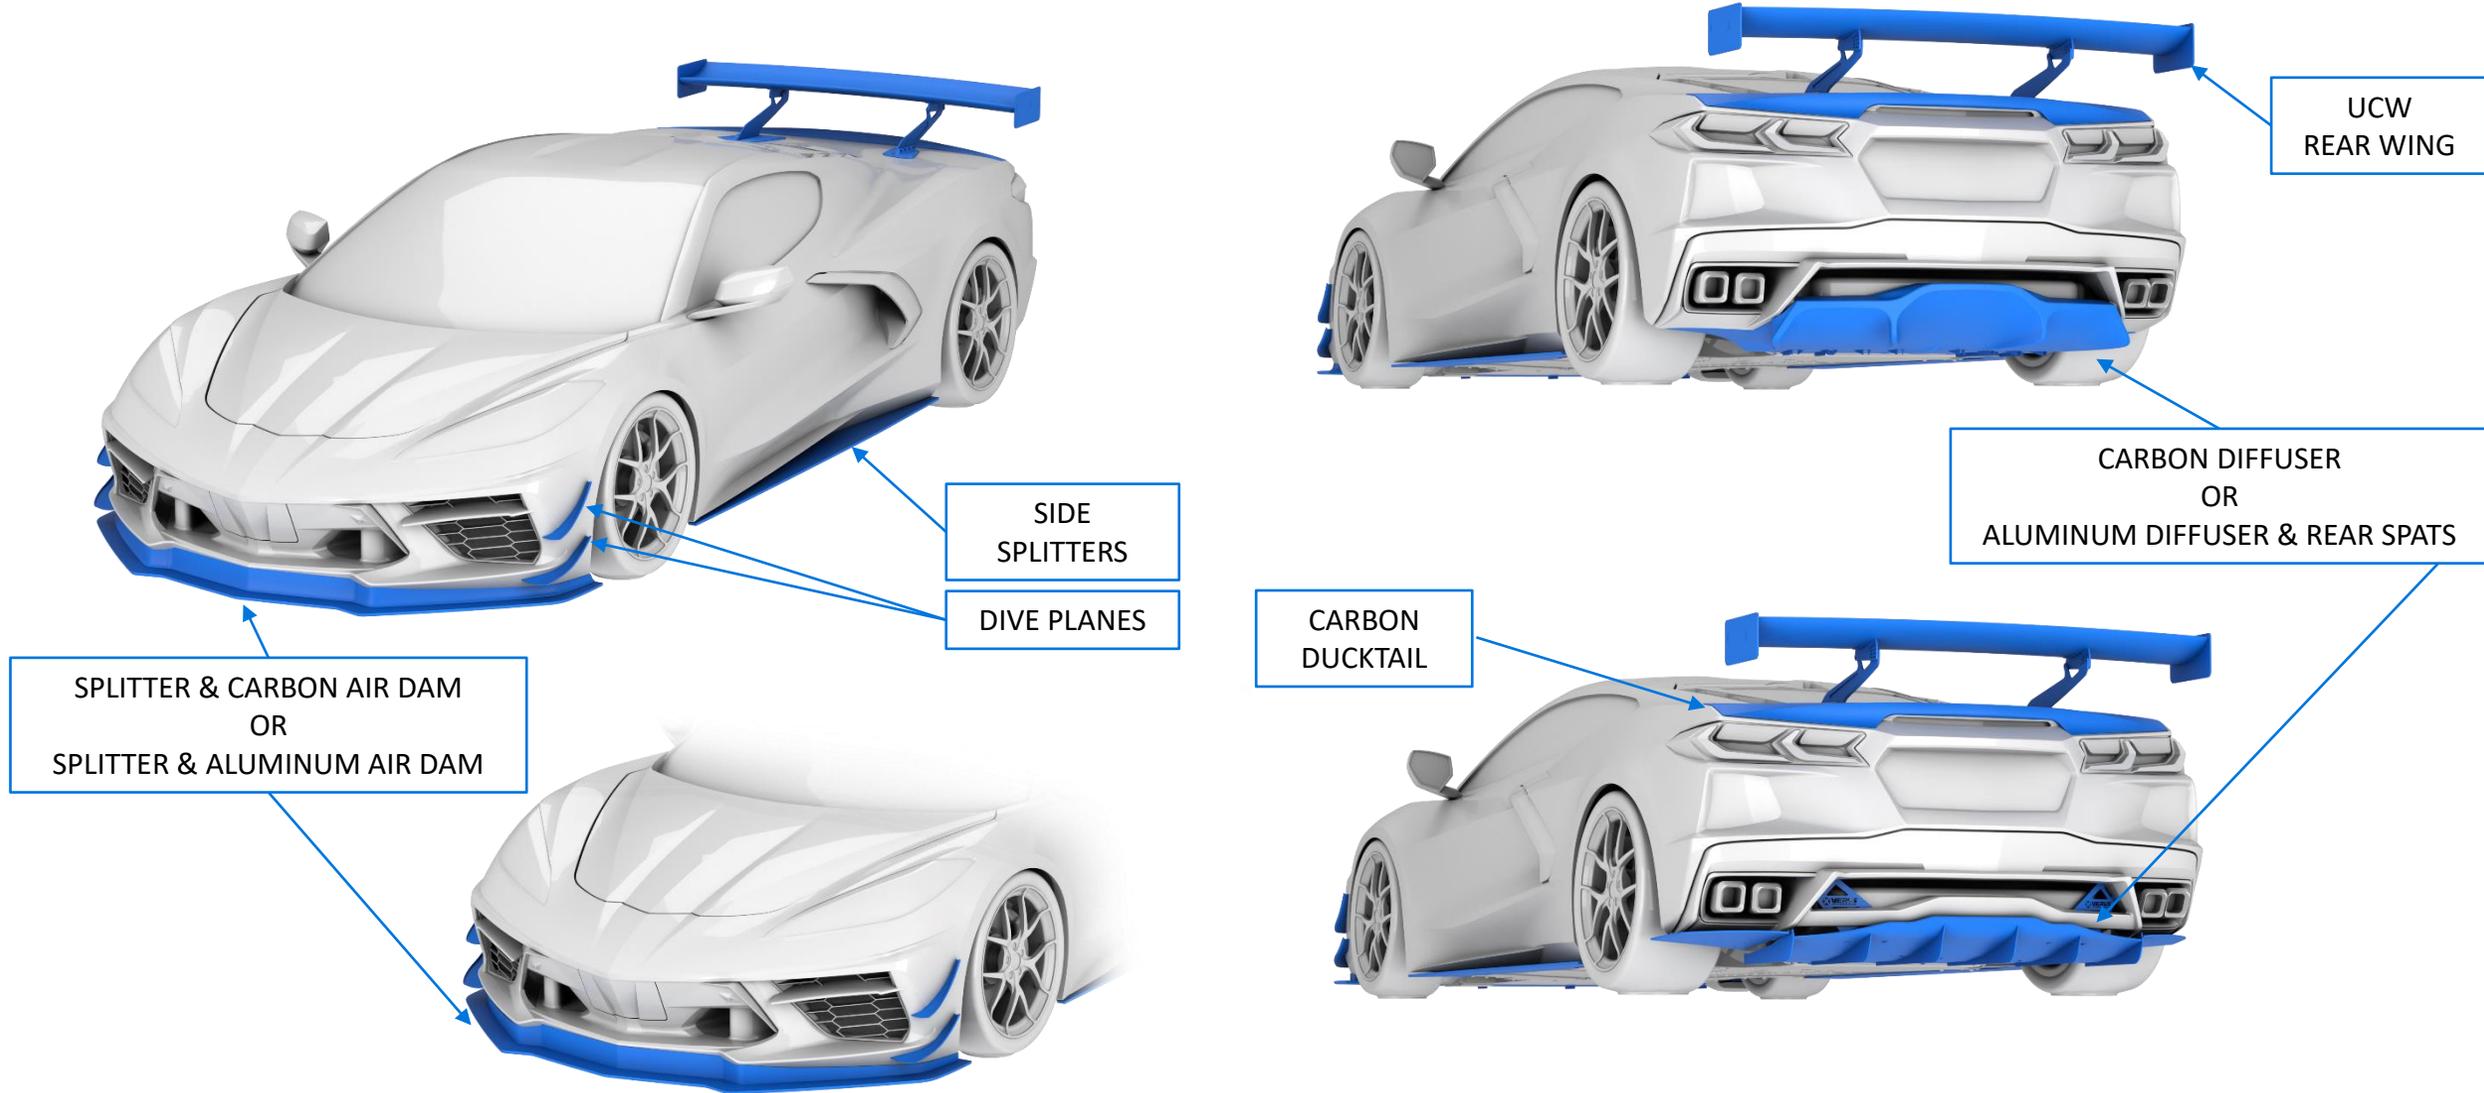

# VENTUS 2 PACKAGE (SWAN NECK)

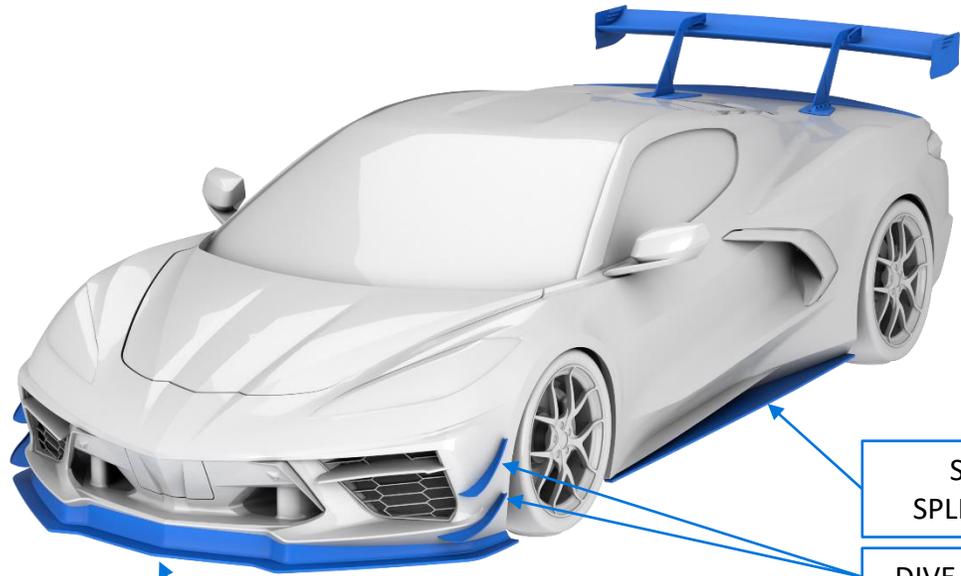

SIDE  
SPLITTERS  
DIVE PLANES

SPLITTER & CARBON AIR DAM  
OR  
SPLITTER & ALUMINUM AIR DAM




UCW  
REAR WING

CARBON DIFFUSER  
OR  
ALUMINUM DIFFUSER & REAR SPATS


CARBON  
DUCKTAIL



# VENTUS 3 PACKAGE

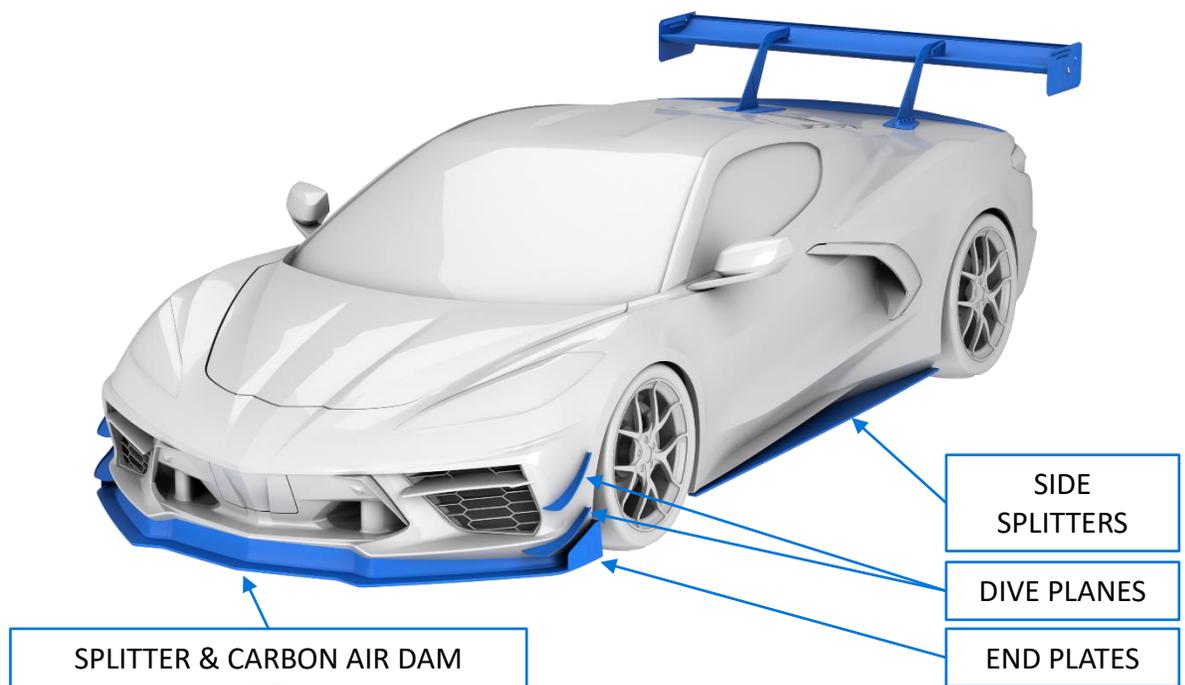


SPLITTER & CARBON AIR DAM  
OR  
SPLITTER & ALUMINUM AIR DAM

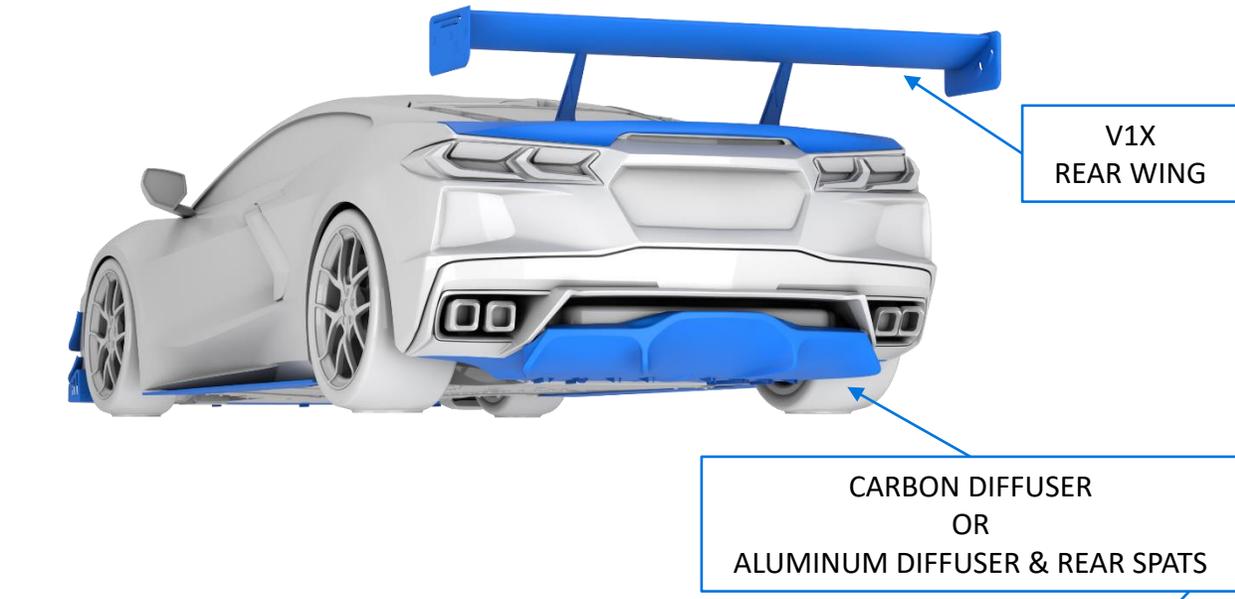



# DIVE PLANE / CANARDS

- Dive planes are great for customers looking for a slight bump in front downforce and no reduction in ground clearance.
- Verus Engineering develops dive planes to produce downforce by controlling the flow around the vehicle, not on the units themselves, improving efficacy.
- A small amount of downforce is produced on the units themselves, high pressure on top, low pressure on bottom.
- We develop the dive planes to create a beneficial vortex which helps evacuate the fenders.
- This evacuation reduces lift on the body, improving performance.
- The dive planes are produced from 2x2 twill carbon fiber finished in an automotive clear coat. Templates are supplied to ensure location of the units are correct.

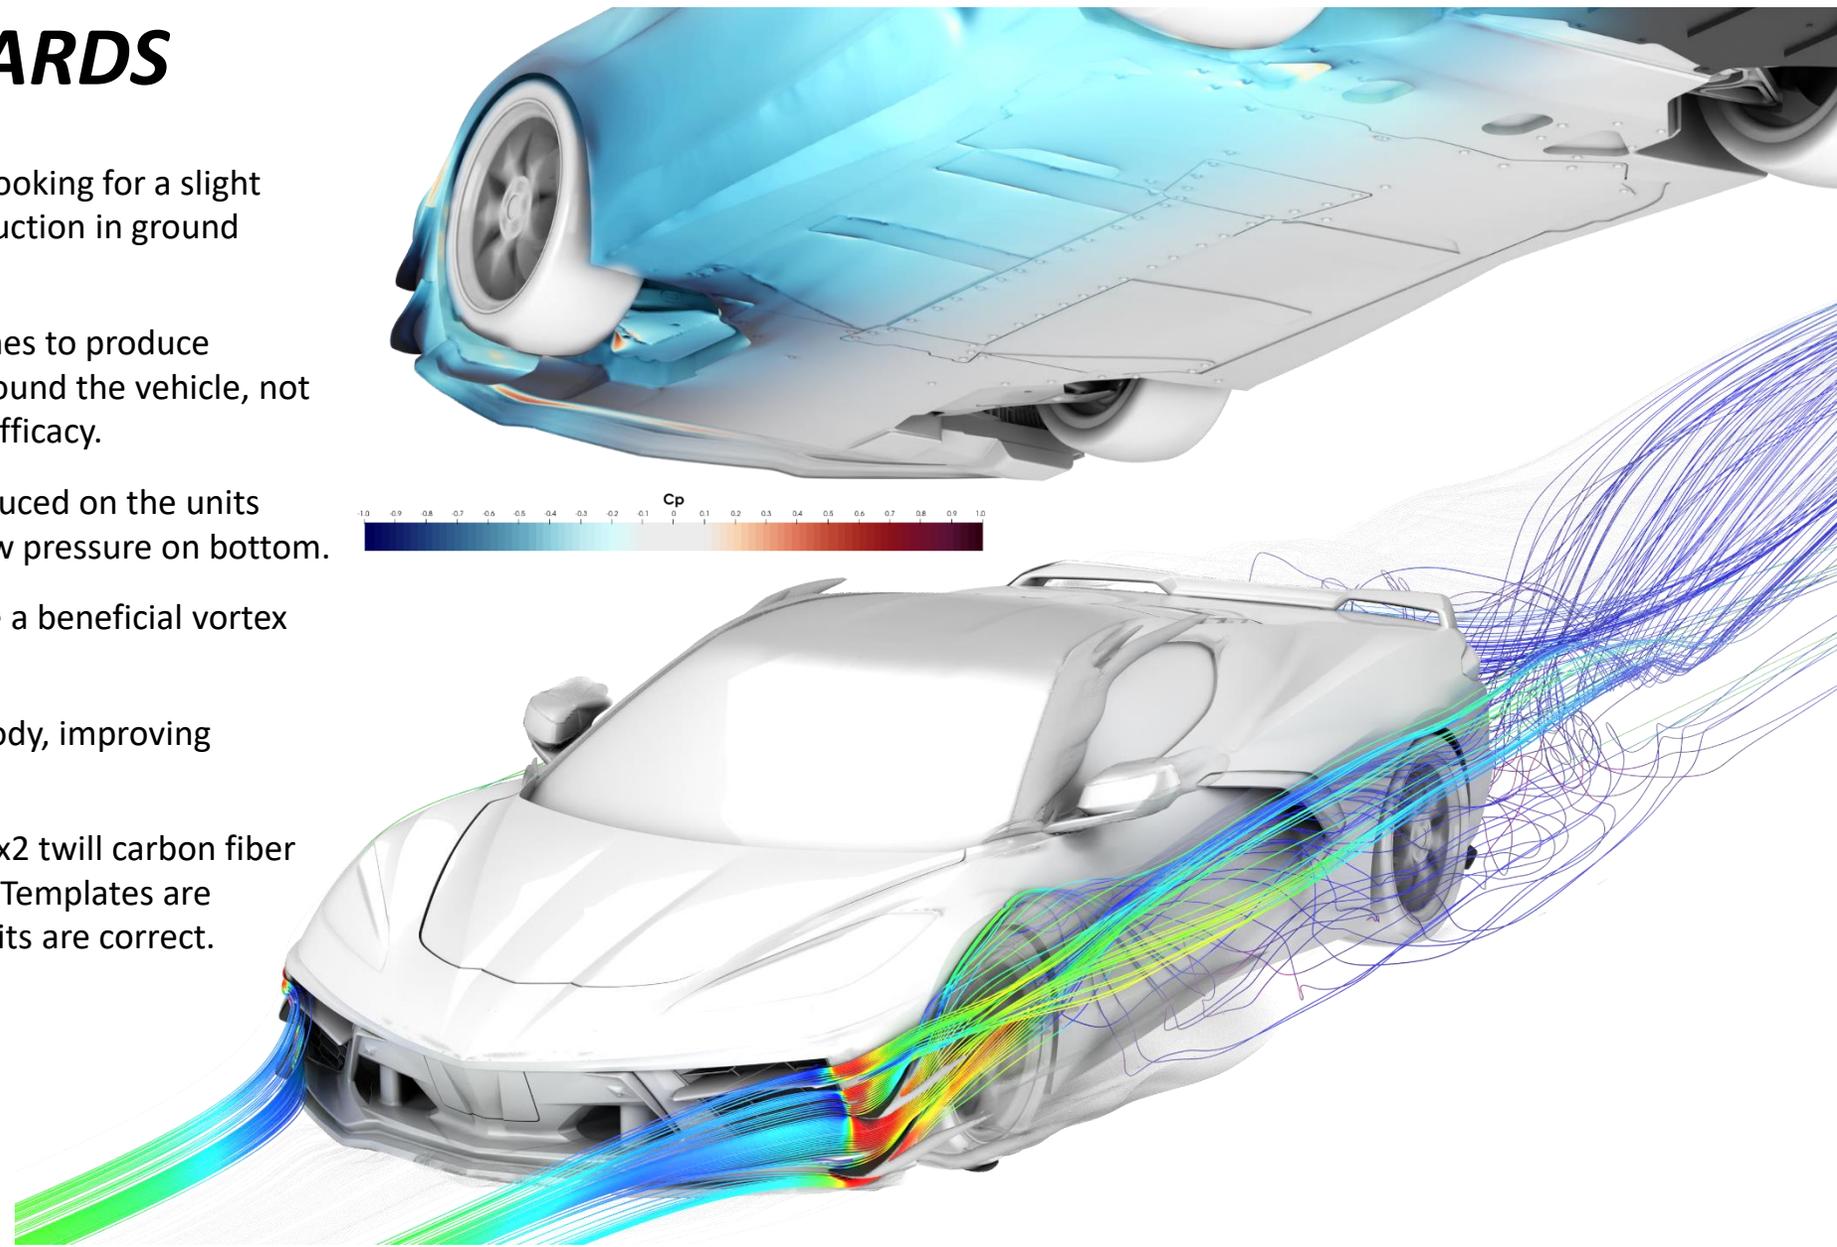



# DIFFUSER (ALUMINUM)

- The rear diffuser is a key component in creating efficient downforce.
- A diffuser is perfect for a street car as it will add stability (downforce) \*and\* reduce overall drag, when designed properly.
- The diffuser functions by creating low pressure on the bottom surface and reduces drag by filling in the wake region behind the vehicle.
- A large portion of drag on road vehicles is pressure drag, which is the low pressure region behind the car.
- This low pressure region (aka wake region) creates a force that pulls rearward on the car.
- Using CFD and good design practices, we developed a solution that creates downforce and reduces drag.
- This rear diffuser is constructed from sheet aluminum. It attaches to various chassis and bumper locations to ensure for a secure, durable, and low cost unit.

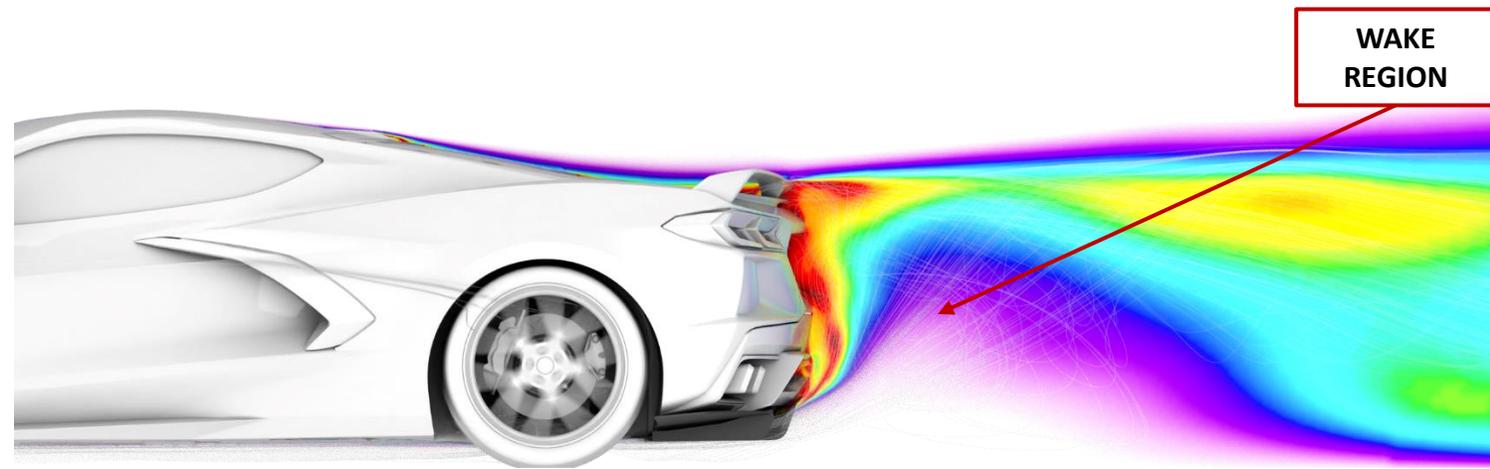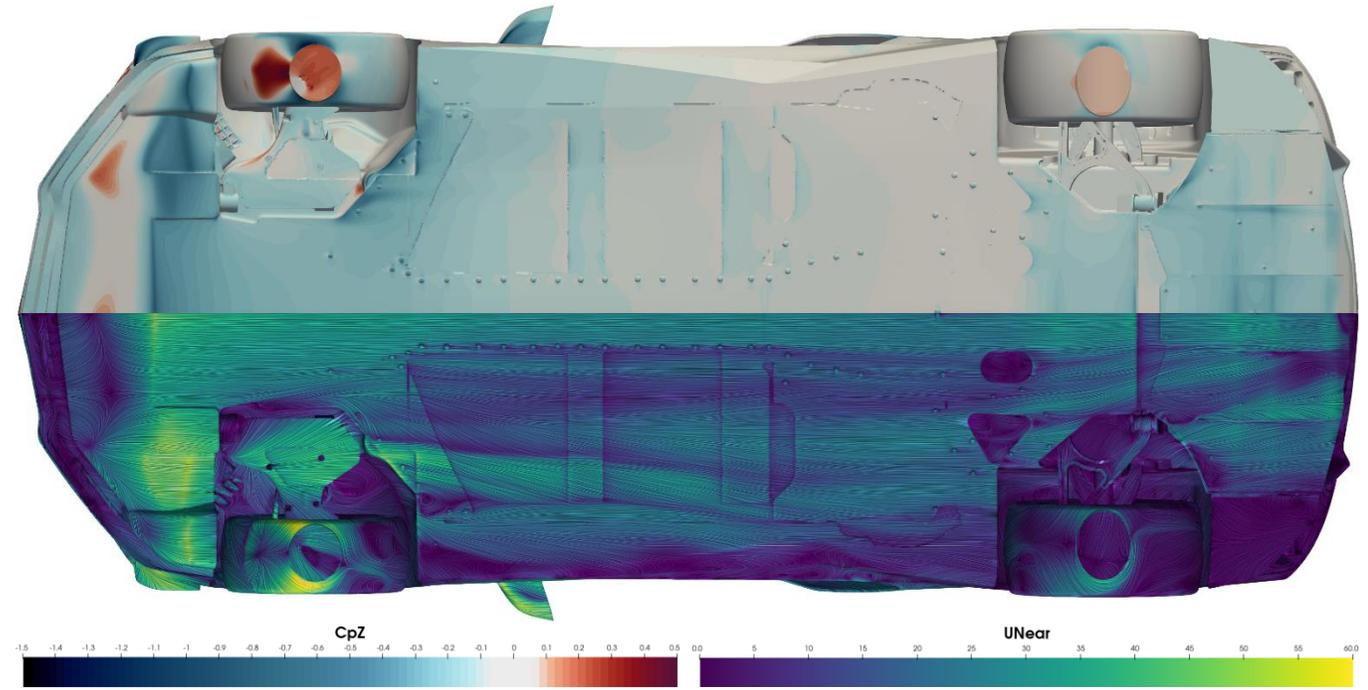


# DIFFUSER (CARBON)

- The carbon diffuser was developed with a similar methodology as the aluminum one.
- The design freedom afforded by working with carbon allowed us to create more downforce than was possible with the aluminum diffuser.
- The carbon diffuser also makes for a more exotic look that matches the ‘Stingray’ design language.
- Compare the CpZ plots to the right. When paired with our Ventus 3 package the blue areas (downforce) on the floor and diffuser are much larger and darker in color. This illustrates how our splitter and rear wing can work together with the diffuser. The same applies to the aluminum diffuser, with slightly lower peak performance.

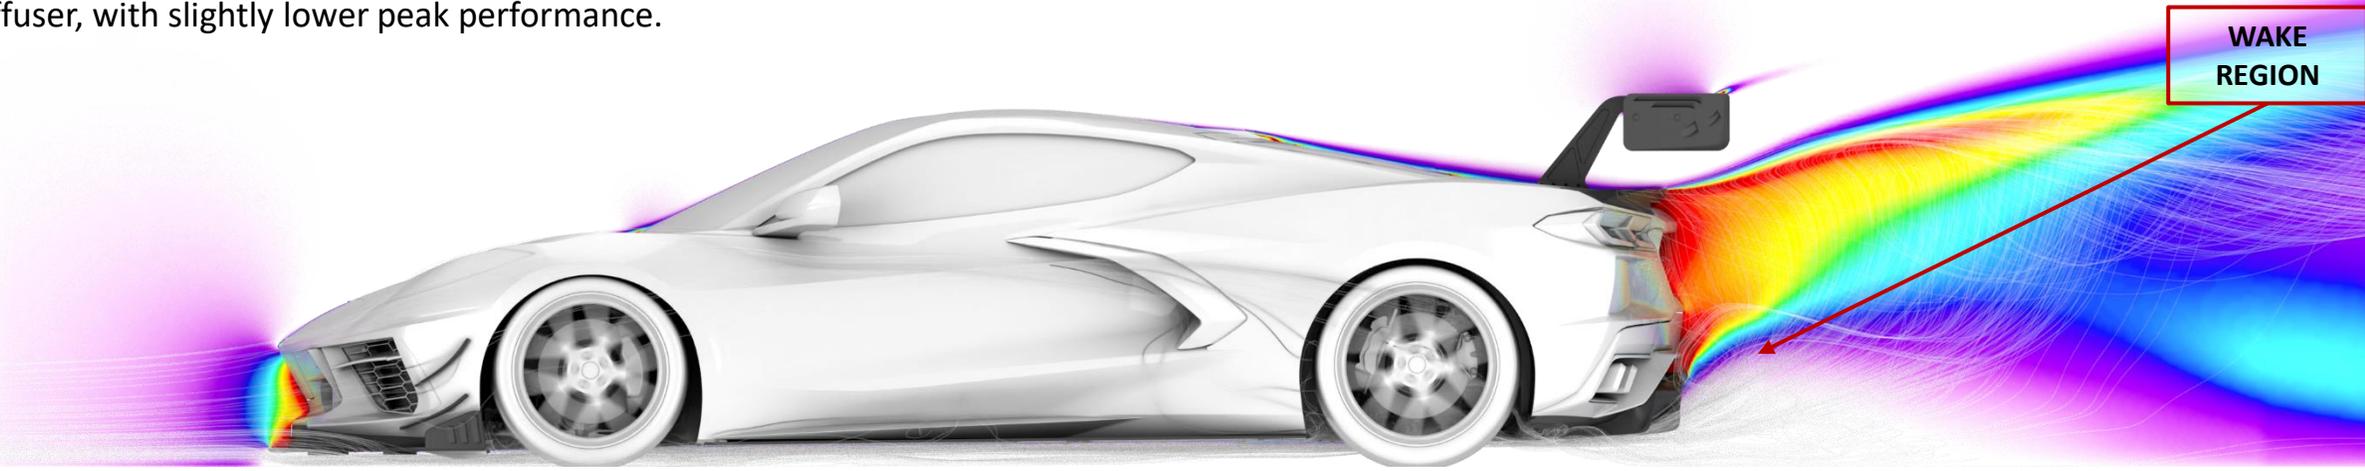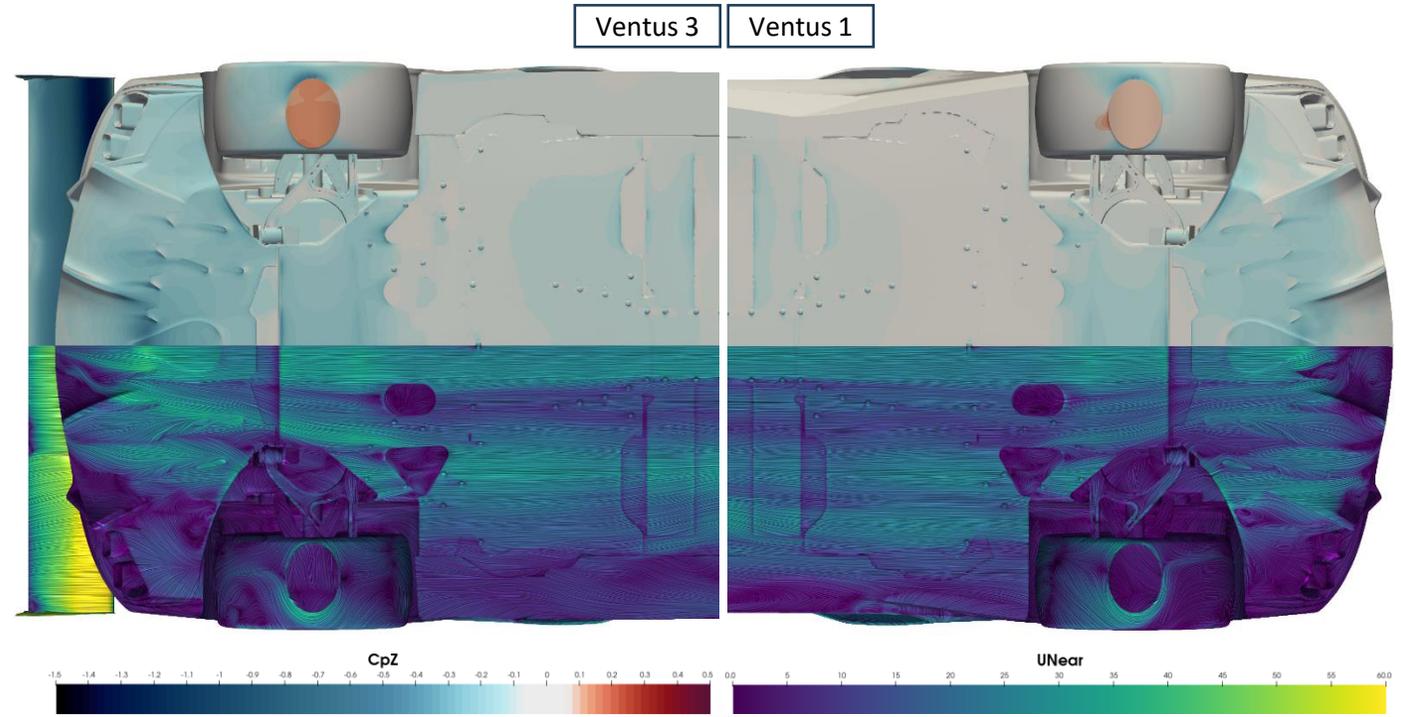



# SPLITTER

- The splitter is great for customers looking to generate significantly more front end downforce.
- The entire splitter assembly is modeled and simulated. Including front heat exchangers exiting in the wheel well.
- Front splitters are very efficient aero devices.
- High pressure on the top side helps drive the splitter downward at speed.
- The bottom side, like the rear wing, produces more downforce than the top side.
- The Verus Engineering splitter includes surfaced sections to feed the factory diffusers for improved performance.
- Optional End Plates provide an additional bump in downforce. They also significantly shift aero balance forward. This allows the use of more wing angle, or the addition of the V1X rear wing.
- Our splitter is a motorsports grade composite material. Carbon Polyweave is rigid while exhibiting excellent wear characteristics. Where traditional carbon fiber components may fail due to an impact, the Carbon Polyweave will not.

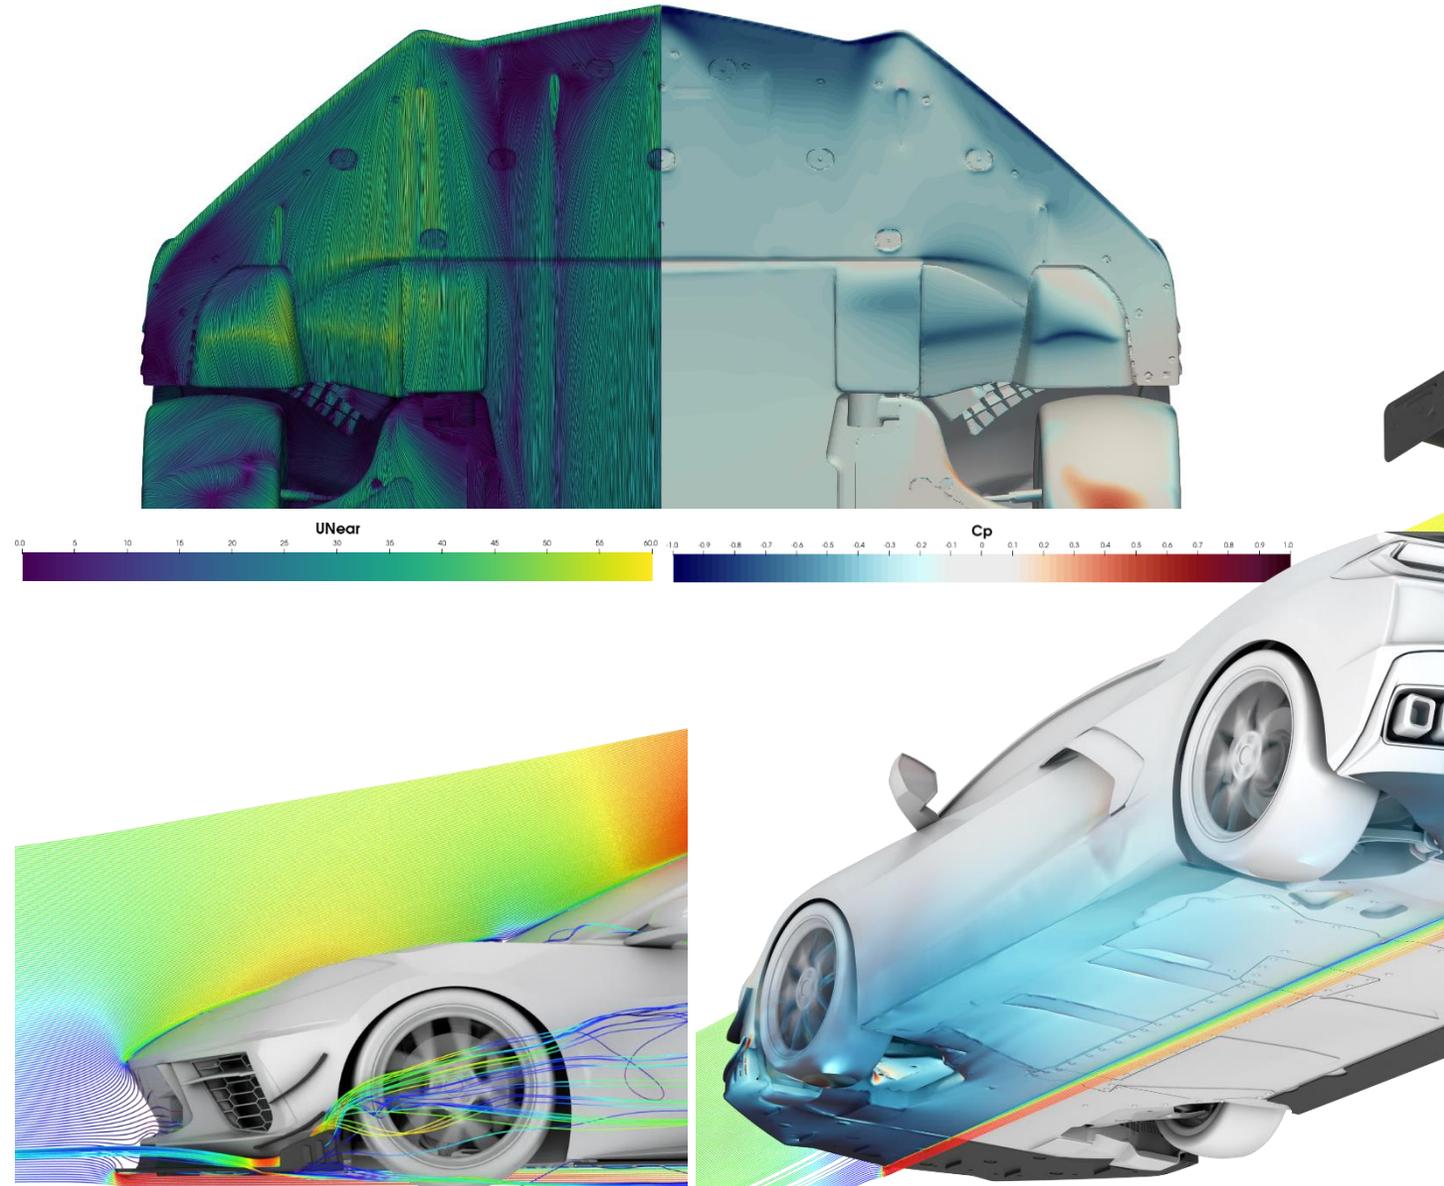


# SIDE SPLITTERS

- Side splitters reduce the amount of high pressure air from the top side of the vehicle making it under the vehicle.
- We focused on designing the units to clean up underbody airflow during turning or high yaw conditions.
- The increase in downforce is centrally located on the vehicle and the aero balance is minimally affected.
- Our side splitters are made with a motorsports grade composite material. Carbon polyweave is rigid while exhibiting excellent wear characteristics. Where traditional carbon fiber components may fail due to an impact, the carbon polyweave will not.
- The side splitters bolt to the vehicle using supplied hardware installed in the factory side skirt locations.

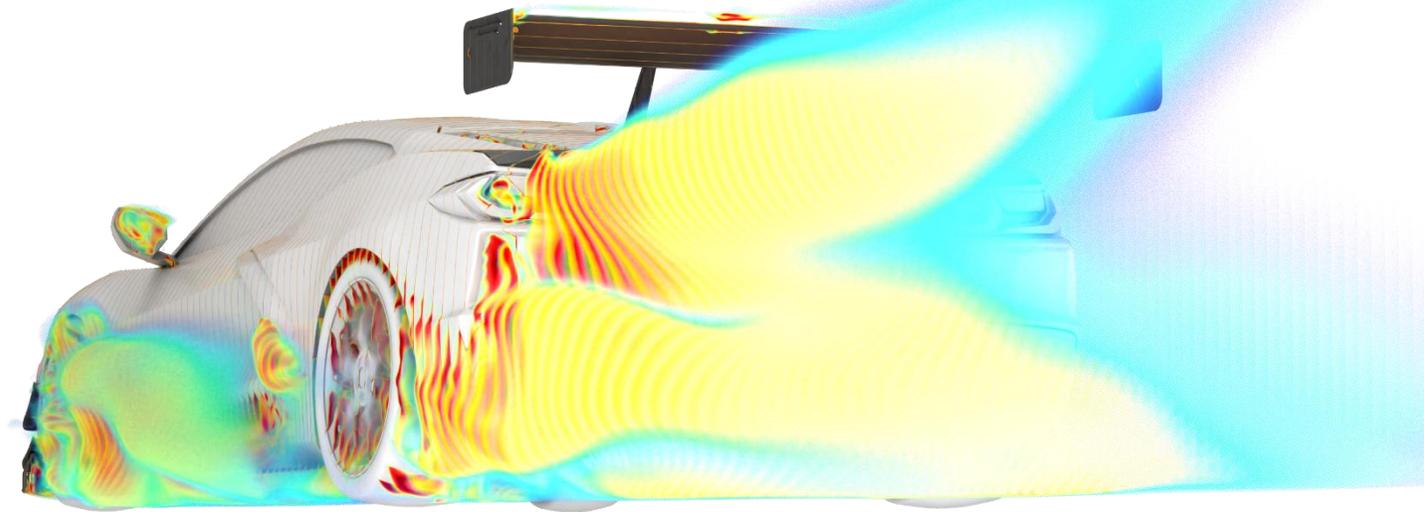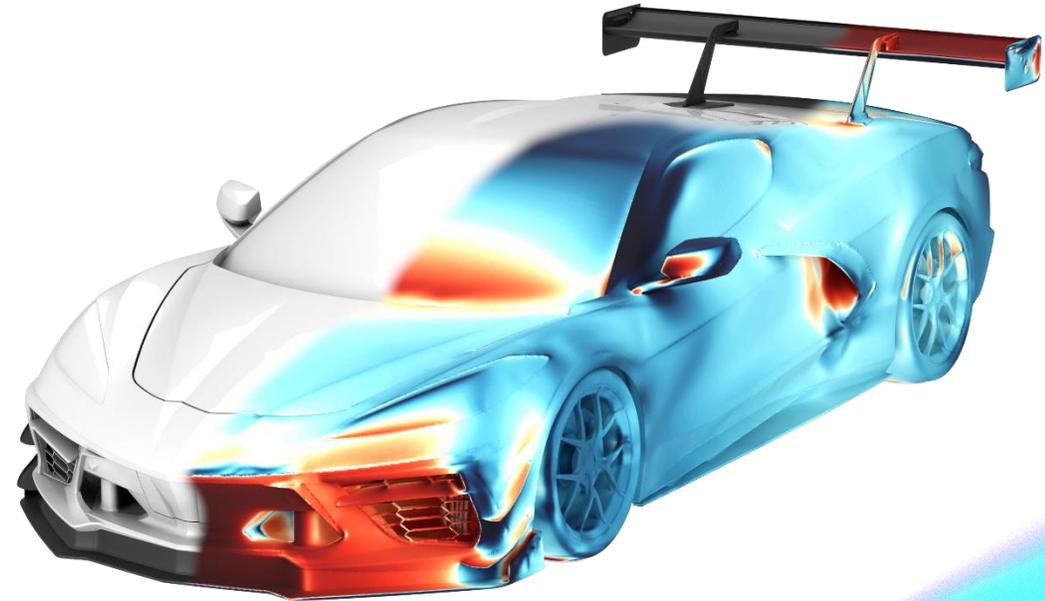


# UCW REAR WING (BTM. MOUNT)

- This rear wing is great for customers looking for a large bump in rear downforce.
- The UCW wing profile was developed in CFD and refined in the wind tunnel.
- The airfoil produces substantial downforce on the C8 Z51/Stingray.
- The bottom surface is where the majority of the downforce is generated. This low pressure pulls the car downward.
- The top surface still produces downforce, but not like the bottom surface.
- The mounts are machined from 6061 aluminum and have a lower surface matched to the contour of the OEM engine cover. They sandwich the engine cover using a large surface area lower mount. This makes for a mounting kit strong enough for our higher performance V1X element.
- The UCW is produced from 2x2 twill carbon fiber finished in an automotive clear coat.

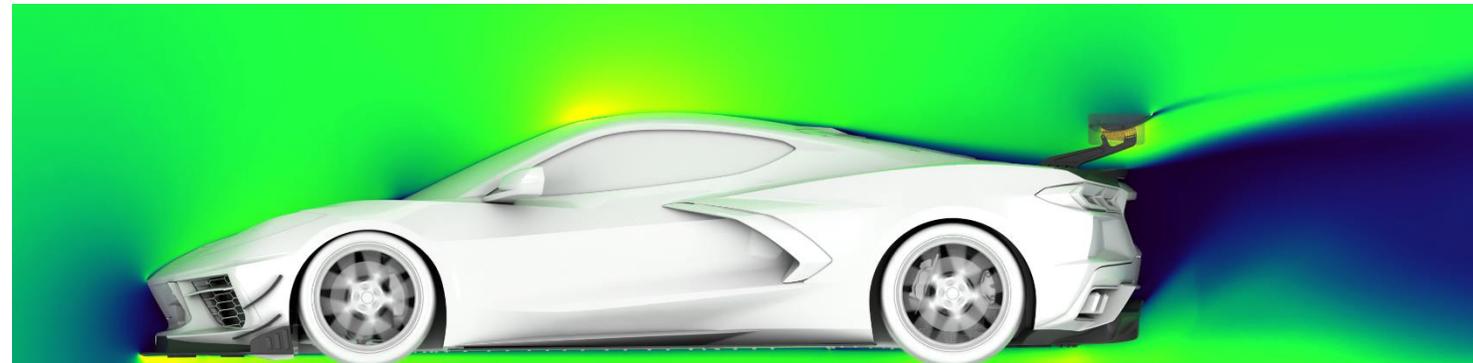

# UCW REAR WING (SWAN NECK)

- This rear wing offers a slight performance improvement over the bottom mount UCW. Total downforce and L/D are improved.
- This wing uses the same CFD developed and wind tunnel refined wing element as the bottom mount wing.
- The bottom surface is where the majority of the downforce is generated. This low pressure pulls the car downward.
- The top surface still produces downforce, but not like the bottom surface.
- Switching to a swan neck mount has less impact on the bottom surface of the wing element. However, our wings position the uprights in-line with the engine cover vents since it is already a location of disrupted airflow. The impact of the engine bay flow means that the performance improvement from switching from bottom mount to swan neck isn't as large as it may be for other platforms. In this case, choose the one that looks the best to you!
- The swan neck UCW is fixed to the vehicle using the exact same components as the bottom mount UCW, making for a streamlined path to altering the look of your C8. The UCW is produced from 2x2 twill carbon fiber finished in an automotive clear coat.

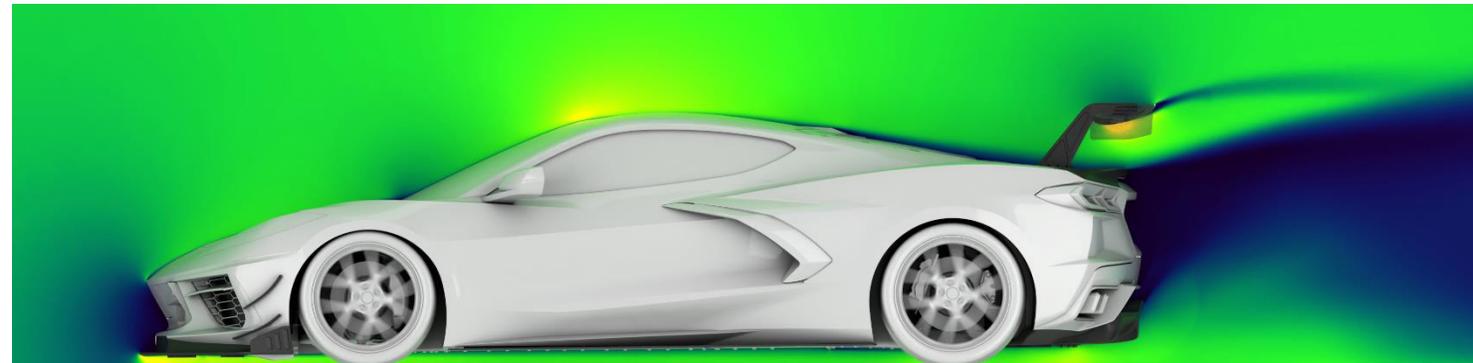

# V1X REAR WING


The same methodology as the UCW but with capacity for much higher downforce (see charts on the following page).

The V1X was designed with efficiency in mind:

- The airfoil shape was optimized using adjoint and optimization methods in CFD and correlated in the wind tunnel.
- Slots on the endplate decrease vortex energy off the endplate. Decreasing vortex energy reduces pressure drag.
- Swan Neck mount provides the V1X with cleaner air and more bottom surface area to make more efficient downforce.
- 1850mm is the default wing width for the C8. However, you can custom order the width you want up to 1950mm.




	Ventus 2 UCW @ 12°AOA	Ventus 3 V1X @ 1.9° AOA	Percent Difference
Chord (mm)	250	300	+ 20%
Downforce (lbs) @ 120 mph	660	674	+ 2.1%
Drag (lbs) @ 120 mph	448	426	- 4.9%
Balance (% Front/Rear)	32.2/ 67.8	37.3 / 62.7	+ 15.8%

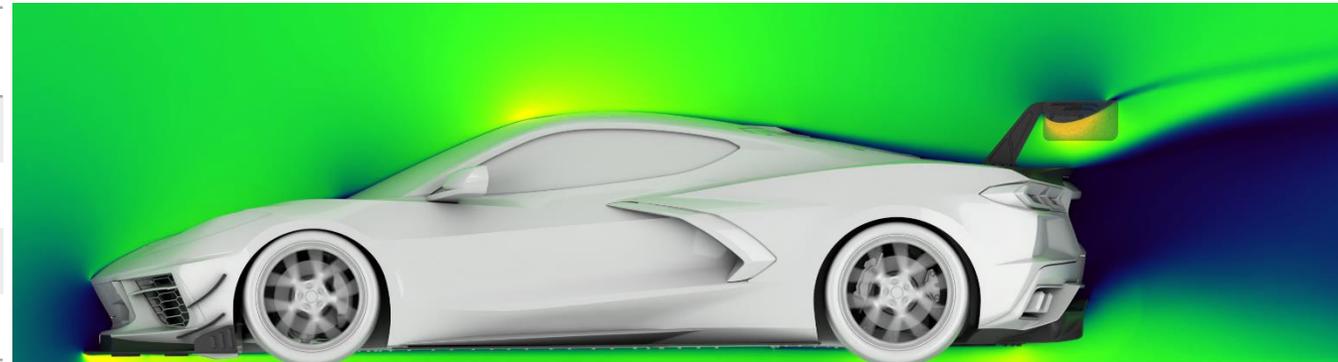


# SUMMARY : UCW & V1X REAR WINGS

### Verus Engineering UCW Wing


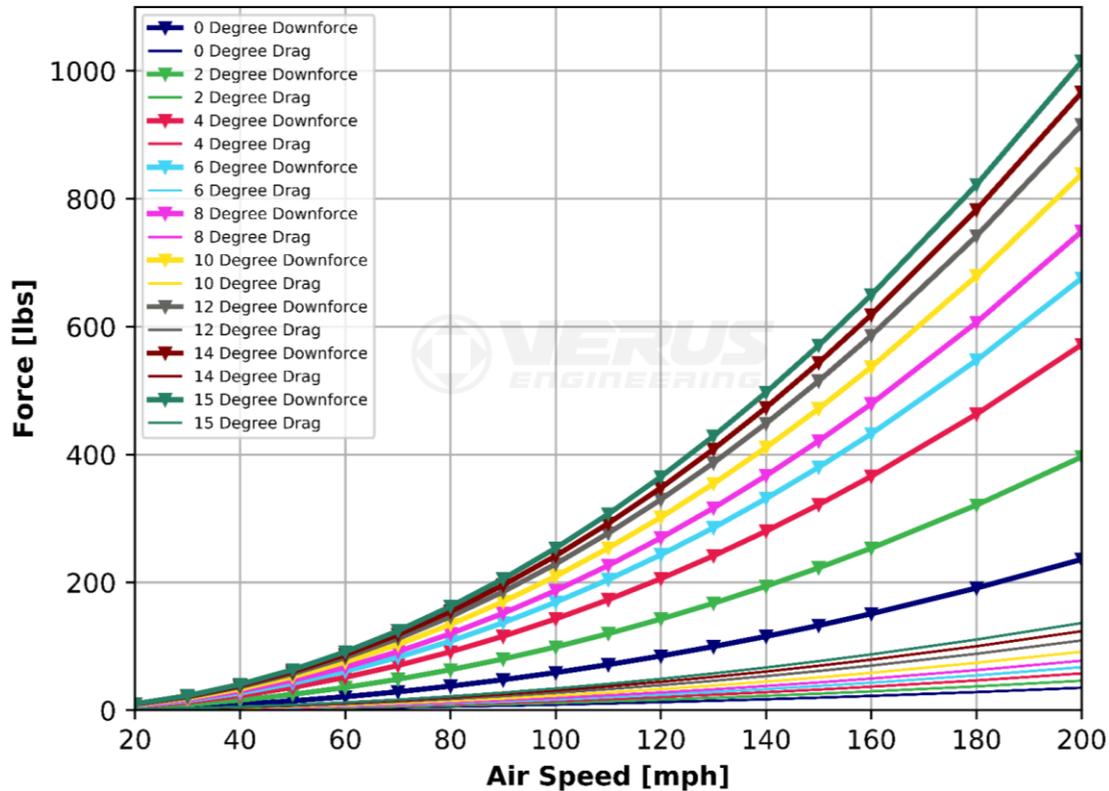


### Verus Engineering V1X Wing

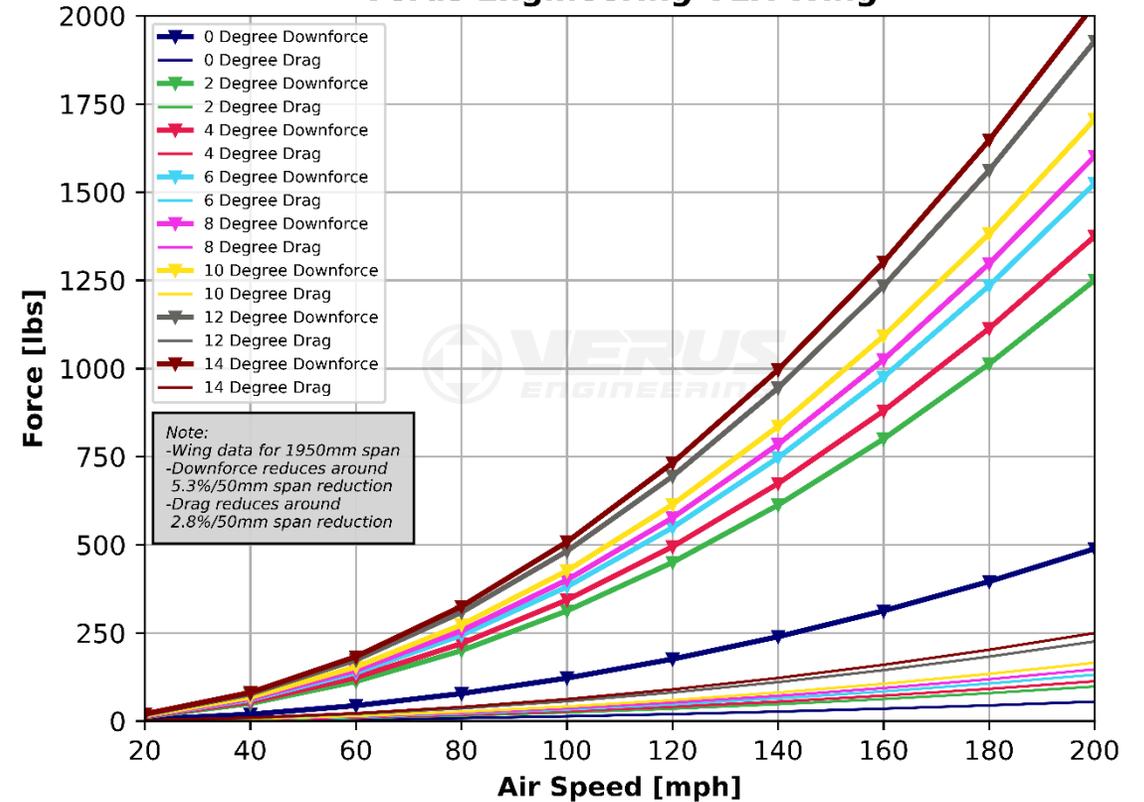



# DUCKTAIL SPOILER

- Much like the dive planes, Verus Engineering developed the ducktail spoiler produce downforce by controlling the flow around the vehicle, not on the spoiler itself.
- Removing the ducktail spoiler from a Ventus 3 equipped C8 reduces total vehicle downforce by 10.6%
- The ducktail spoiler also provides an aesthetically pleasing way to cover holes the holes in the rear bumper when removing a factory installed spoiler/wing.
- The ducktail spoiler was designed to follow and accentuate the factory body lines, adding a hint of aggression.

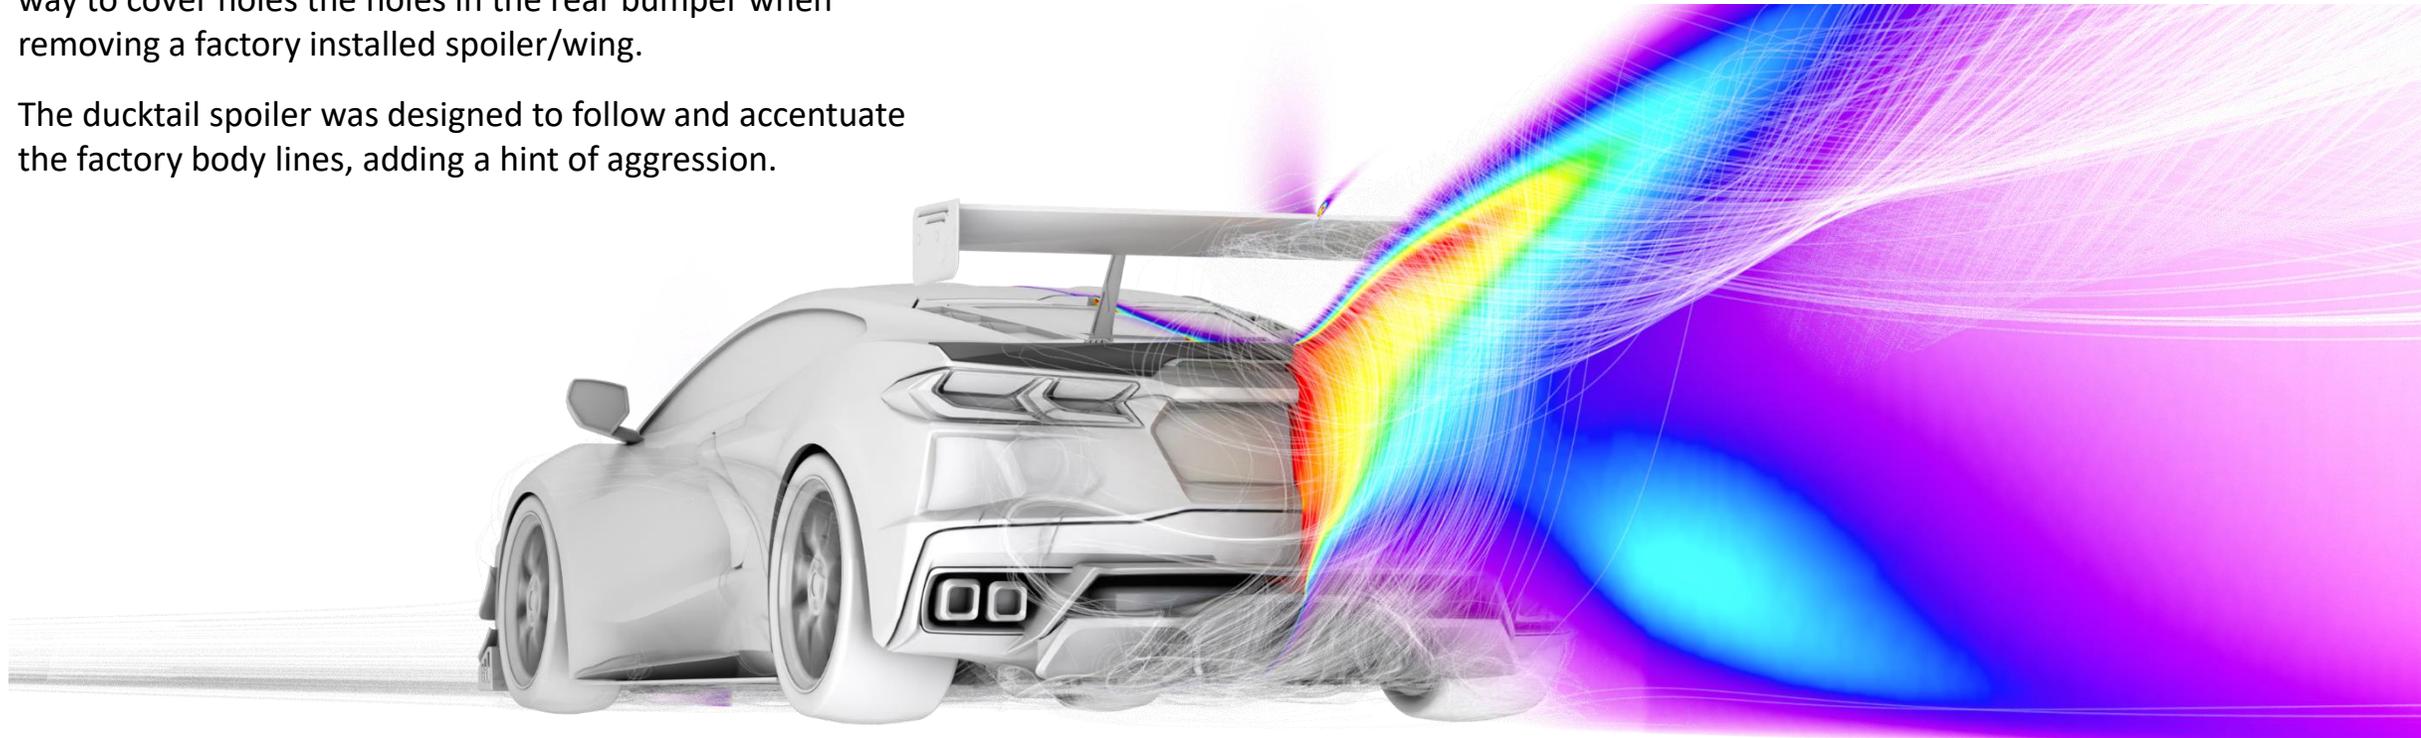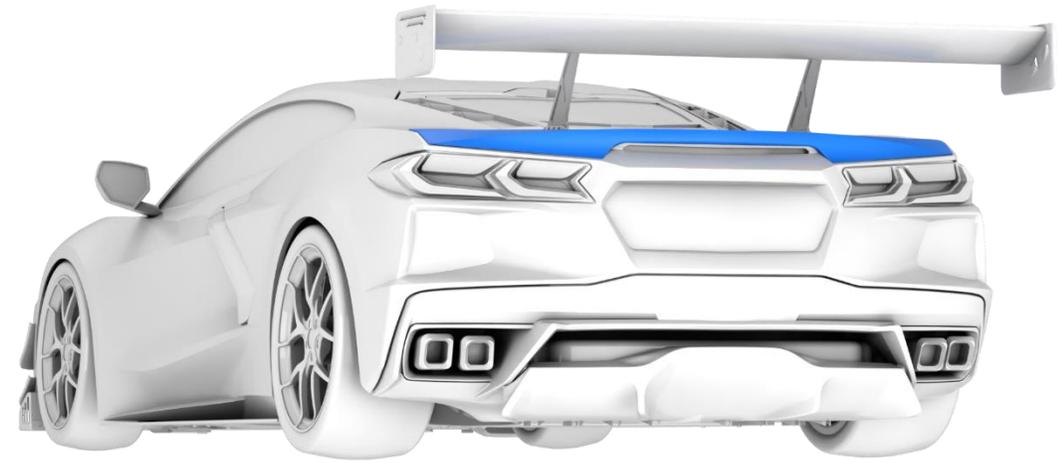

# BRAKE DUCT BLOCK-OFF

- The C8 comes with really good brake cooling compared to what is typically seen on an factory street car.
- In some situations the cooling provided by this ducting may be excessive.
- This has mainly been seen on track cars with big brake kits. The extra size, thermal capacity, as well as aggressive track-use brake compounds.
- Adding the brake duct block-off increased total downforce by 4% and reduced total drag by 0.8%. Front balance changed from 18% to 23%. This test was done on the Ventus 3 package, with carbon diffuser and a 10° wing angle.
- The Cp plot in the bottom right shows the difference between Cp with the block-offs and without them. Red areas are areas where pressure is higher with the brake duct than without. Blue areas are of lower pressure with the duct than without.
- The block-offs can serve as an aerodynamic balance tuning device, just ensure you are confident in your braking performance and proceed with caution when removing cooling capacity.

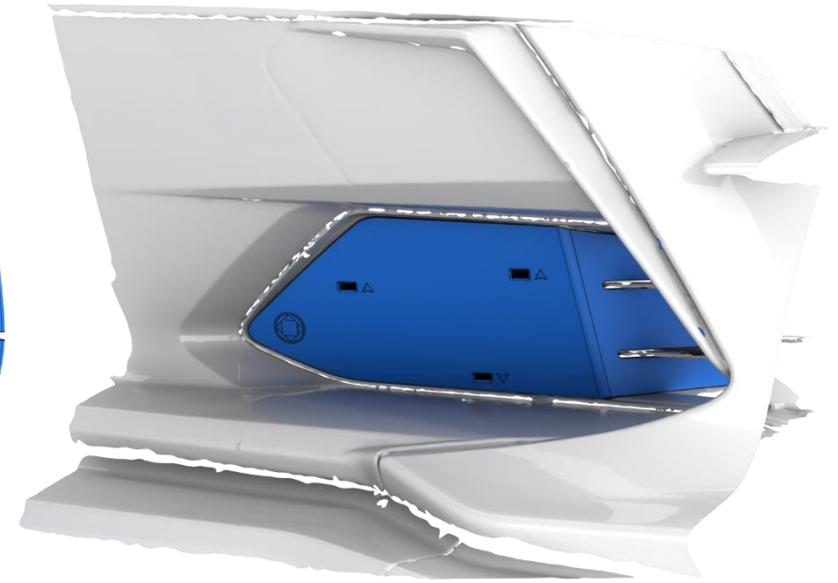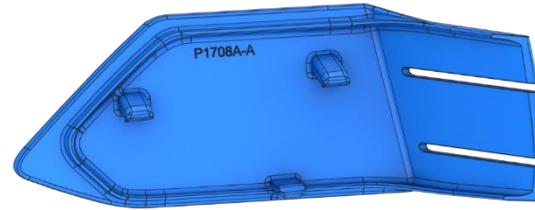


# SUMMARY

- The Verus Engineering Ventus Packages for the C8 Stingray/Z51 platform are designed to decrease lap times utilizing well developed and functional aerodynamic components.
- These packages are designed to fit like OEM and increase the factory performance all while keeping the factory warranty.
- The components increase vehicle performance.
- The R&D of the packages was done using cutting edge technology in CFD, knowledge gained through wind tunnel testing, track testing with professional driver, and proven designs from past work.
- The individual components can be installed without the full package, though to ensure a safe balance, we recommend the packages.



# QUALITY OF CAD MODEL


- The CAD model is a crucial aspect of accuracy.
- Bad inputs result in bad outputs.
- The CFD simulation is only as good as the geometry and setup of the CFD analysis.
- The C8 was scanned in house and a 3D CAD model was created from this scan.
- The image to the right shows the overlay of the CAD model (gray) and the scan (blue).
- The surfaces are less than 1mm off from the actual scan model in the “worst” locations, with most of the car being less than this.
- Through ducts and front radiator ducting were modeled for improved analysis accuracy.

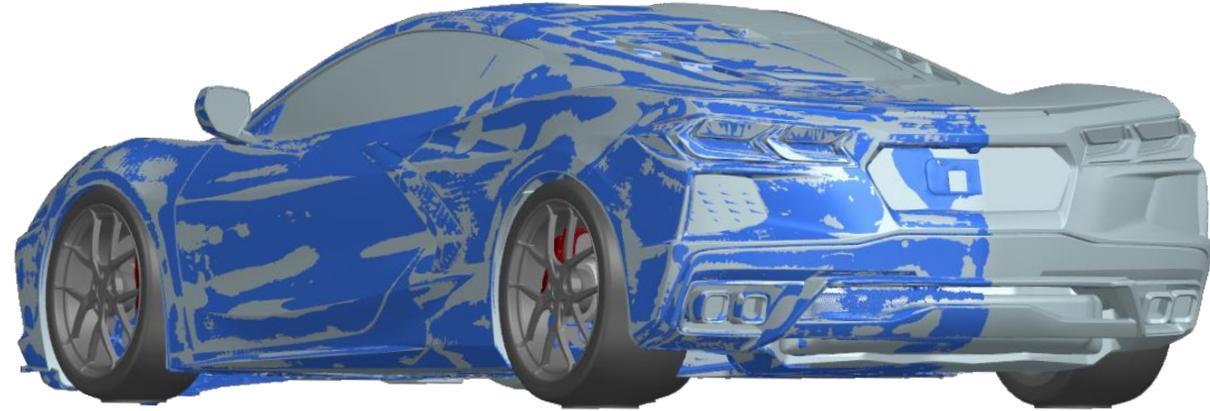

# THE SCIENCE

The development was done using OpenFOAM v2106 which is a finite volume CFD software. The solver was SIMPLE and the turbulence model was K-Omega SST using standard wall conditions. We use standard automotive arrangement when setting up boundary conditions and running a full-car. Most of the cases simulated used a slight yawed airflow of 0.5 degrees. This yawed airflow is to ensure we are not analyzing a condition the car will almost never see which is perfectly straight airflow down the length of the car. Other ride heights and yaw rates were also used to simulate cornering.

The use of porous flow was used for all the cooling stacks on the car. The darcy-forchheimer values used were based on past work of similar radiators/heat exchangers. All five coolers in the front were used for the porous flow.

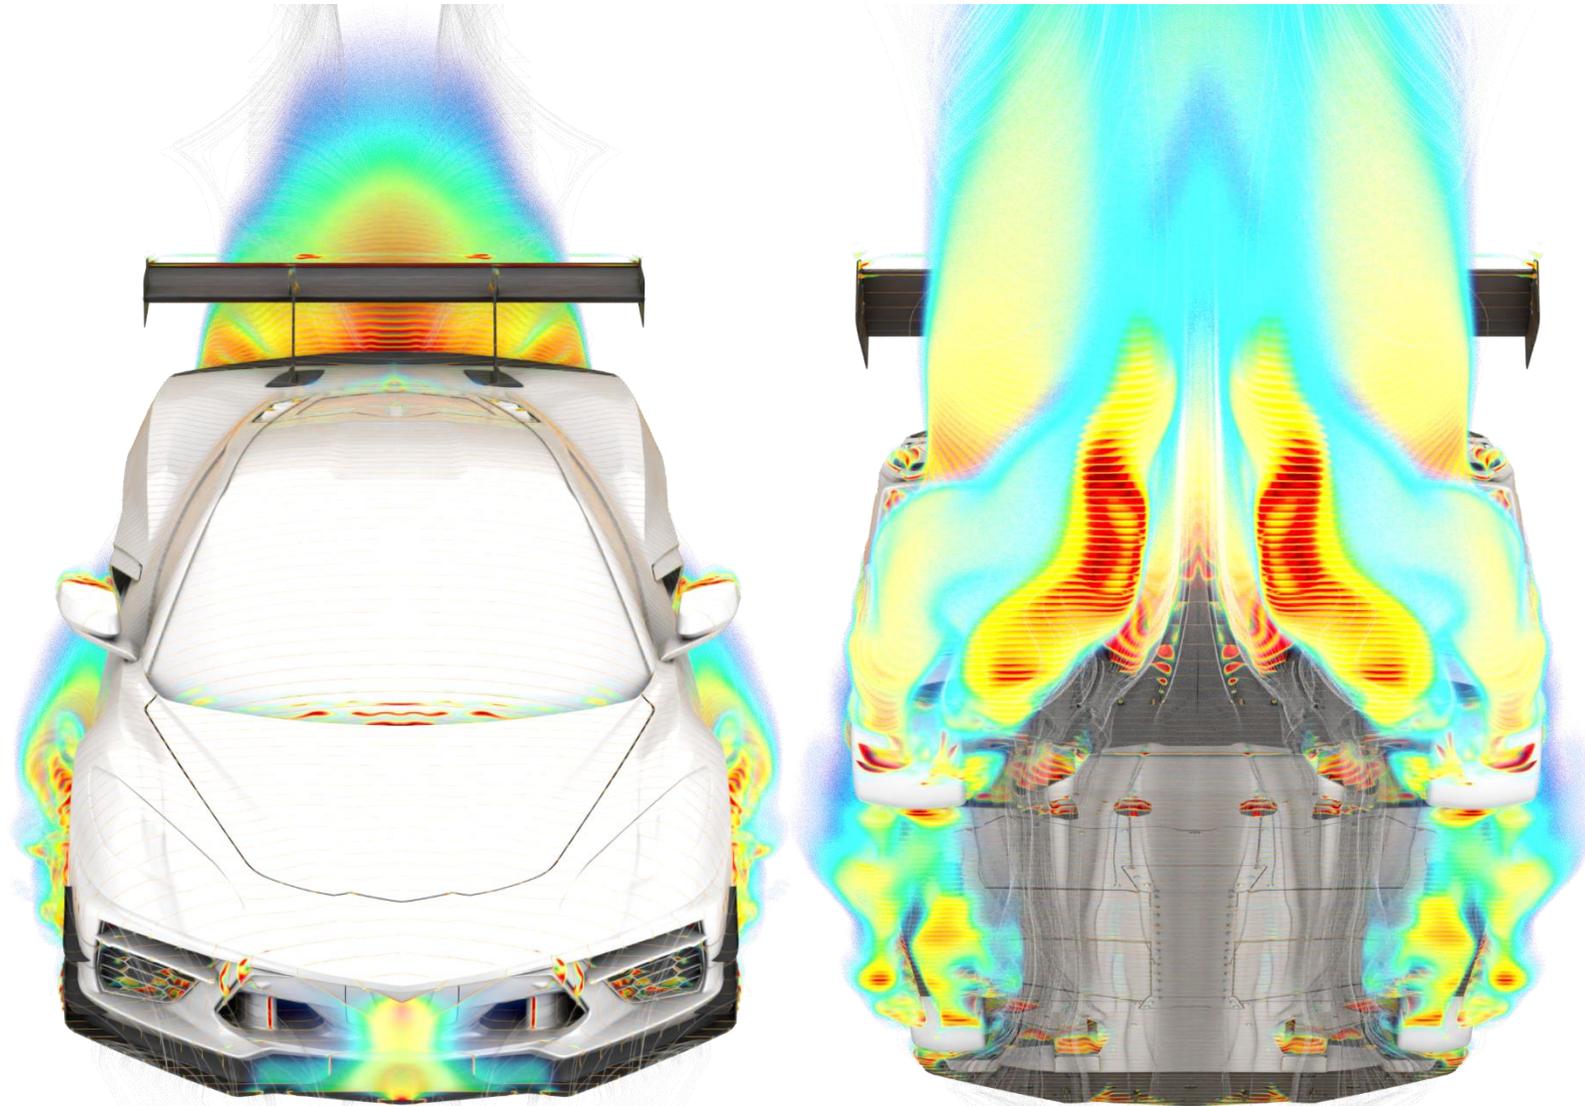

# DEFINITIONS

1. **Coefficient of Pressure (Cp)** = This is a dimensionless number which describes relative pressure to atmospheric pressure. A Cp of 0 equates to atmospheric pressure while a number below 0 represents low pressure and a number above 0 represents high pressure.
2. **CpX** = This is a dimensionless number which describes Cp normal to the x-direction. This helps us visualize locations which create drag. Red represents locations which are creating drag, while blue represents locations where thrust is created.
3. **CpZ** = This is a dimensionless number which describes Cp normal to the z-direction. This helps us visualize location which create downforce or lift. Red represents locations which are creating lift, while blue represents locations where downforce is created.
4. **Total Pressure Coefficient (CpT)** = This is a dimensionless number which describes total energy of the airstream. It is the sum of static pressure and dynamic pressure.
5. **Wall Shear** = This is a force per unit area due to fluid friction on the wall. This is used to visualize areas of separation and rapid changes on the surface.
6. **LIC Plot** = Line integral convolution (LIC) is used to visualize “oil” flow on the surface. It is a great way to correlate to flow vis testing and to study the flow on the surface of the vehicle.
7. **Streamline** = These are fluid tracers which are used to visualize where the air is going or coming from. These are normally colored as velocity where red is high-velocity and blue is low-velocity.
8. **Points** = One point is considered 0.001 of a coefficient. This is used in coefficient of drag (Cd) and coefficient of lift (Cl).